



SAVE THESE INSTRUCTIONS

Note: This Luminaire is designed for use with Hinkley approved 12 volt landscape systems. Connection to other systems may cause premature failure or non-intended operation.

LUMINAIRE ASSEMBLY:

1. Unpack luminaire head & stem (there are no serviceable parts in the LED engine. Removal or dismantling the LED may render the luminaire nonfunctional).
2. Place luminaire head over stem and thread clockwise until seated snugly.
3. Place top shade (not shown) over Luminaire head and thread until securely fastened.
4. Proceed to mounting instructions below.

LENS REPLACEMENT:

1. Remove top shade (not shown) by turning in counter clockwise direction.
2. Grasp luminaire head below harp and turn harp in counter clockwise direction.
3. Remove harp and frosted dome lens.
4. Replace lamp and follow steps 1-3 in reverse order.

LUMINAIRE MOUNTING: (for typical ground stake mounting)

1. To prevent electrical shock, disconnect transformer from electrical supply before installation or service.
2. Run wire from Luminaire through mounting hole in top of ground stake.
3. Attach Luminaire to ground stake by threading to the mounting hole in stake until it fits snugly against the bottom of stem.
4. Place stake in desired position and insert into ground until the flange of stake is flush with ground.
5. Strip the two wire leads from the Luminaire and connect to the main supply wire using the provided silicone filled wirenuts.

INSTRUCTIONS PERTAINING TO A RISK OF FIRE, OR INJURY TO PERSONS, IMPORTANT SAFETY INSTRUCTIONS.

Lighted Lamp is HOT!


WARNING – To reduce the risk of FIRE OR INJURY TO PERSONS:

Lamp gets hot quickly! Contact only switch / plug when turning on.
Do not touch hot lens, guard or enclosure.
Keep lamp away from materials that may burn.
Do not operate the luminaire fitting with a missing or damaged shield.
Luminaires shall not be installed within 10 feet (3m) of pool, spa or fountain.


The main low voltage cable from the Luminaire is to be:

1. Protected by routing in close proximity to the luminaire or fitting, or next to a building structure such as a house or deck.
2. The main secondary wire is intended for shallow burial – less than 6 inches (15.2cm) - in order to connect to the main low voltage cable.
3. Have the length cut off so that it is connected to a connector within 6 inches (15.2cm) from a building structure, a luminaire or fitting.

Luminaire Assembly

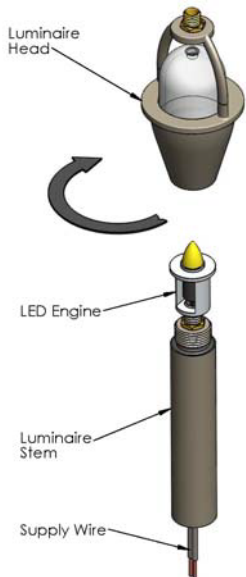

Lamp / Lens Replacement

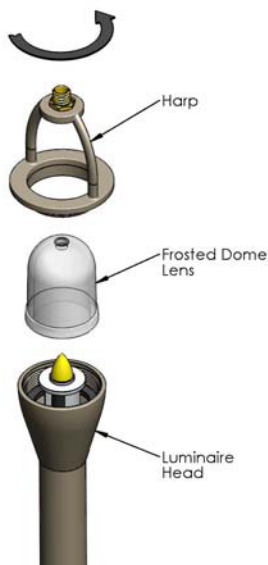

Typical Ground Stake Mounting

