



60 x 60 Plus A Series

Whirlpool & Soaking Baths

Product Features

- Durable easy-care acrylic construction
- Eight fully adjustable color matched hydro jets
- 8.5 amp pump/motor
- Pre-leveled base, for easy installation
- Factory preset air controls for whirlpool action
- Textured slip resistant bottom
- Electronic on/off switch
- Available as an invigorating whirlpool and an unjetted soaking bath

General Specifications

- 60" side length
- 21" depth overall
- 60" side width
- 72 gallon operating capacity
- 109 gallon total capacity to overflow
- Electrical service requirements: Motor 120 V., 10.5 A., 50/60 Hz., Single Phase, Class B Insulation
- Ground fault circuit protection must be provided by installer
- Prewired for simple plug-in installation



Shown with optional removable panel apron

PFW6060LPLUSA

Color Palette


- White
- Biscuit

Model Numbers

PFW6060LPLUSA	60" x 60" LH corner whirlpool
PFW6060RPLUSA	60" x 60" RH corner whirlpool
PFS6060	60" x 60" acrylic corner soaking bath
PFSK6060	Removable apron
PFTLKC	Tile flange kit for 60" x 60"
MIRPRESSHTR	Whirlpool heater

NOTE: Choose left hand or right hand based on desired pump location.

Product Specifications

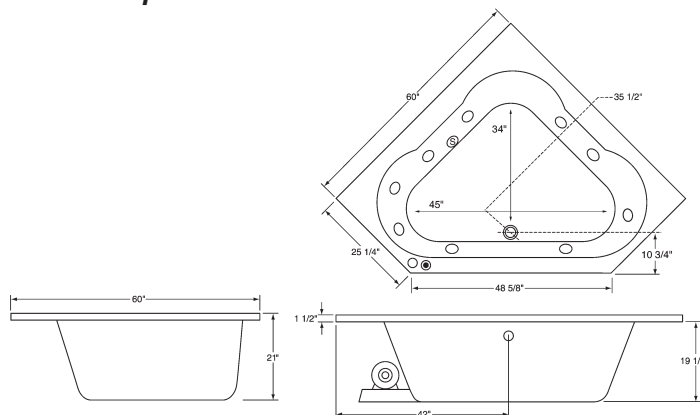

Warranty and Codes

This product features a 5-year limited warranty and meets or exceeds the following standards: Whirlpools - IAPMO PS32-84, UL listing 27E7, ANSI Z124.1-95, ASME A112.19.8M-87R(96) and ASME A112.19.7M-95. Baths - ANSI Z124.1-95. In an effort to continually improve our products, design changes may periodically be made. We reserves the right to provide newly designed material to fill any order unless otherwise agreed to in writing.

Construction

This PROFLO Whirlpool is constructed of the highest-grade acrylic and reinforcement composites available. The plumbing system utilizes high-pressure air and waterway tubing and each joint is solvent welded and pressure tested. Each unit is leveled and performance tested before leaving the factory.

NOTE: All dimensions and specifications are nominal and may vary $\pm \frac{1}{4}$ ".
Use actual products for accuracy in critical situations.

