

Jerritt Series

High-Efficiency Two Piece Toilet



Product Features



- Gravity fed 1.28gpf HET, High Efficiency Toilet
- Two-piece vitreous china
- 2" fully glazed trapway
- 6" x 5-1/4" (RF) / 7" x 6" (EL) water surface
- Anti-siphon fill valve
- Jetted box rim
- Close coupled tank with cover
- Quick connect, 2 bolt tank to bowl installation
- Comes standard with a color matching trip lever
- 2" Flush valve
- Sanitary bar on all bowls
- Seat and supply not included
- 12" Rough In
- Available in round front, elongated, chair height elongated and ADA elongated
- Uses 20% less water than standard low consumption toilets
- EPA WaterSense Certified



PF1402TWH / PF5112NHEWH

Codes and Standards

- IAPMO/UPC
- ASME A112.19.2
- CSA B45.0
- CSA B45.1

Model	Model Description	Color Finishes
*PF1400T	1.1-1.6 RF UNIV BOWL	○ White
*PF1401T	1.1-1.6 EL UNIV BOWL	○ White ○ Biscuit
PF1402T 	1.1-1.6 CH EL UNIV BOWL	○ White
PF1403T 	1.1-1.6 ADA UNIV BOWL	○ White ○ Biscuit
PF5112NHEWH	HET Tank only 12" RI	○ White

* = complies with CSA B651
wheelchair symbol = complies with ADA & CSA B651



Jerritt Series


High-Efficiency Two Piece Toilet



Product Features


The combination toilet shall be made of vitreous china. Toilet shall be 1.28 gpf (4.8 lpf). Toilet shall have 2" (5.1cm) fully glazed trapway. Toilet shall include color match trip lever. Toilet shall be less seat and supply. Toilet shall be ADA compliant (PF1403T) with 17" high bowl.

	PF5112NHE /1400T	PF5112NHE /1401T	PF5112NHE /1402T	PF5112NHE /1403T
A	28-1/2"	30-1/2"	30-1/2"	30-1/2"
B	16-1/2"	18-1/2"	18-1/2"	18-1/2"
C	15"	15"	16-1/4"	17"
D	29-3/4"	29-3/4"	31"	31-3/4"
E	8-1/2"	8-1/2"	8-1/2"	8-1/2"
F	12"	12"	12"	12"
G	15-3/4"	15-3/4"	15-3/4"	15-3/4"

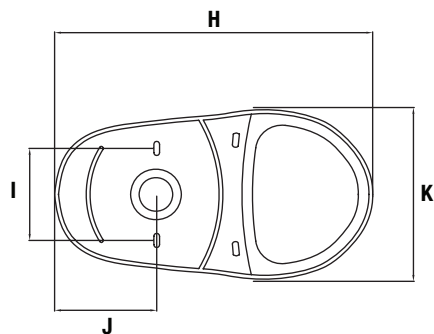

Footprint

	RF	EL	CH EL	ADA
	PF1400T	PF1401T	PF1402T	PF1403T
H	18-1/2"	18-1/2"	18-1/2"	18-1/2"
I	6"	6"	6"	6"
J	6-1/8"	6-1/2"	6-1/2"	6-1/2"
K	9"	9"	9"	9"

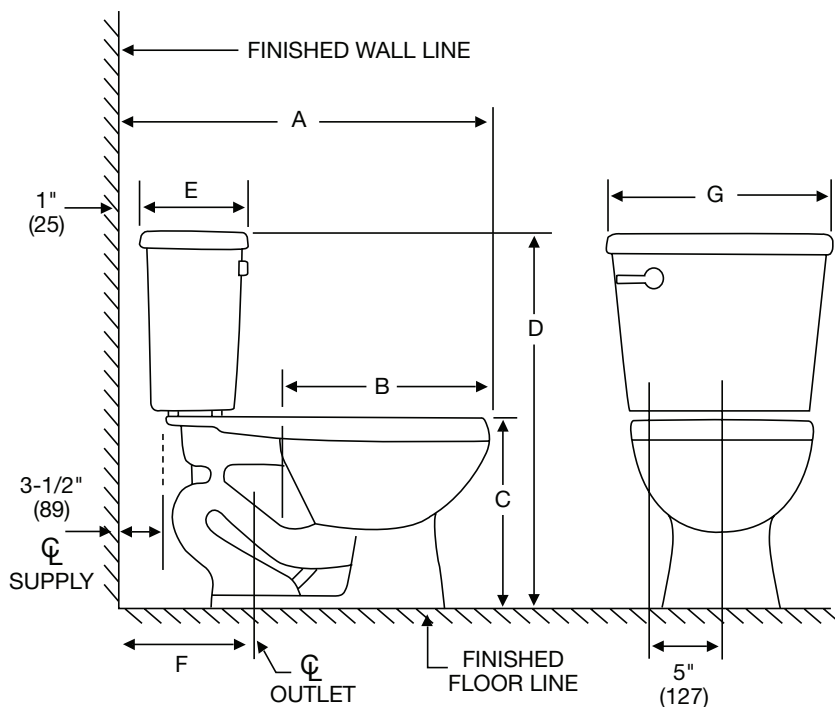

Warranty and Codes:

This product comes complete with installation, operating, care and maintenance instructions. All PROFLO fixtures carry a 1-year limited warranty. This product meets or exceeds ASME/ANSI A112.19.2M. In an effort to continually improve our products, we will make design changes from time to time. We reserve the right to ship newly designed product to fill any order unless we agree in writing to do otherwise.

