

Ceiling Fan

Type	
-09	
P2522 🗌	

Catalog No.	Finish Brushed Nickel				
		Dimensions (Inches)			
		Α	В	C	D
P2522	-09	52	19-1/8	15-7/1	611
Blades					
Side 1	Cherry				
Side 2	Natural Cherry				

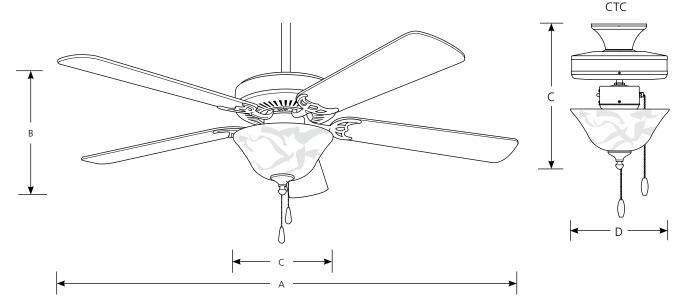



Fan mounted as close-to-ceiling.

Specifications:

General

• 30 year limited warranty

<u>Blades</u>

- Five blades
- 12 degree pitch
- Reversible
- MDF construction

Motor

- Triple capacitor speed control; manual reverse control
- 153mm dia x 14.5mm high

Light Kit

- Alabaster glass bowl
- Pull chain is chrome with a brushed nickel (-09) fob, white (-30W) has chrome chain

ENERGY INFORMATION AT HIGH SPEED

AIRFLOW: 4406 CFM cubic feet per minute

ELECTRICITY USE: 67 watts (excludes lights)

AIRFLOW EFFICIENCY: 66 cubic feet per minute per watt

with white fob.

• Utilizes (3) 40-watt candelabra based lamps, Included.

Mounting

- Dual ceiling mounting, use with downrod or install close-to-ceiling.
- A 3/4" x 4-1/4" downrod is included. Longer accessory downrods can be ordered separately
- Standard canopy designed for sloped ceilings up to 45 degrees (12:12 ceiling pitch)
- Canopy covers standard recessed 4" octagonal outlet box. Note: An outlet box assembly designed for fan installation is required (not included)
- Mounting hardware is included

Electrical

- 80" lead wires included
- Ceramic candelabra based sockets
- Prewired
- 190-watt limiter

Labeling

CUL listed

Progress Lighting 701 Millenium Blvd. Greenville, South Carolina 29607