

Specifications

PFMVTS38

3/8" THERMOSTATIC MIXING VALVE - SINGLE OUTLETS



Product Features

- Lead Free brass body to comply with Lead Free installation requirements
- Installs easily between the stop valves and faucet
- Temperature controls to ASSE 1070, down to 0.5 gpm
- Corrosion resistant internal components for extended life
- Includes tamper resistant handle to prevent accidental misadjustment
- Integral checks with screens prevents cross flow and filter out debris
- Factory set to 105°F (41°C)
- NSF-61 Compliant
- NSF372 Compliant





PFMVTS38

Model Numbers:

PFMVTS38

Optional Parts:

- OBPFK382014** Temperature Sensor Kit
- OBPFK325003** Check Valve Kit

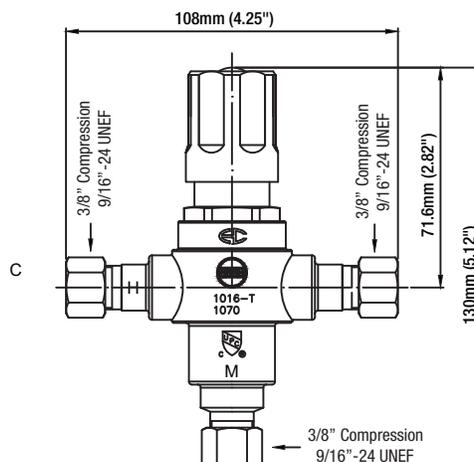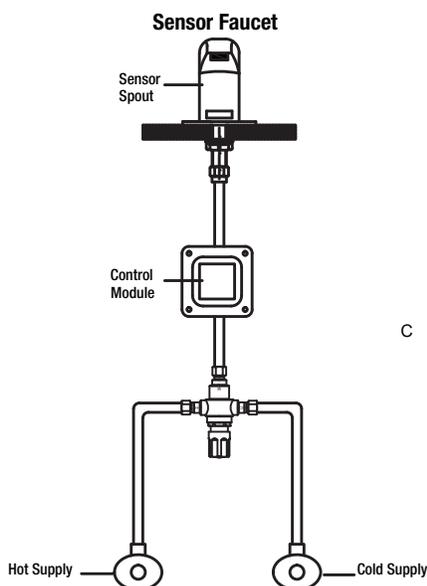

Specifications	
Temperature Adjustment Range	80 - 120°F (27 - 49°C)
Maximum Operating Pressure	200 psi (1379 kPa)
Hot Water Inlet Temperature Range	120 - 180°F (49 - 82°C)
Cold Water Inlet Temperature Range	40 - 80°F (4 - 27°C)
Minimum Flow	0.5 gpm (1.9 lpm)



Warranty and Codes

This product comes complete with installation, operating, care and maintenance instructions. This PROFLO faucet carries a limited lifetime warranty when installed in residential applications. The warranty is five years in commercial applications. This product meets ASME: A112.18.1. Compliant with lead content requirements of US Senate Bill S.3874



ASSE 1070
ASSE 1016-T