


Submitted Model No.: **Specific Features:** 

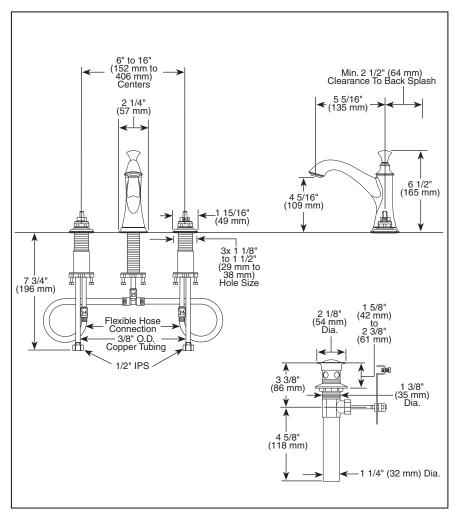

HX505▲ HL505 2 3/4' 2 3/4 G (70 mm)(70 mm)

▲ Designate Proper Finish Suffix

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.brizo.com for finish options and product availability.

# BRIZC WIDESPREAD LAVATORY **FAUCETS**

- Baliza<sup>®</sup> Bath Collection
- Two Handle Widespread Deck Mount
- 3 Hole Sink Applications
- 6" to 16" Centers

### **STANDARD SPECIFICATIONS:**

- Two handle lavatory faucet for concealed mounting on 3 hole applications.
- Widespread 6" (152mm) to 16" (406 mm) centers.
- 5 5/16" (135 mm) long, 6 1/2 (165 mm) high rigid spout.
- LHP Less Handle Program. See handle options below.
- Control mechanism shall be of the rotating ceramic cylinder type with 90° (1/4 turn) rotation.
- Metal drain with pop-up type fitting with plated flange and stopper.
- Accomodates up to 3" deck thickness.
- Maximum flow rate 1.5 gpm @ 60 PSI.


## WARRANTY

- Lifetime Faucet and Finish Limited Warranty to the original consumer purchase to be free from defects in material and workmanship.
- 5 Year Limited Warranty for usage in all industrial, commercial and business applications.



#### **COMPLIES WITH:**

- ASME A112.18.1 / CSA B125.1
- ASME A112.18.2/ CSA B125.2
- Indicates compliance to ICC/ANSI A117.1
- EPA WaterSense
- Verified compliant with .25%
- weighted average Pb content regulations.



#### **Delta Faucet Company**

55 E. 111th Street, Indianapolis, Indiana 46280 395 Matheson Blvd. E., Mississauga, ON L4Z 2H2 © 2010 Masco Corporation of Indiana