

# BRIZO®

## TUB AND SHOWER FAUCET TRIM

- Beauclere™ Bath Collection
- TempAssure® Thermostatic
- Valve Only (T60065)
- Shower Only (T60265)

### STANDARD SPECIFICATIONS:

- Max flow rate 1.75 gpm @ 80 psi, 6.6 L/min @ 550 kPa
- 4-spray settings: H<sub>2</sub>Okinetic® Rinsing Spray, Full Spray, Massage Spray and Pause. Pause is a non-positive shut-off
- Tub port maximum flow rate 8.6 gpm @ 60 psi with R60000-UNBX
- TempAssure® 60 series thermostatic valve cartridge
- Thermostatic wax element maintains the outlet temperature to ±3.6 °F
- Must also order MultiChoice® Universal rough valve body (R60000 Series)
- Back-to-back installation capability
- Lever volume control handle; temperature adjustment dial
- Graphics indicate hot/cold temperature adjustment
- Field adjustable to limit handle rotation into hot water zone
- All parts replaceable from the front of the valve
- Adjusts for up to 1" wall thickness


### WARRANTY

- Parts and Finish - Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date the product is received by the original purchaser or their authorized representative (installation contractor, etc.).
- Please go to [www.brizo.com](http://www.brizo.com) for the complete details of our limited warranty.




### COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- ASSE 1016 / ASME A112.1016 / CSA B125.16
- EPA WaterSense® - Applies to T60265 and 87465 only
- ICC/ANSI A117.1- Valve control only

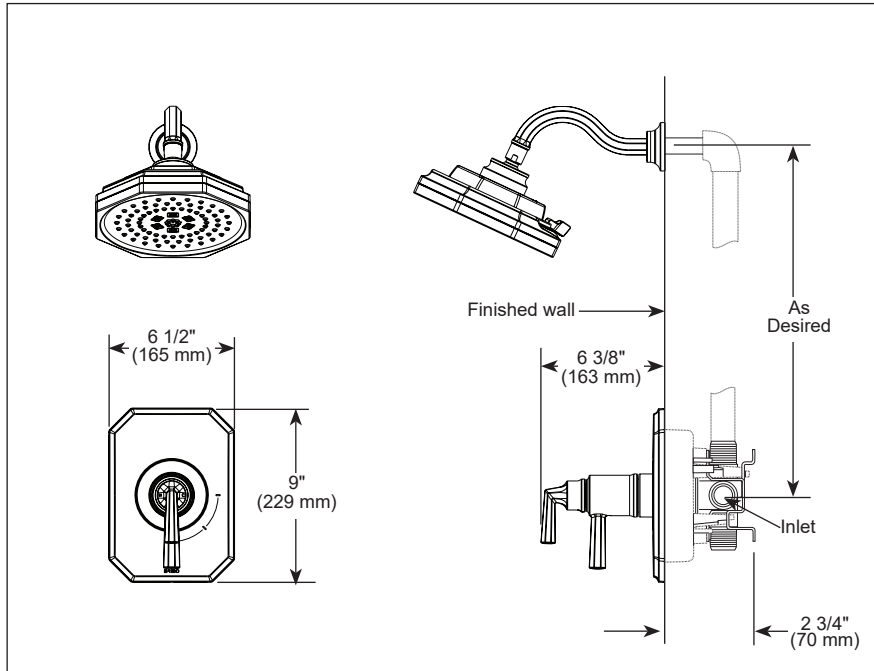


87465-▲ 1.75 GPM Shower Head



▲ Designate proper finish suffix

83865-▲ Shower Arm & Flange

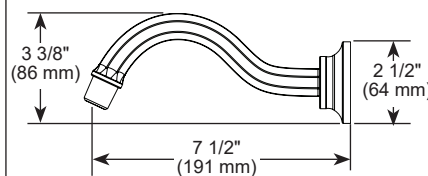

RP74785 Available Extension Kit

