


Electronic Faucets

Deckmount Electronic Gooseneck Faucet Hardware
Operated Surface Mount Control Box

Model No: 1500TF3370-R99

COMPLIES WITH:

- Complies to ASME A112.18.1/CSA B125.1
- EPA WaterSense® listed
- Verified compliant with 0.25% weighted average Pb content regulations
-  Indicates compliance to ICC / ANSI A117.1



NOTICE

- For optimum performance of this product, we recommend a system pressure between 20 and 80 PSI static. This product will operate up to a maximum of 125 PSI static per ANSI and CSA requirements. However, we do not recommend pressures above 80 PSI. Thermal expansion or leaking pressure reducing valves may require use of expansion tanks or relief valves to ensure your system never exceeds its maximum intended pressure setting.
- Designed for routine 171°F (77°C) disinfection cycles up to 30 minutes.
- Control Box(1500Txxx0) - Supplied as **COMPLETE PRODUCT ONLY**

(Contact Delta Representative for State and/or Local Approvals)

SPECIFICATION:


- **H2Optics®** technology no external adjustments required
- Chrome plated one piece cast main body with integral sensor
- Adjustable sensing range and timeout
- Mixing valve required (order separately)
- Serviceable filter screen upstream of the valve
- Optional 4" (102 mm) cover plate - **060546A**
- Optional 8" (203 mm) cover plate - **060547A**
- Deckmount Electronic Gooseneck Faucet, Hardwire Operated, Surface Mount Control Box
- Spout - R99 - Smooth End Gooseneck - 8.875" (225 mm) spout reach - 9.5" (241 mm) height (unmounted) - Standard rigid installation - Vandal resistant .090" (2 mm) wall thickness (R5SE)
- Outlet#: 7 - Smooth Spout End with Laminar Flow Control in Spout Base - 1.5 gpm (5.7L/min)
- Supplied as complete product only
- Surface mount housing
- Single Hole Deckmount **FIXED** Gooseneck Spout (R5) with Integral Sensor in Base

OPERATION:

- Hands free (touchless) operation.
- Water flows when sensor is activated.
- Water flow stops upon de-activation of sensor.
- Adjustable auto shut-off feature. Factory set to 45 seconds. Will reset once obstruction is removed.
- Adjustable sensing distance 3 to 15" (76 to 381mm). Factory set to 9" ±3.0" (229 mm ±76 mm).
- Periodic Rinse feature, time adjustable in 6 hour increments up to 2 days. Selectable rinsing lengths from 10 to 180 seconds. Factory set off.

(Dimensional drawing on following page)

Delta reserves the right (1) to make changes to specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. Measurement may vary plus or minus 0.25" (6 mm). Mounting locations are suggested only. Check with local codes for requirements in your area. This spec was produced November 2, 2023.

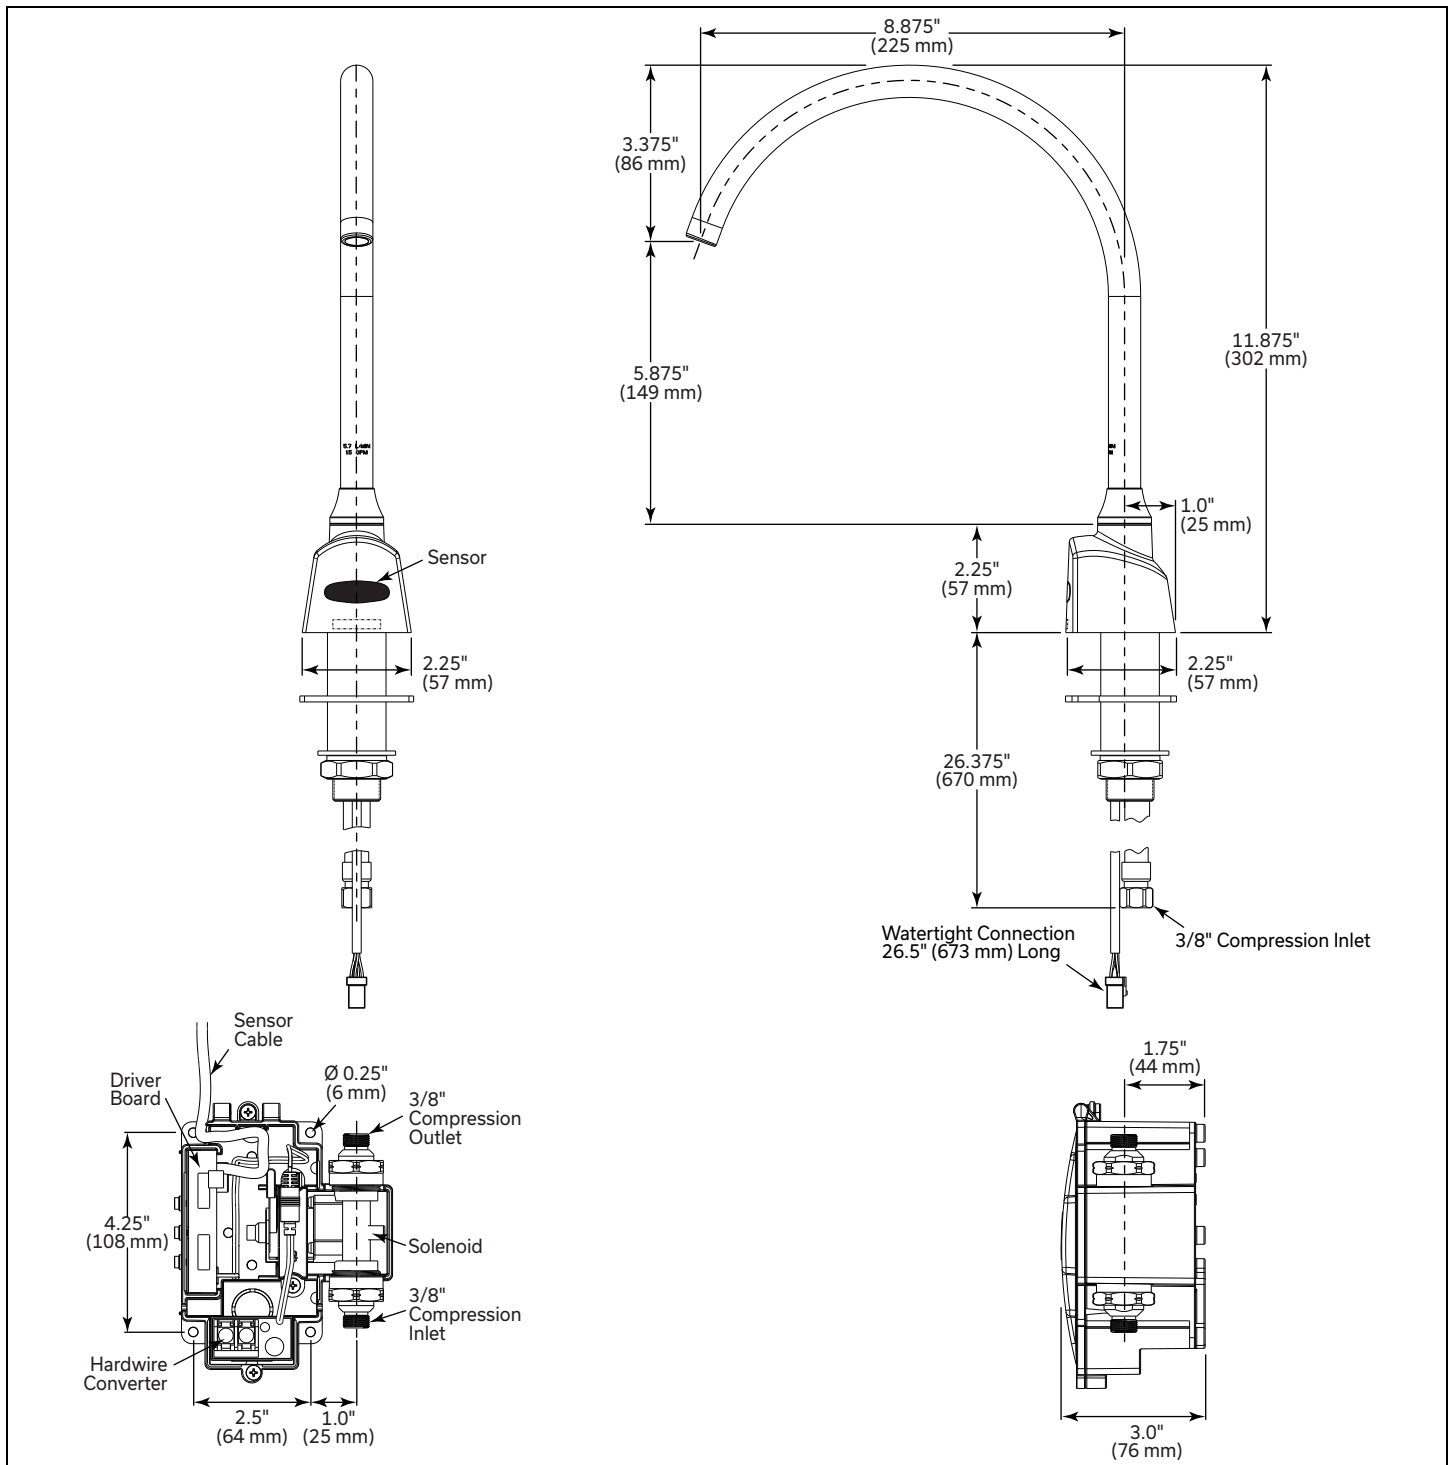

Delta reserves the right (1) to make changes to specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. Measurement may vary plus or minus 0.25" (6 mm). Mounting locations are suggested only. Check with local codes for requirements in your area. This spec was produced November 2, 2023.