



## Architectural Design Series Concealed Flush Valve - Rough-in

# 1800D60RI

### Description

Solenoid Valve, Stop - Filtered Bypass, Water Closet Fixture, Wall Hung & Floor Mounted, Rear Spud Connection with 1-1/2" Coupling, Front Accessible Rough-In Box, Integrated Control Stop, Delta Vacuum Breaker, Telescopic Flush Connection Tube

### Specifications

- Valve: Solenoid
- Bypass: Stop - Filtered
- Fixture Type: Water Closet
- Closet Mounting: Wall Hung and Floormounted Water Closet
- Fixture Connection: Rear Spud
- Spud Coupling: 1-1/2"
- Rough-In Box: Front Accessible
- Control Stop: Integrated
- Vacuum Breaker: Delta vacuum breaker
- Outlet Tube: Telescopic Flush Connection

### Features

- Recessed mounting box
- Heavy-duty solenoid operation valve, with repairable diaphragm kit
- ROUGH-IN MODELS - Supplied as flush valve, inlet stop and wall box
- Adjustable activation time for different volume
- Does not require a chase, can be installed in a 2x6 construction space

### Required Accessories

- **060704A** - Transformer 120 to 24 VAC Class 2 20 VA
- **060771A** - Transformer 120 to 24 VAC Class 2 40 VA



### Complies With

- ASSE 1037 ASME A112.1037/CSA B125.37

(Contact Delta Representative for State and/or Local Approvals)

### Valve Operating Pressure

- Recommend water supply
  - Minimum flowing pressure: 25 psi (172 kPa)
  - Minimum flow rate 25 gpm (95 L/min)

### Notes

- Trim ordered separately (Based on desired flush volume)

**NOTICE** Dimensions are for reference only. Measurements may vary  $\pm 0.25"$  (6 mm).

Max. flow rates are at 60 psi (414 kPa).


**WaterSense**® is a registered trademark of the U.S. Environmental Protection Agency.

Delta Faucet Company reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. See current full-line price book for finish options and product availability.

Masco Canada Limited  
350 South Edgeware Rd, St Thomas, Ontario, Canada N5P 4L1  
1-800-387-8277

**1800D60RI**

This spec was produced on May 28, 2024.

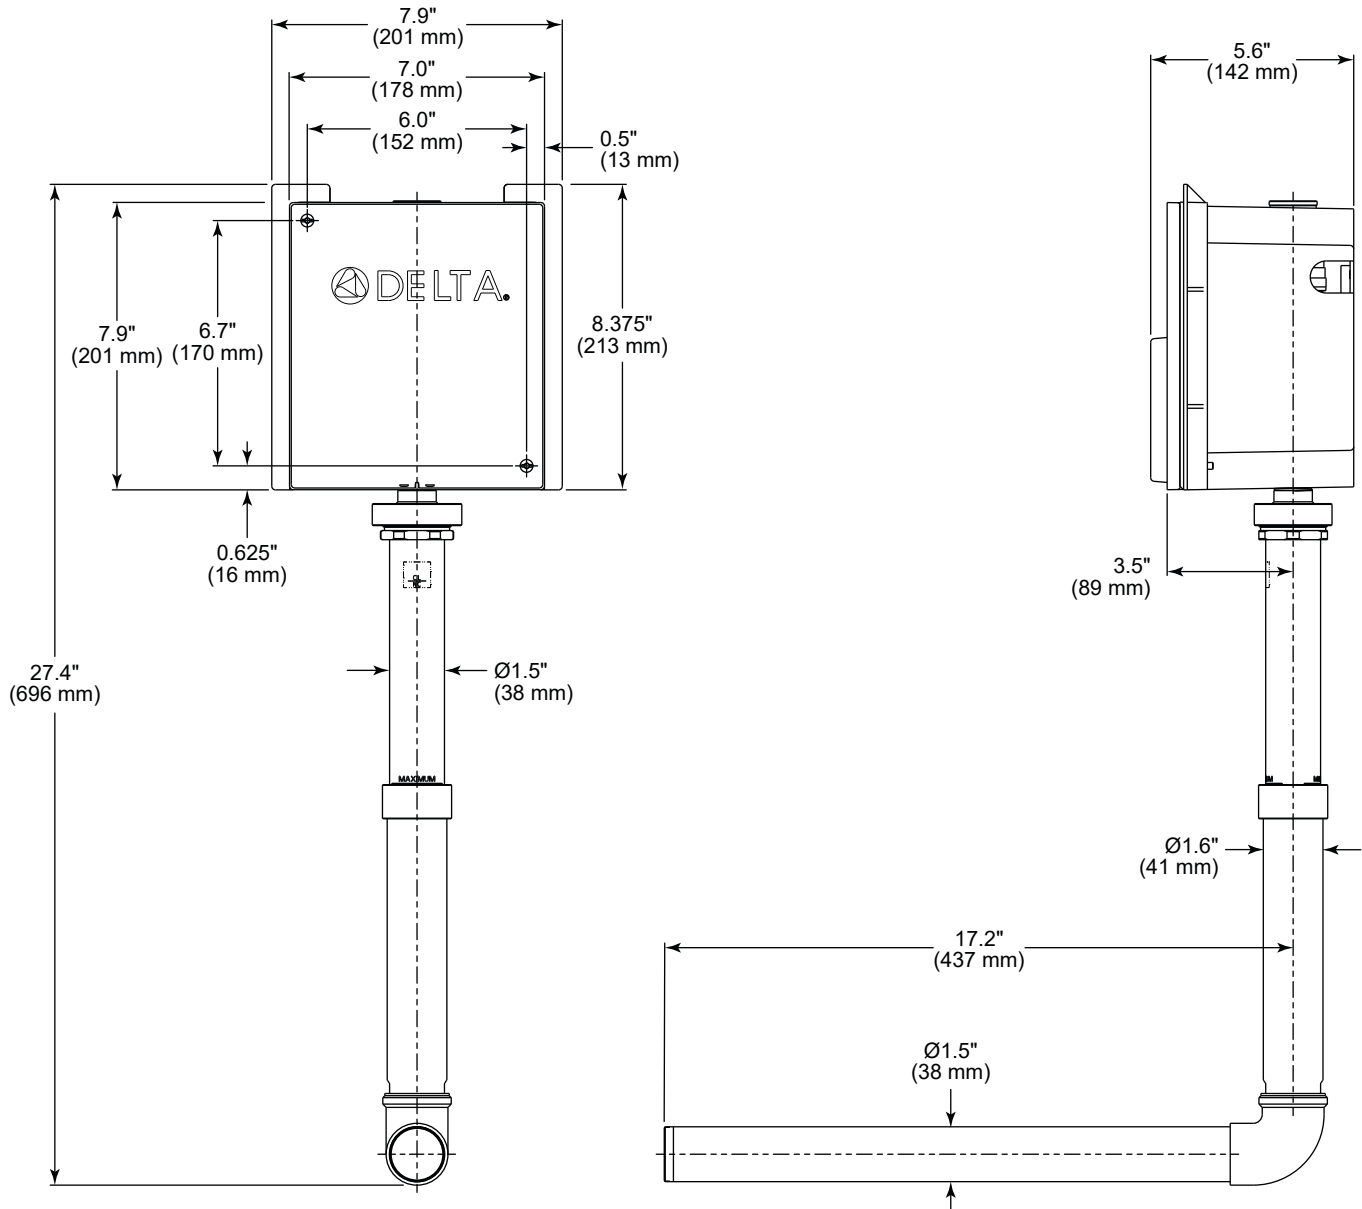

Delta Commercial flushometer valves are designed to operate at a supply pressure between 20 psi and 125 psi in accordance with ASSE 1037/ASME A112.1037/CSA B125.37. At high water pressures, splash out, noise or reduced life of plumbing components may be observed with a few models of water closet or urinal fixtures. To minimize, or eliminate these effects, select a different model of water closet or urinal fixture from the same or different manufacturer, or install a pressure reducing valve. If the installation does not allow for either of these options, the ball valve adjustment may be used to reduce peak flow to the valve.

**NOTICE** Dimensions are for reference only. Measurements may vary  $\pm 0.25"$  (6 mm).

Max. flow rates are at 60 psi (414 kPa).

**WaterSense**® is a registered trademark of the U.S. Environmental Protection Agency.

Delta Faucet Company reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. See current full-line price book for finish options and product availability.

Masco Canada Limited  
350 South Edgeware Rd, St Thomas, Ontario, Canada N5P 4L1  
1-800-387-8277

**1800D60RI**

This spec was produced on May 28, 2024.