


Submitted Model No.: Specific Features:

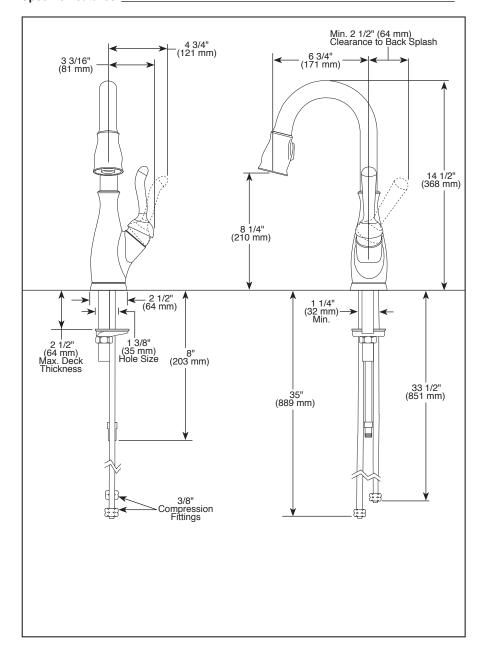

DELTA

BAR / PREP SINK **FAUCETS**

- Leland[®] Pull-Down Collection
- Single Handle Deck Mount
- 1 or 3 Hole Sink Applications
- DIAMOND Seal® Technology
- Integrated Supply Tubes
- 2-Function Pull-Down
- MagnaTite[®] Docking System

STANDARD SPECIFICATIONS:

- 14 1/2" (368 mm) high, 6 3/4" (171 mm) long, spout swings 360°.
- Control mechanism shall be the diamond coated ceramic cartridge.
- Lever handle. Control shall return to neutral position when faucet is turned off.
- Finished handle button with red/blue graphics to indicate hot/cold temperature.
- Integral double check valves in sprayer assembly.
- Disposable hose lead to aid installation.
- Recommended hole size 1 3/8" (35mm).
- 3/8" O.D. straight, staggered pex supply tubes -33 1/2" (851 mm) and 35" (889 mm) long.
- Touch-Clean® 2 function (stream spray) sprayhead.
- MagnaTite[™] docking system secures sprayer to spout.
- RP60734 wand assembly available with flow rate of 1.5 gpm max. @ 60 PSI.
- RP47274 escutcheon available for 3 hole sinks.

WARRANTY

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes: or, for commercial users, for 5 years from date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or, for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.








COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1ASME A112.18.6

Indicates compliance to ICC/ANSI A117.1

Verified compliant with .25% weighted average Pb content regulations.





55 E. 111th Street, Indianapolis, Indiana 46280 350 South Edgeware Road, St. Thomas, ON N5P 4L1 © 2014 Masco Corporation of Indiana