


58651-▲  
58651-▲25  
58651-▲PR  
58651-▲PR25

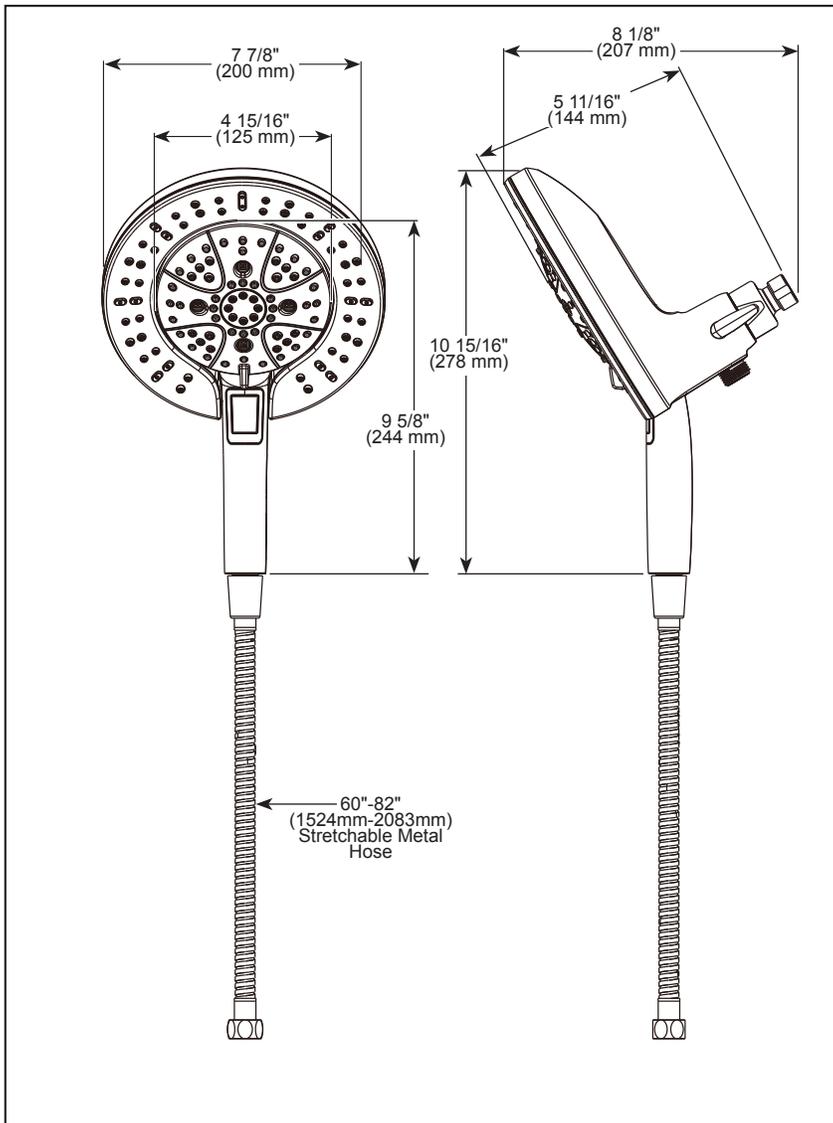

▲ Designate proper finish suffix

- ◆ Your Delta Faucet hand shower incorporates a backflow protection system that has been tested to be in compliance with ASME A112.18.3 and ASME A112.18.1/CSA B125.1. It incorporates two certified check valves in series, which operate independently and are integral, non-serviceable parts of the wand assembly.

Delta Faucet Company reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or [www.deltafaucet.com](http://www.deltafaucet.com) for finish options and product availability.

DSP-B-58651 Rev. A



see what Delta can do™

**IN2ITION®**

- H2Okinetic® 2-In-1 Shower
- 7-Spray Setting Hand Shower

**FEATURES:**

- Touch-Clean® Nozzles
- MagnaTite® Docking
- ProClean™ Spray Setting
- H<sub>2</sub>Okinetic Technology® Hand Shower
- Certified Dual Check Valves
- Lumicoat™ Finish (-PR models only)
- Lumicoat™ Finishes easily wipe clean without cleaners and chemicals on the products most commonly touched areas

**STANDARD SPECIFICATIONS:**

- Max flow rate 1.75 gpm at 80 psi, 6.6 L/min @ 550 kPa (For 58651-▲, 58651-▲PR)
- Max flow rate 2.5 gpm at 80 psi, 9.5 L/min @ 550 kPa (For 58651-▲25, 58651-▲PR25)
- Integrated hand shower docks securely into shower head when not in use
- 3-Way diverter allows for single or shared operation of shower head and hand shower
- Change hand shower spray modes with easy turn dial
- Pause hand shower flow with push button pause in handle – pause is a non-positive shut-off
- Multiple hand shower spray settings
- Spray settings include: full body spray, massaging spray, shampoo rinsing spray, Shampoo with massage spray, H<sub>2</sub>Okinetic® PowerDrench® spray, pause & ProClean™ spray
- 60"-82" (1524mm-2083mm) stretchable metal hose
- Ball connector swivel angle is 39° (19.5° per side)
- Fits standard 1/2"-14 NPT pipe fitting
- Lumicoat™ is not applied to the shower hose

**WARRANTY**

- Parts and Finish - Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date the product is received by the original purchaser or their authorized representative (installation contractor, etc.).
- Electronic Parts and Batteries (if applicable) - 5 years from the date the product is received by the original purchaser or their authorized representative (installation contractor, etc.); or for commercial purchasers, 1 year from the date the product is received by the original purchaser or their authorized representative (installation contractor, etc.). No warranty is provided on batteries.
- Please go to [www.deltafaucet.com](http://www.deltafaucet.com) for the complete details of our limited warranty.



**COMPLIES WITH:**

- ASME A112.18.1 / CSA B125.1◆
- ASME A112.18.3◆
- EPA WaterSense® - Applies to 58651-▲ & 58651-▲PR only

**Delta Faucet Company**

55 E. 111th Street, Carmel, IN 46280  
350 South Edgeware Road, St. Thomas, ON N5P 4L1  
© 2024 Delta Faucet Company