


▲ Designate proper finish suffix



Delta Faucet Company reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.deltafaucet.com for finish options and product availability.

DSP-B-74B430 Rev. A

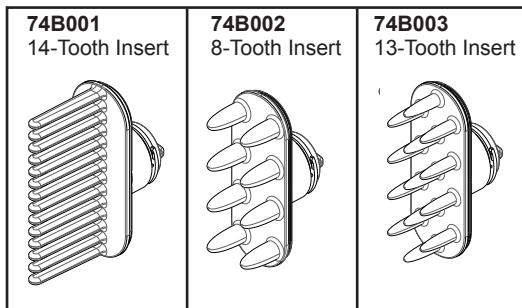

see what Delta can do™

VERSACURL™ DETANGLING SHOWER TOOL

- 3-Spray Setting Hand Shower
- 2-Way Diverter

STANDARD SPECIFICATIONS:

- Hand Shower Max flow rate 1.75 gpm at 80 psi, 6.6 L/min @ 550 kPa
- Certified dual check valves for backflow protection
- 2-Way diverter allows for shower head only and hand shower only
- Change spray modes with pushbutton
- 3 setting hand shower, featuring 2 spray settings and pause - a non positive shut-off
- Includes 3 interchangeable hair care inserts
- 72" (1829 mm) metal hose
- Additional Docking Mount for Hand Shower can swivel 35° forward to 5° backward.
- Fits standard 1/2"-14 NPT pipe fitting

WARRANTY

- Beauty and Hair Care Plumbing Components and Finishes - Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date the product is received by the original purchaser or their authorized representative (installation contractor, etc.).
- Beauty and Hair Care Consumable Parts [including hair care inserts] - One (1) year from the date that the product is received by the original consumer purchaser or their authorized representative (installation contractor, etc.), or, for commercial purchasers, for one (1) year from the date that the product is received by the original commercial purchaser or their authorized representative (installation contractor, etc.).
- Please go to www.deltafaucet.com for the complete details of our limited warranty.



COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1♦
- ASME A112.18.3
- EPA WaterSense®

♦Your Delta hand shower incorporates a backflow protection system that has been tested to be in compliance with ASME A112.18.3 and ASME A112.18.1 / CSA B125.1. It incorporates two certified check valves in series, which operate independently and are integral, non-serviceable parts of the wand assembly.

Delta Faucet Company

55 E. 111th Street, Carmel, IN 46280
350 South Edgeware Road, St. Thomas, ON N5P 4L1
© 2025 Delta Faucet Company