

DELTA®

see what Delta can do™

## IN2ITION®

- 2-In-1 Shower
- 4-Spray Setting Hand Shower
- Additional Docking Mount for Hand Shower

### FEATURES:


- Touch-Clean® Spray Holes

### STANDARD SPECIFICATIONS:

- Max flow rate 1.75 gpm at 80 psi, 6.6 L/min @ 550 kPa
- Shower with four spray settings - pause is a non-positive shut-off
- Integrated hand shower docks securely into shower head when not in use
- 3-Way diverter allows for single or shared operation of shower head and hand shower
- 60" (1524mm) stainless steel hose (Chrome, SN finishes)
- 60" (1524mm) UltraFlex® hose (RB, BL finishes)
- Ball connector swivel angle is 22° (11° per side)
- Additional docking mount for hand shower can swivel 35° forward to 5° backward
- 4 Spray settings include: Full spray, Full spray with Massage, Massage spray and Pause

### WARRANTY:

- Parts and Finish – Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date the product is received by the original purchaser or their authorized representative (installation contractor, etc.).
- Please go to [www.deltafaucet.com](http://www.deltafaucet.com) for the complete details of our limited warranty.

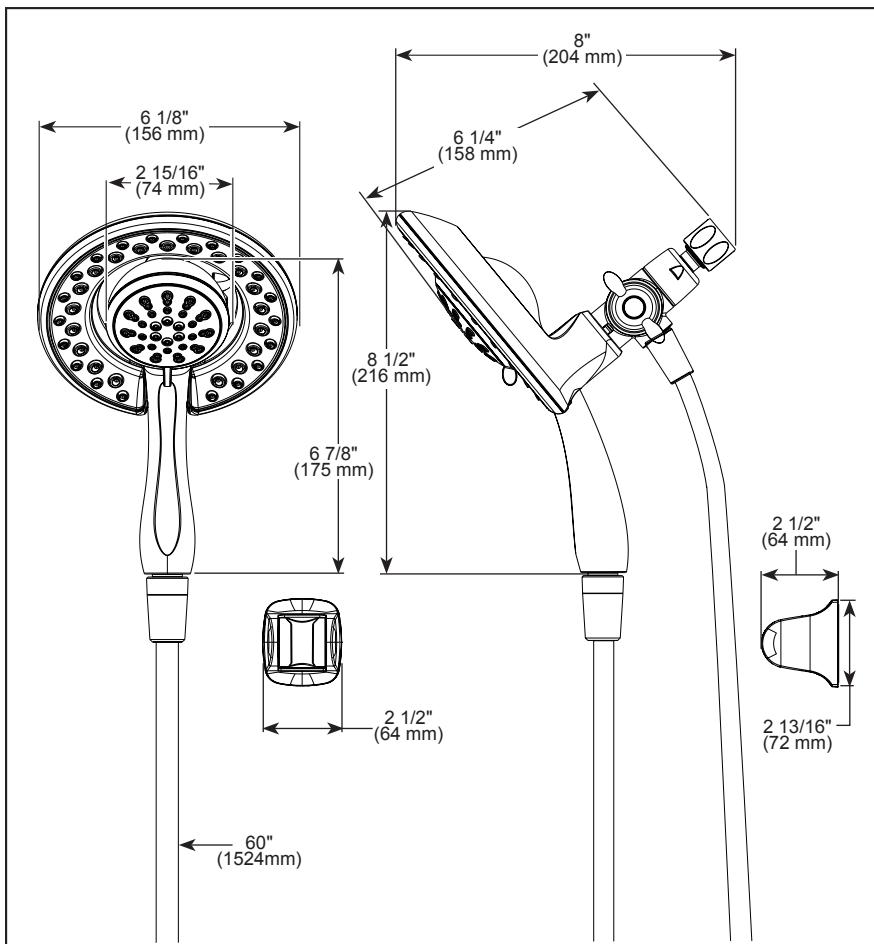

▲ Designate proper finish suffix

**RP101859▲**  
Additional Docking Mount  
for Hand Shower



Delta Faucet Company reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or [www.deltafaucet.com](http://www.deltafaucet.com) for finish options and product availability.

DSP-B-75498 Rev. B

### COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- EPA WaterSense®

### Delta Faucet Company

55 E. 111th Street, Carmel, IN 46280  
350 South Edgeware Road, St. Thomas, ON N5P 4L1  
© 2025 Delta Faucet Company