




see what Delta can do™

TUB AND SHOWER FAUCET TRIM

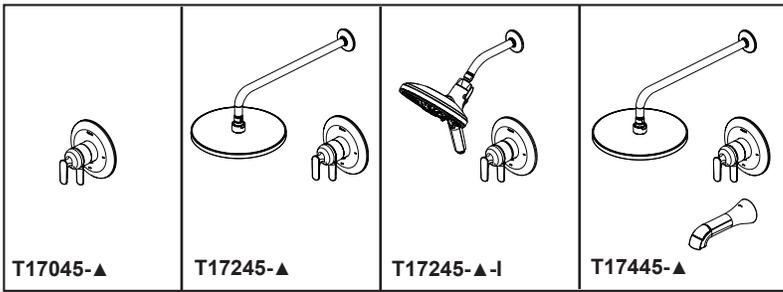

- Bonacci™ Bath Collection
- Valve Only (T17045 Series)
- Shower Only (T17245 Series)
- Tub/Shower (T17445 Series)

FEATURES:

- Monitor® 17 Series pressure balanced bath mixing valve trim
- 10" single-function full spray shower head for models without -I suffix
- 7-setting In2ition® shower with H2Okinetic® PowerDrench® spray and ProClean™ hand shower for model with -I suffix
- Lumicoat® Finish (-PR models only)
- Lumicoat® Finishes easily wipe clean without cleaners and chemicals on the products most commonly touched areas

STANDARD SPECIFICATIONS:

- Maintains a balanced pressure of hot and cold water even when a valve is turned on or off elsewhere in the system
- For use with MultiChoice® Universal rough valve body (R10000 Series)
- Back-to-back installation capability
- Solid brass forged body
- Lever volume control handle; temperature adjustment dial
- Field adjustable to limit handle rotation into hot water zone
- Maximum dial rotation adjustable between 90° and 180°
- All parts replaceable from the front of the valve
- Max flow rate 1.75 gpm @ 80 psi, 6.6 L/min @ 550 kPa
- Tub port maximum flow rate 6.2 gpm @ 60 psi with R10000-UNBX
- Shower arm overall horizontal length = 16" (406 mm), including threaded ends. 7" (178 mm) for model with -I suffix
- Stem extension kit RP77992 can be ordered to allow for an additional 1 3/4" wall thickness. RP77992 ships with chrome escutcheon screws. For special finishes also order RP12630 escutcheon screws in desired finish.
- Universal spout adapter included allows for thread, sweat or slip-on installation

WARRANTY

- Parts and Finish - Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date the product is received by the original purchaser or their authorized representative (installation contractor, etc.).
- Please go to www.deltafaucet.com for the complete details of our limited warranty.




COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- ASSE 1016 / ASME A112.1016 / CSA B125.16
- EPA WaterSense® - Applies to T17245, T17245-I, T17445, 58651, & RP103694 only
- ♿ ICC/ANSI A117.1 - Valve control only

Delta Faucet Company

55 E. 111th Street, Carmel, Indiana 46280
350 South Edgeware Road, St. Thomas, ON N5P 4L1
© 2025 Delta Faucet Company

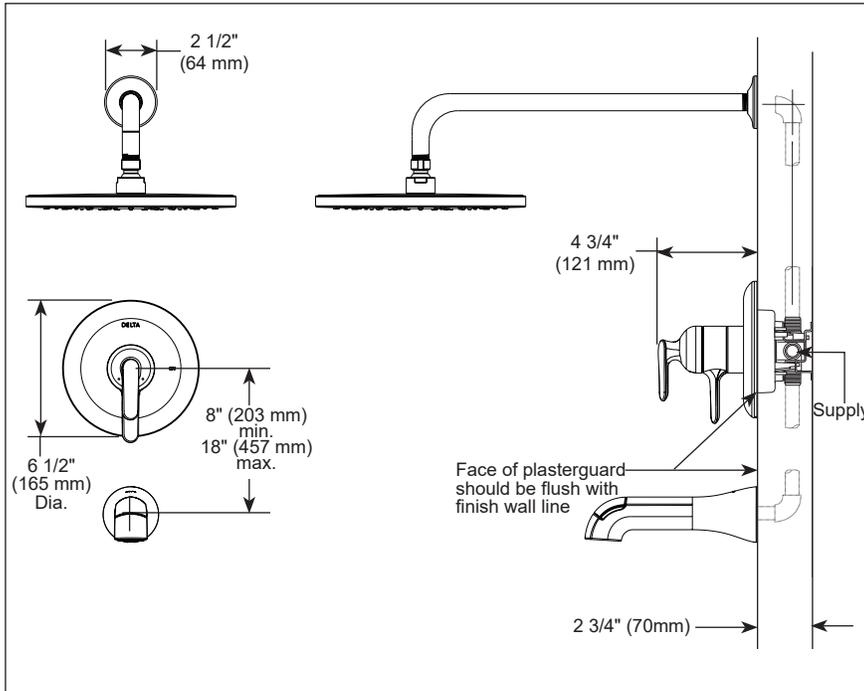

RP103694▲ 1.75 GPM
Single Setting Shower Head

RP104077▲ (Diverter)

58651-▲ 1.75 GPM
7-Setting In2ition® Shower Head w/ProClean™

RP104078▲ (Non-Diverter)

RP77992 Available Extension Kit

▲ Designate Proper Finish Suffix