

see what Delta can do™

ROMAN TUB/WHIRLPOOL FAUCET TRIM

- Altado™ Bath Collection
- Three Hole Installation (T2742 Series)
- Four Hole Installation (T4742 Series)

STANDARD SPECIFICATIONS:

- Hand shower max flow rate of 1.75 gpm @ 80 psi, 6.6 L/min @ 550 kPa
- Trim only for two handle Roman Tub faucet for concealed mounting
- Temperature and volume controlled with handles
- Optional red/blue indicator rings provided
- Rough-In kit must also be ordered to complete installation
 - R2700 or R2707 for three hole
 - R4707 for four hole
- There are separate specification sheets on each rough-in kit if more details are required
- Hand shower includes double check valves for backflow prevention (T4742)


WARRANTY

- Parts and Finish - Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date the product is received by the original purchaser or their authorized representative (installation contractor, etc.).
- Please go to www.deltafaucet.com for the complete details of our limited warranty.



COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- EPA WaterSense® - Applies to T4742-▲ only
- ♿ ICC/ANSI A117.1 - Valve control only

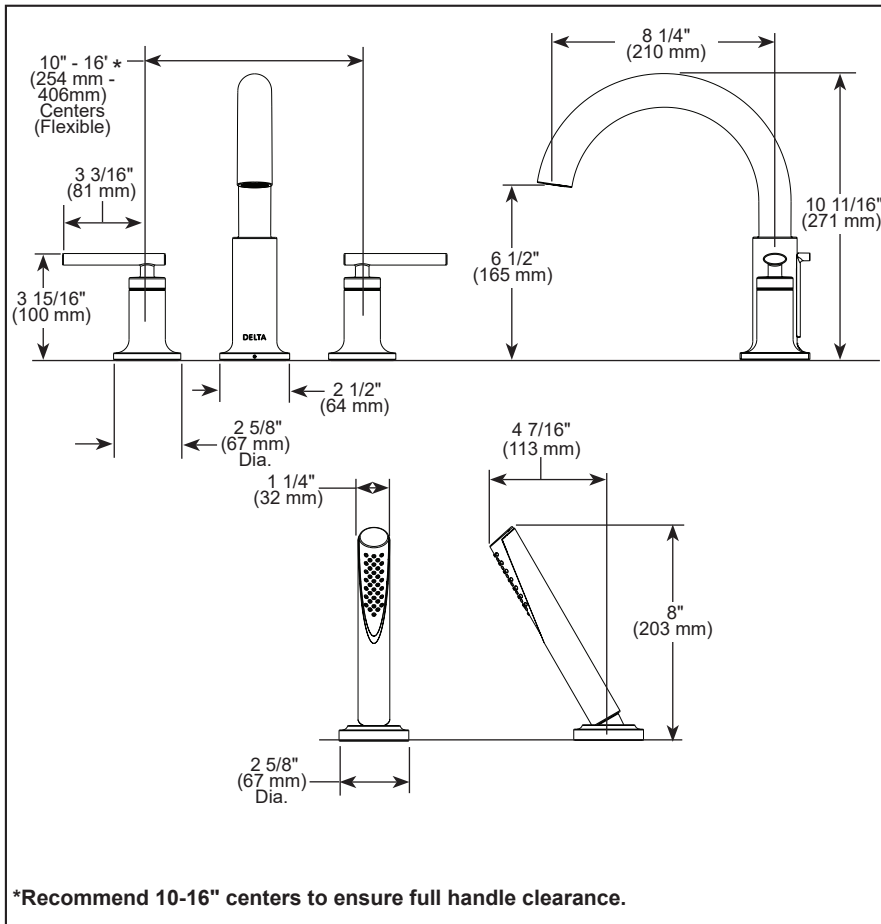

▲ Designate Proper Finish Suffix