


ME by Starck Toilet wall-mounted Duravit Rimless for SensoWash® f # 251009..92

| < 14 3/4" Inch > |

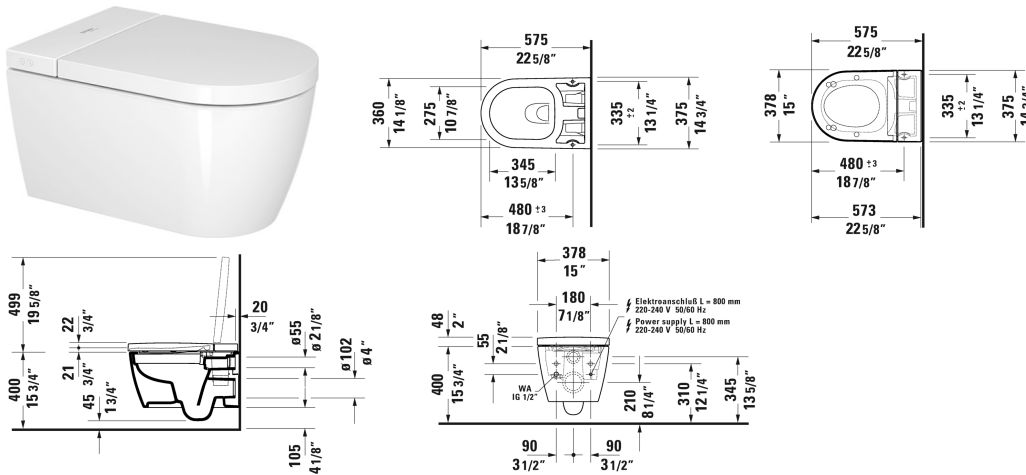

| Toilet wall-mounted Duravit Rimless for SensoWash® f | Dimension | Weight | Order number |
|--|------------------------|---------|--------------|
| rimless, washdown model, only in combination with SensoWash f | | | |
| Colors | | | |
| Variant | | | |
| | 14 3/4" x 22 5/8" Inch | 55.1 lb | 251009..92 |
| Infobox | | | |
| Choose suitable pre-installation kit or connecting set depending on in-wall carrier selection, Wall-mounted toilet is ADA compliant, when installed with a seat height of 17" - 19" from the finished floor, If 2x6" carrier is used, # 005072 is mandatory for SensoWash® installation during rough-in stage, Not available with WonderGliss, In-wall tank & carrier and actuator plate required for installation / Refer to page XXX | | | |
| Hardware for wall-mounted bidet and wall-mounted toilet | Ø 1/2" x 7 1/8" Inch | 0.4 lb | 006500 |
| Noise reduction gasket for wall-mounted toilet | | 0.7 lb | 005064 |
| Pre-installation set in combination with SensoWash, for in-wall carrier with horizontal support without shower toilet pre-installation/conduit pipe | | | 005072 |
| Connecting set in combination with SensoWash Starck f | | | 100731 |
| Suitable products | | | |

**ME by Starck Toilet wall-mounted Duravit Rimless for
SensoWash® f # 251009..92**

| < 14 3/4" Inch > |

| | |
|---|--------|
| <p>SensoWash® Starck f Plus shower toilet-seat Rear-, Lady- and Comfortwash, heated seat, warm air dryer, individual adjustment of water-, air- and seat surface temperature as well as nozzle position and jet strength, night light, Intelligent energy-saving mode, remote control included, app operation, self-cleaning wand, descaling function, automatic drainage in periods of prolonged disuse, 14 7/8" x 22 5/8" Inch</p> | 612000 |
| <p>SensoWash® Starck f Lite shower-toilet seat Rear-, Lady- and Comfortwash, heated seat, Intelligent energy-saving mode, warm air dryer, individual adjustment of water-, air- and seat surface temperature as well as nozzle position and jet strength, automatic drainage in periods of prolonged disuse, descaling function, night light, remote control included, app operation, self-cleaning wand, seat/lid material thermoplastic, 14 7/8" x 22 5/8" Inch</p> | 612001 |

All drawings contain the necessary measurements which are subject to standard tolerances. They are stated in inch & mm and are non-binding. Exact measurements, in particular for customized installation scenarios, can only be taken from the finished ceramic piece.