


# Assembly Instructions For **F2248/3** (E) 10/07

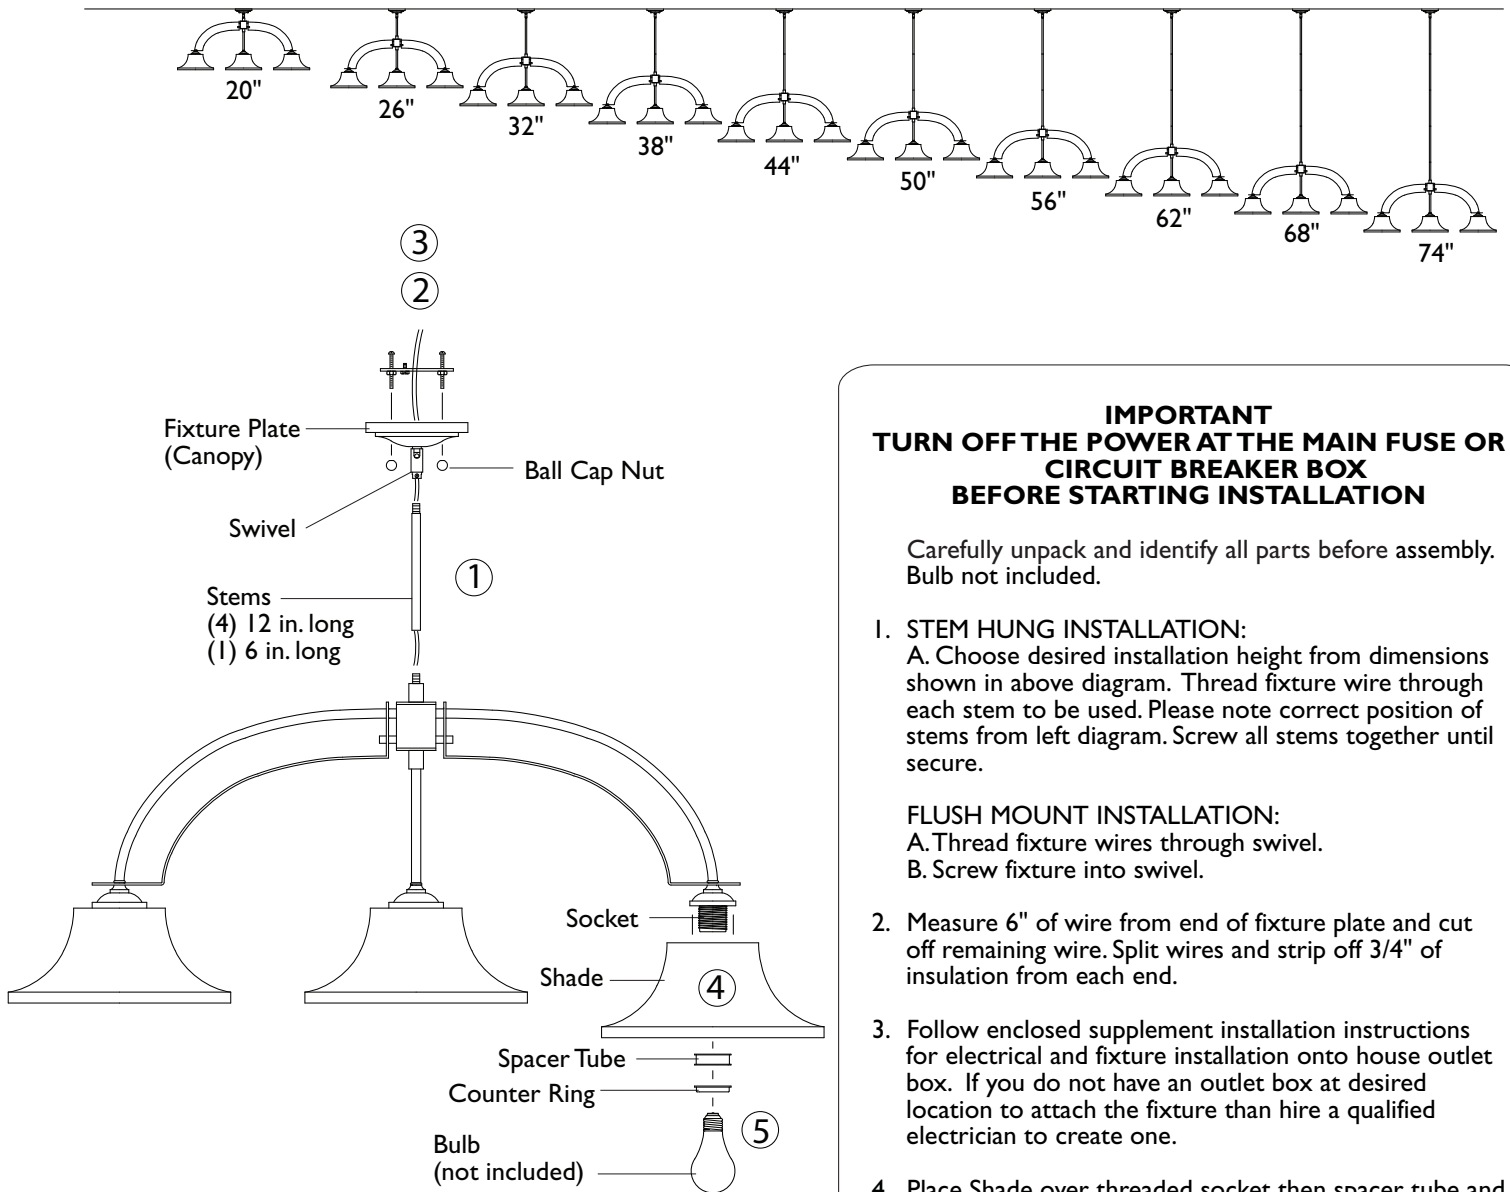

## **IMPORTANT** **TURN OFF THE POWER AT THE MAIN FUSE OR** **CIRCUIT BREAKER BOX** **BEFORE STARTING INSTALLATION**

Carefully unpack and identify all parts before assembly. Bulb not included.

### 1. STEM HUNG INSTALLATION:

A. Choose desired installation height from dimensions shown in above diagram. Thread fixture wire through each stem to be used. Please note correct position of stems from left diagram. Screw all stems together until secure.

### FLUSH MOUNT INSTALLATION:


A. Thread fixture wires through swivel.  
B. Screw fixture into swivel.

2. Measure 6" of wire from end of fixture plate and cut off remaining wire. Split wires and strip off 3/4" of insulation from each end.

3. Follow enclosed supplement installation instructions for electrical and fixture installation onto house outlet box. If you do not have an outlet box at desired location to attach the fixture than hire a qualified electrician to create one.

4. Place Shade over threaded socket then spacer tube and secure with counter ring.

5. Install light bulbs (not included). See label located at socket area for type and maximum allowed wattage.



**MURRAY**  
**F E I S S**

Generation Brands™