GEBERIT TYPE 10 REMOTE BUTTON ACTUATORS
For Sigma and Omega Concealed Tanks, 2x6 and 2x4 installations

SPECIFICATIONS

Actuators for concealed tank and carrier system. Remote push buttons shall be molded plastic and plated to guard against scratches. All components shall be compliant with applicable codes and product standards.

FEATURES

• Designed to maintain appearance push after push
• Incorporates water saving possibilities when used with Geberit dual-flush tanks 1.6 GPF (6 LPF) and 0.8 GPF (3 LPF) or 1.28 GPF (4.8 LPF) and 0.8 GPF (3 LPF)
• Available in a variety of colors and materials
• All can be placed anywhere within a 5.5 ft. radius of the concealed tank
• For furniture as well as solid and drywall construction
• Pneumatic remote flush
• Moving parts are accessible behind cover plate
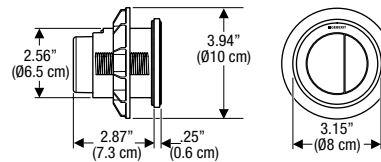• Includes mounting hardware

WARRANTY

• One-year limited warranty

DIMENSIONS

Type 10 Dual-Flush, Concealed Installation

2.56" (Ø6.5 cm)
2.87" (7.3 cm)
.25" (0.6 cm)
3.7" (Ø9.4 cm)
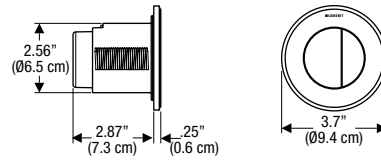
Type 10 Dual-Flush, Furniture Installation

2.56" (Ø6.5 cm)
3.94" (Ø10 cm)
2.87" (7.3 cm)
.25" (0.6 cm)
3.15" (Ø8 cm)

Sigma Cover Plate for use with flush buttons

Standard:

9.7" (24.6 cm)
6.5" (16.4 cm)
.5" (1.27 cm)

Customizable for surface-even install:

8.4" (21.3 cm)
5.2" (13.1 cm)
0.16 - 0.8" (0.4 - 2 cm)*

Omega Cover Plate for use with flush buttons

Standard:

8.3" (21.2 cm)
5.6" (14.2 cm)
.39" (1 cm)

Customizable for surface-even install:

7.2" (18.3 cm)
4.4" (11.3 cm)
0.16 - 0.8" (0.4 - 2 cm)*

*NOTE: Customizable surface-even cover plate accepts typical wallcovering materials to disguise the service opening. Minimum finished wall is ≥3/4" (1.8 cm) plus cover thickness up to a maximum of 2" (5 cm) total.

Products marked with ♿ comply with the American Disabilities Act (ADA) when installed per the requirements of the latest ADA Accessibility Guidelines (ADAAG) and/or ICC/ANSI A117.1.

KNOW HOW INSTALLED

ARCHITECT/ENGINEER APPROVAL

Job Name:

Date: Quantity:

Model Specified:

Variations Specified:

Customer/Wholesaler:

Contractor:

Architect:

GEBERIT TYPE 10 REMOTE BUTTON ACTUATORS
For Sigma and Omega Concealed Tanks, 2x6 and 2x4 installations

Dual-Flush Remote Button Actuators for Concealed Installations

Style	Material	Finish	Installation System		
			Sigma 2x6	Sigma 2x4	Omega 2x6
Type 10	Plastic	Matte Chrome-Polished Chrome**	116.055.KH.1	116.056.KH.1	116.055.KH.1
		Polished Chrome-White**	116.055.KJ.1	116.056.KJ.1	116.055.KJ.1
		Polished Chrome-Black** *NEW!*	116.055.KM.1	116.056.KM.1	116.055.KM.1

### Dual-Flush Remote Button Actuators for Furniture Installations

Style	Material	Finish	Sigma 2x6	Sigma 2x4	Omega 2x6
Type 10	Plastic	Matte Chrome-Polished Chrome**	116.057.KH.1	—	116.057.KH.1
		Polished Chrome-White**	116.057.KJ.1	—	116.057.KJ.1

** Finishes follow this pattern = Frame-Button

Cover Plates for use with flush buttons

Style	Material	Finish	Installation System		
			Sigma 2x6	Sigma 2x4	Omega 2x6
	Glass	White	115.766.SI.1	115.766.SI.1	115.082.SI.1
	Stainless	Brushed Stainless Steel Vandal Resistant	115.764.FW.1	115.764.FW.1	—
		Customizable	115.766.00.1	115.766.00.1	115.082.00.1
	Plastic	Alpine White	115.768.11.1	115.768.11.1	—
		Polished Chrome	115.768.21.1	115.768.21.1	—
		Matte Chrome	115.768.46.1	115.768.46.1	—

Surface Even Cover Plates for use with flush buttons[†]

Style	Material	Finish	Sigma 2x6	Sigma 2x4	Omega 2x6
	Plastic	Customizable + rough-in kit	115.696.00.1 + 243.168.00.1	115.696.00.1	115.087.00.1
		Customizable with frame + rough-in kit	115.697.00.1 + 243.168.00.1	115.697.00.1	115.088.00.1

† For tile, stone or other hard surface walls only