


33 885 3-hole Wall-mount Rough-in Valve

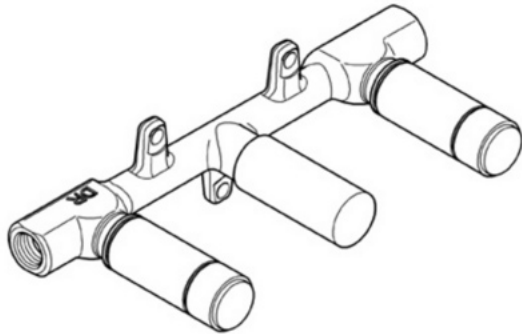

Description

3-hole wall-mount installation
Cast brass construction
8"-on-center rough valve
1/4 turn GROHE SilkMove® ceramic cartridges

Rough-valve only. Requires 3-hole vessel faucet trim.

Flow Rate

2.2 gpm at 60 psi,
2.5 gpm at 80 psi

Code Compliance

ASME/ANSI A112.18.1M
ANSI/NSF Standard 61

Finish Options

33 885 000 Rough-In

