



Start Here

Drawing 1 - Fixture Mounting

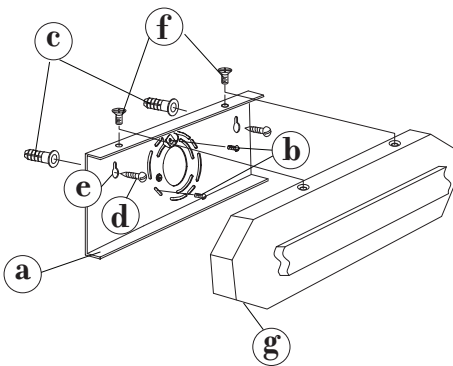

Drawing 2 - Fixture Assembly

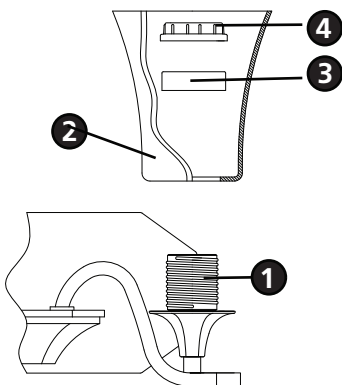

1

1. Find a clear area in which you can work.
2. Unpack fixture and glass from carton.
3. Carefully review instructions prior to assembly.

***** The construction of this fixture will be accomplished by first attaching the mounting strap to the junction box, making all necessary electrical connections, assembling the main body of the fixture, mounting the fixture to the wall, and then installing the glass.**

2

1. Remove mounting screws (f) from backplate (g) - See Drawing 1.
2. Remove retainer plate (a) from inside of backplate (g).
3. Attach retainer plate (a) to junction box using 2 screws (b).
Additional support can be provided for the retainer (a) plate by installing the plastic wall anchors (c) and the wood screws (d) in the keyhole slots (e).
5. Make electrical connections from supply wires to the fixture lead wires. Refer to instruction sheet (IS-18) and follow all instructions to make all necessary wiring connections.
6. To mount fixture, slip the backplate (g) over retainer plate (a) and thread screws (f) into top and bottom of backplate (g) to secure fixture to wall - See Drawing 1.

SAFETY WARNING: READ WIRING AND GROUNDING INSTRUCTIONS (I.S. 18) AND ANY ADDITIONAL DIRECTIONS. TURN POWER SUPPLY OFF DURING INSTALLATION. IF NEW WIRING IS REQUIRED, CONSULT A QUALIFIED ELECTRICIAN OR LOCAL AUTHORITIES FOR CODE REQUIREMENTS.

3

Make electrical connections from supply wire to fixture lead wires. Refer to instruction sheet (I.S. 18) and follow all instructions to make all necessary wiring connections. Then refer back to this sheet to continue installation of this fixture.

4

1. Mount the fixture by sliding the back plate (B) over mounting plate (A)- see Drawing 1
2. Attach the back plate (B) to mounting plate (A) with screws (C).

5

1. To install glass remove the spacer (3) and socket ring (4) from the socket (1) - see Drawing 2.
2. Place glass (2) over the socket (1).
3. Slip spacer (3) and thread socket ring (4) back on to socket (1) and hand tighten.
Note: Over tightening could cause damage to glass.
4. Fixture can now be lamped accordingly.