
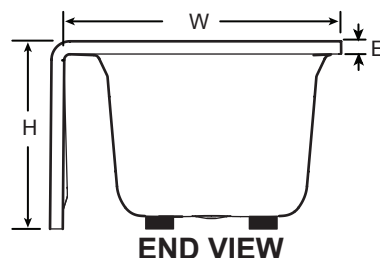
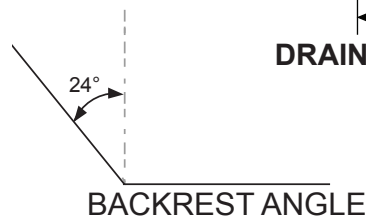

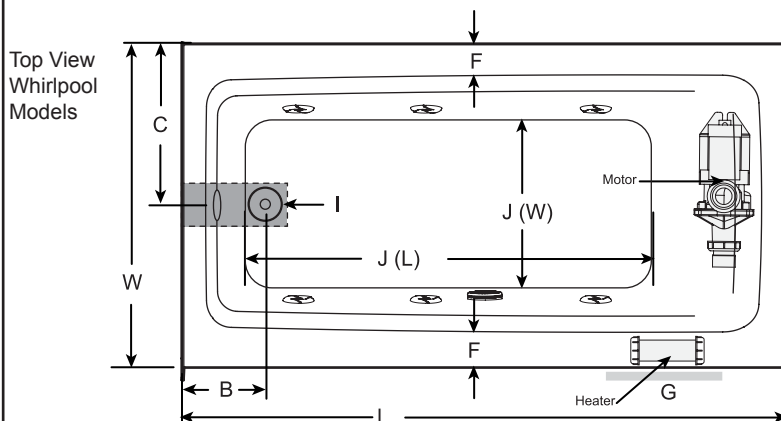


Signature® Collection Low-Profile 16" Skirted Bathtubs

Letter	Description	SOAKER MODELS		WHIRLPOOL MODELS		WHIRLPOOL MODELS Each component requires a seperate, dedicated GFCI protected circuit
		J166030B	J166032B	J166030W	J166032W	
-	Drain/Motor Location	LH / RH Drain		LH / RH Drain & Right or Left Side Motor		
-	Cutout	N/A		N/A		
-	Total Weight	653 lbs (296 kg)	654 lbs (297 kg)	668 lbs (303 kg)	669 lbs (303 kg)	
-	Floor Loading	52 lb/ft² (256 kg/m²)	52 lb/ft² (256 kg/m²)	53 lb/ft² (261 kg/m²)	54 lb/ft² (261 kg/m²)	
-	Operating Gallons (Min/Max)	43 gallons (163 liters)		40 / 43 gallons (151 / 163 liters)		
-	Product Weight	44 lbs (20 kg)	45 lbs (20 kg)	59 lbs (27 kg)	60 lbs (27 kg)	
-	Soaking Depth	11" (279 mm)		11" (279 mm)		
L	Outer Length	60" (1524 mm)		60" (1524 mm)		
W	Outer Width	30" (762 mm)	32" (813 mm)	30" (762 mm)	32" (813 mm)	
H	Overall Height	16" (406 mm)		16" (406 mm)		
A	Overflow Height	13.5" (343 mm)		13.5" (343 mm)		
B	Long Edge to Drain Center	10.25" (260 mm)		10.25" (260 mm)		
C	Short Edge to Drain Center	14.25" (362 mm)	16.25" (413 mm)	14.25" (362 mm)	16.25" (413 mm)	
D	Drain Shoe Length	6" (152 mm)		6" (152 mm)		
E	Flange Height	1.25" (32 mm)		1.25" (32 mm)		
F	Deck Width	2.25" (57 mm)		2.25" (57 mm)		
G	Service Access Dimensions	N/A		Requires Separate Access		
I	Floor Cutout for Drain	12" x 4" (305 mm x 102 mm)		12" x 4" (305 mm x 102 mm)		
J	Interior Dimensions Bottom of Bath J(L) x J(W)	43.5" x 20.5" (1105 mm x 521 mm)		43.5" x 20.5" (1105 mm x 521 mm)		
K	Interior Dimensions Top of Bath K(L) x K(W)	51.25" x 25" (1302 mm x 635 mm)		51.25" x 25" (1302 mm x 635 mm)		
Model with components						GFCI Outlet (60Hz)
Motor/Pump						120V 15A
Heater (if available)						120V 15A

KEY DIMENSIONS* [NOTE: The overall dimensions are nominal with a tolerance of +0 and -.25" (6mm).]

NOTE: Drawings not to scale.

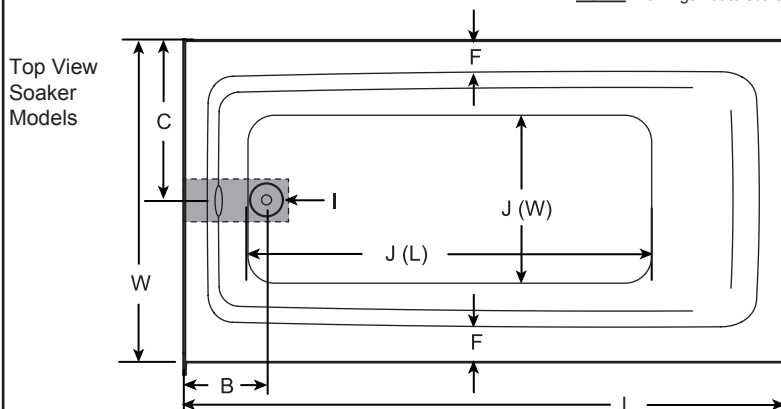

©2019 Jacuzzi Inc. • For additional information, call Customer Service 800-288-4002 • www.jacuzzi.com/baths
Refer to installation instructions included with fixture before beginning installation. Please confirm product availability and specifications before commencing with any installation work.