


Bria™ 6734 Freestanding Pure Air® Bathtub

Letter	Description	Pure Air®	NOTE	
-	Drain Location	Universal	The overall dimensions are nominal with a	
-	Equipment Location	Opposite of Drain	tolerance of +0 and25" (6 mm). Electrical Specification (requires a separate, dedicated GFCI protected circuit): Motor/Pump: 120V 15A 60Hz	
-	Floor Template	RA17000		
-	Drop-In Cutout Dimensions (L x W)			
-	Total Weight	819 lbs (371 kg)		
-	Floor Loading	53 lb/ft ² (259 kg/m ²)		
-	Operating Gallons (Min./Max.)	55 Gal (208 L)		
-	Product Weight	112 lbs (51 kg)	7	
-	Soaking Depth	15.6" (396 mm)		
L	Outer Length	67" (1702 mm)	7	
W	Outer Width	33.5" (851 mm)		
Н	Overall Height	22.7" / 28.3" (577 mm / 719 mm)	7	
А	Overflow Height	16" (406 mm)		
В	Long Edge to Drain Center	13.5" (343 mm)		
С	Short Edge to Drain Center	16.7" (424 mm)		
D	Drain Shoe Length			
Е	Flange Height			
F	Deck Width*	5.5" (140 mm)		
G	Service Access Dimensions	No Service Access		
I	Floor Cutout for Drain	4" x 4" (102 mm x 102 mm)		
J	Interior Dimensions Bottom of Bath (L x W)	43.8" x 21.5" (1113 mm x 546 mm)		
к	Interior Dimensions Top of Bath (L x W)	60.1" x 30.7" (1527 mm x 780 mm)		
L2	Interior Depth - Drain End	17.9" (455 mm)		
М	Backrest Angle	18.8°		
Ν	Footprint (L x W)	56.8" x 28.1" (1443 mm x 714 mm)		

KEY DIMENSIONS

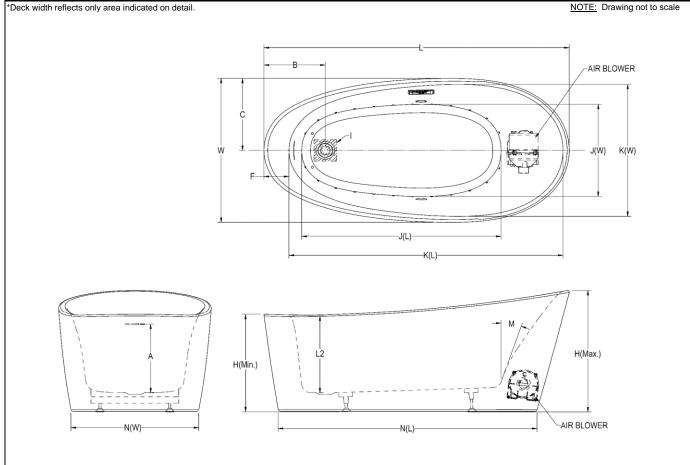

©2022 Jacuzzi Luxury Bath • For additional information, call Customer Service 800-288-4002 • www.jacuzzi.com/baths Refer to installation instructions included with fixture before beginning installation. Please confirm product availability and specifications before commencing with any installation work.

PRODUCT SPECIFICATIONS AND AVAILABILITY ARE SUBJECT TO CHANGE WITHOUT NOTICE