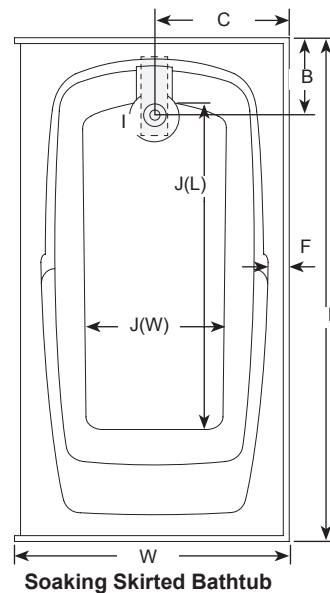


**Cetra® 6036 Whirlpool And Soaking Skirted Bathtubs**

Letter	Description	Whirlpool	Soaking
-	Drain Location	Left Hand / Right Hand	End
-	Whirlpool Pump Location	Opposite end of drain location	N/A
-	Cutout	N/A	N/A
-	Total Weight	993 lb (450 kg)	907 lb (411 kg)
-	Floor Loading	62 lb/ft <sup>2</sup> (303 kg/m <sup>2</sup> )	61 lb/ft <sup>2</sup> (297 kg/m <sup>2</sup> )
-	Operating Gallons (Min/Max)	47 Gal (178L) / 67 Gal (254L)	67 Gal (254L)
-	Product Weight	125 lb (57 kg)	99 lb (45 kg)
L	Outer Length	60.00" (1524 mm)	60.00" (1524 mm)
W	Outer Width	36.00" (914 mm)	36.00" (914 mm)
H	Overall Height	21.25" (540 mm)	21.25" (540 mm)
A	Overflow Height	16.88" (429 mm)	16.88" (429 mm)
B	Long Edge to Drain Center	9.00" (229 mm)	9.00" (229 mm)
C	Short Edge to Drain Center	18.00" (457 mm)	18.00" (457 mm)
D	Drain Shoe Length	7.00" (178 mm)	7.00" (178 mm)
E	Flange Height	1.00" (25mm)	1.00" (25mm)
F	Deck Width	1.25" (32 mm)	1.25" (32 mm)
G	Service Access	12.00 x 18.00" (305 x 457 mm)	N/A
I	Floor Cutout for Drain	12.00 x 4.00" (305 x 102 mm)	12.00 x 4.00" (305 x 102 mm)
J	Interior Dimensions: J(W) x J(L)	21.00 x 40.00" (533 x 1016 mm)	21.00 x 40.00" (533 x 1016 mm)



**NOTE**

The overall dimensions are nominal with a tolerance of +0 and -.25" (6mm).  
 Electrical Specifications  
 (Each component requires a separate, dedicated GFCI protected circuit)  
 Motor/Pump 120V 15A 60HZ  
 Heater (optional) 120V 15A 60HZ





**Key Dimensions**

(Left End Drain / Right Side Whirlpool Pump)

(Right End Drain / Left Side Whirlpool Pump)

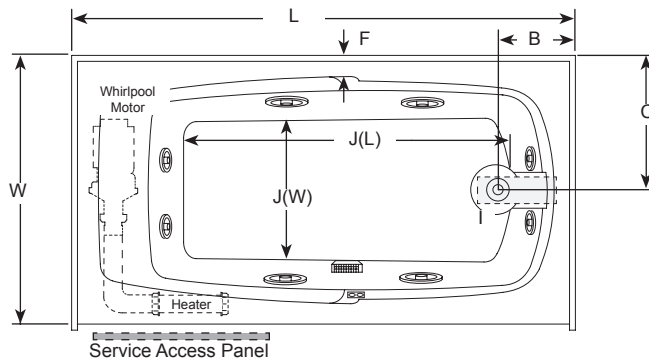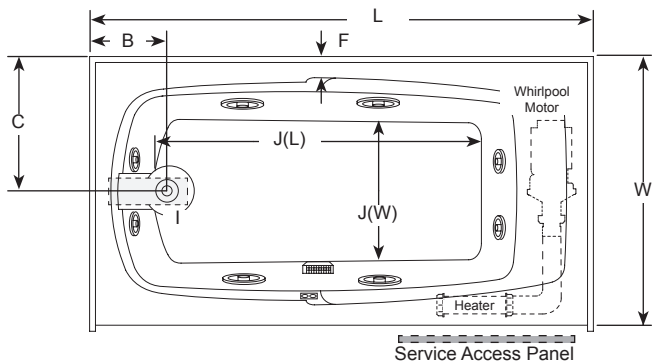

\*Deck width reflects only area indicated on detail.

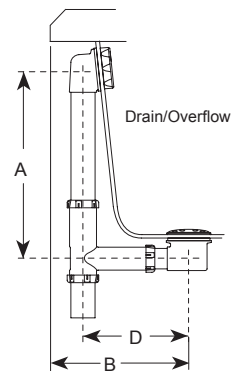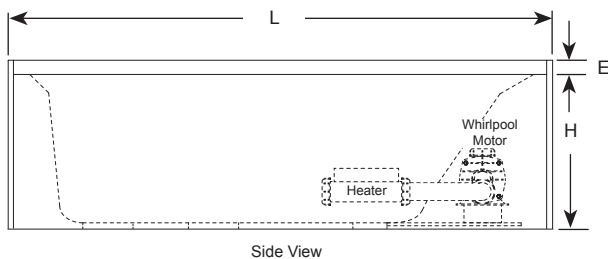

**NOTE:** Drawings not to scale.