


Flair MEDICINE CABINET




FEATURES/TYPICAL SPECIFICATIONS

- Surface Mount Installation
 - Pre-drilled mounting holes
- Formed and welded steel housing (WB/ST)
 - 25 gauge steel construction with white, heat cured, acrylic paint finish
 - Polished stainless steel trim strips - both sides and bottom on body front
 - 22 gauge galvanized steel top cover
- Sliding Mirror Doors
 - 1/8" thick float glass mirror door with polished edges, 4 sides (2 typical)
 - Clear acrylic door pull (2 typical)
 - Mirror doors slide in white PVC dual slotted tracks (2 typical / one top & one bottom) snapped into housing
- Incandescent dual light sockets (2 typical) (Uses four 60 watt maximum, medium base, 120V bulbs (I60A) - bulbs not included)
- .White, translucent plastic lens
 - .060 thick high impact polystyrene
 - Ribbed outside surface
- Grounded on/off switch located top right side of cabinet
- 25 gauge galvanized steel shelf with white, heat cured, acrylic paint finish (1 typical)
 - Fixed shelf (FX)
- Includes installation hardware
- Pallet Quantity = 18 units

Finishes:

Housing: PT01—Basic White
 Mirror: POL1 - Polished Edge
 Cabinet Trim: SS8-Polished Stainless Flat

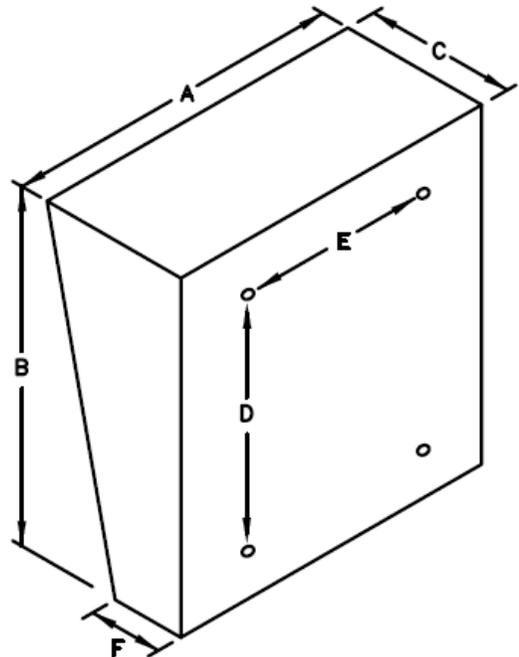

		Dimensions In Inches					
Model #	Description	A	B	C	D	E	F
327LP	MEDCAB 2DR 28X19 SS8 WB/ST	27 ³ / ₄	19 ³ / ₈	7-7/16	9-9/16	22-11/16	4-11/16

REFERENCE	QTY.	REMARKS	Project
			Location
			Architect
			Engineer
			Contractor
			Submitted by
			Date

* All models and material specifications are subject to change or withdrawal without notice.