


Metro Oval MEDICINE CABINET






FEATURES/TYPICAL SPECIFICATIONS

- Recess or Surface Mount Installation
 - Wall Opening/Rough-in Dimensions (for recess applications): 14" x 24" x 3½"
- Formed and welded steel housing construction (WB/ST)
 - 1/8" thick polished edge mirror on housing back
 - 22 gauge steel housing with white, heat cured, acrylic paint finish
 - 12 gauge steel mirror bracket with white, heat cured, acrylic paint finish mechanically fastened to the housing
 - 20 gauge steel return flange with white, heat cured, acrylic paint finish mechanically fastened to the housing in recess mount application only
- Frameless mirror door
 - 3/16" thick float glass oval mirror front with 1" beveled edge
 - 25 gauge steel door back with white, heat cured, acrylic paint finish
- 8" piano hinge welded to the door and mechanically fastened to the mirror bracket on the cabinet housing (HG01) (1 typical)
- Round magnet with soft plastic white cover located in the door aligns to the cabinet body flange (1 typical)
- Reversible for left-hand or right-hand door swing
- 3/16" thick float glass shelves, adjustable (ADJ) (3 typical)
- Snap Fit shelf supports (12 typical)
- Includes 12 gauge steel mounting brackets with white, heat cured, acrylic paint finish (2 typical) and 1/8" thick polished mirror strips for external cabinet side walls in surface mount application (2 typical)
- Mounting hardware included for both recess and surface applications
- Standard Pallet Quantity of 10 units

Finishes:

Housing: PT01—Basic White
 Mirror: 1 BVL—1" Bevel Edge
 Frame: Frameless

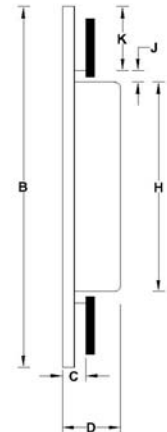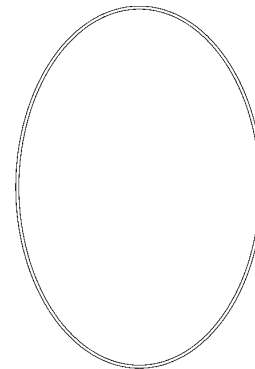

		Dimensions In Inches									
Model #	Description	A	B	C	D	E	F	G	H	J	K
S368244OVWH	MEDCAB 1DR 24X36 FMLS WB/ST	24	36	1¼	4½	13½	¾	15	23½	¾	5½

REFERENCE	QTY.	REMARKS	Project	
			Location	
			Architect	
			Engineer	
			Contractor	
			Submitted by	Date

* All models and material specifications are subject to change or withdrawal without notice.

S368244OVWH_A