


Lighted MEDICINE CABINET




FEATURES/TYPICAL SPECIFICATIONS

- Recess Mount Installation
 - Wall Opening/Rough-in Dimensions: 14" x 19" x 3½"
- Drawn steel housing (HY/ST)
 - 25 gauge formed and welded light housings welded to sides of drawn steel housing (1 left / 1 right typical)
 - 25 gauge formed wiring channel welded to housing top
 - 24 gauge drawn steel housing construction with white, heat cured, acrylic paint finish
- Frame Mirror door
 - Polished stainless steel frame (SS8)
 - 2mm float glass mirror door front
 - 25 gauge steel door back with white, heat cured, acrylic paint finish
- 16" piano hinge with 90° stop welded to the door and mechanically fastened to the cabinet (HG01) (1 typical)
- Magnetic catch in cabinet body flange aligns to stainless steel striker plate on the door (1 typical)
- Right-hand door swing
- High-Impact, clear polystyrene shelves (PC), adjustable (ADJ) (2 typical)
- Aluminum shelf brackets (4 typical)
- Fluorescent side lights (F15T8 / bi-pin / 120V) included (2 typical)
 - Extruded translucent white acrylic ribbed light lenses with UV stabilizer (2 typical)
 - Chrome plated end caps for light lenses (4 typical)
- Grounded switch and convenience outlet
 - Switch and outlet (UL listed) located on right side, above cabinet bottom
- Mounting hardware included
- Standard Pallet Quantity of 24 units

Finishes:

Housing: PT01—Basic white
 Mirror: Flat Mirror
 Frame: SS8—Polished Stainless Steel

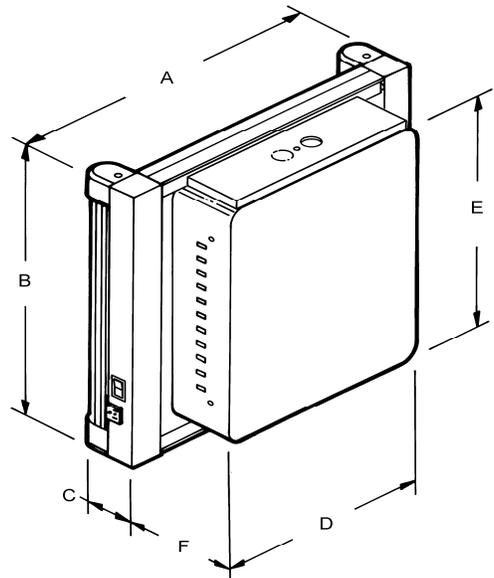

		Dimensions In Inches					
Model #	Description	A	B	C	D	E	F
455FL	MEDCAB 1DR 20X22 SS8 HY/ST	20 ³ / ₈	22 ¹ / ₄	3 ³ / ₈	13 ¹ / ₂	18 ¹ / ₂	3 ³ / ₈

REFERENCE	QTY.	REMARKS	Project
			Location
			Architect
			Engineer
			Contractor
			Submitted by
			Date

* All models and material specifications are subject to change or withdrawal without notice.