


**CAUTION – RISK OF SHOCK –**

Disconnect Power at the main circuit breaker panel or main fuse box before starting and during the installation.


- 1) Attach mounting strap to outlet box using the (2) two supplied mounting strap screws. Mounting strap can be adjusted to suit position of fixture.
  - 2) Grounding instructions: (See Illus. A or B).
    - A) On fixtures where mounting strap is provided with a hole and two raised dimples. Wrap ground wire from outlet box around green ground screw, and thread into hole.
    - B) On fixtures where a cupped washer is provided. Attach ground wire from outlet box under cupped washer and green ground screw, and thread into mounting strap.
- If fixture is provided with ground wire. Connect fixture ground wire to outlet box ground wire with wire connector. After following the above steps. Never connect ground wire to black or white power supply wires.

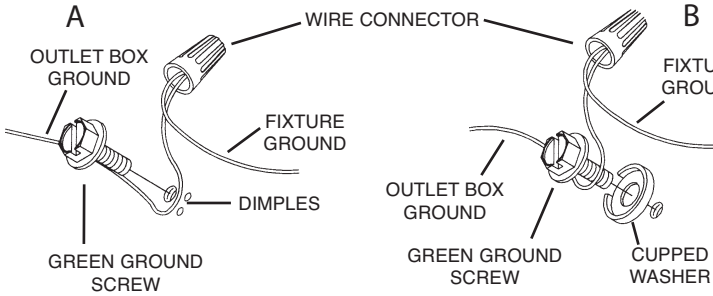

- 3) Make wire connections. Reference chart below for correct connections and wire accordingly.

Connect Black or Red Supply Wire to:	Connect White Supply Wire to:
Black	White
*Parallel cord (round & smooth)	*Parallel cord (square & ridged)
Clear, Brown, Gold or Black without tracer	Clear, Brown, Gold or Black with tracer
Insulated wire (other than green) with copper conductor	Insulated wire (other than green) with silver conductor

\*Note: When parallel wires (SPT I & SPT II) are used. The neutral wire is square shaped or ridged and the other wire will be round in shape or smooth (see illus.)



- 4) Push fixture to wall, carefully screw in the (4) fixture mounting screws through holes in the top and bottom of the canopy. **NOTE**, the fixture can only be mounted with the glass/shade in the up or down position.
- 5) Take item B-shade and place item C-glass inside the shade and place over the bulb socket and using item D-spacer and item E-socket ring thread onto the bulb socket using item F-socket tool. Thread snugly to secure the glass and shade in place. Repeat for the other lights.
- 6) Insert recommended bulb (not included).

