


Features

- Acrylic
- Pump with air switch and grounding-type plug-in cord
- 8 Kohler jets, color matched
- Textured bottom surface
- Drop-in
- 60" (152.4 cm) x 32" (81.3 cm) x 20" (50.8 cm)

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ANSI Z124.1.2
- ASME A112.19.7M
- UL 1795



BATH WHIRLPOOL

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories

- CP: Polished Chrome
- PB: Vibrant_® Polished Brass
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description		Colors/Finishes				
K-1357	Bath whirlpool		0 🗆	□ Other			
Recommended Accessories							
K-7161-AF	Adjustable pop-up drain	CP	🗆 PB	Other			

Product Specification

The acrylic drop-in bath whirlpool shall be 60" (152.4 cm) in length, 32" (81.3 cm) in width, and 20" (50.8 cm) in height. Product shall have 8 color-matched Kohler jets and a textured bottom surface. Product shall feature a pump with air switch actuator and grounding-type plug-in cord. Bath whirlpool shall be Kohler Model K-1357-____.

DEVONSHIRE®

Technical Information

Fixture*:							
Basin area:							
Bathing well	42" (106.7 cm) x 20" (50.8 cm)						
Top area	51" (129.5 cm) x 24" (61 cm)						
Weight	100 lbs (45.4 kg)						
To overflow:							
Water depth	14″ (35.6 cm)						
Capacity	60 gal (227.1 L)						
* Approximate measurements for comparison only.							
Pump:	V	Hz	А				
1-speed	120	60	7				

Required Electrical Service


Dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI):					
Pump/control	120 V, 15A, 60 Hz				
Locate the outlet behind the whirlpool and within 24" (61 cm) of the pump.					

Installation Notes

Install this product according to the installation guide.

Floor support under whirlpool must provide for a minimum of 47 lbs/square foot (230 kg/square meter) loading.

No change in measurements with drain shown. (K-7161-AF or K-7161M-AF)

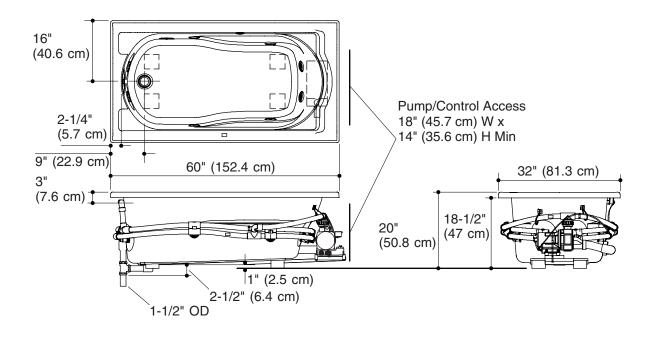

Product Diagram

