

Features


- Acrylic
- Drop-in or three-wall alcove
- 5 individually adjustable ProFlex® hydro-massage jets
- Pump with air switch and grounding-type plug-in cord
- In-line heater
- UL listed
- Optional K-9695 metal finish 5 jet trim kit
- Optional K-1278 removable apron
- 60" (152.4 cm) x 36" (91.4 cm) x 20" (50.8 cm)

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ASME A112.19.7M
- ANSI Z124.1.2
- UL 1795

BATH WHIRLPOOL WITH HEATER K-1239-H ALSO K-1239-LH, K-1239-RH

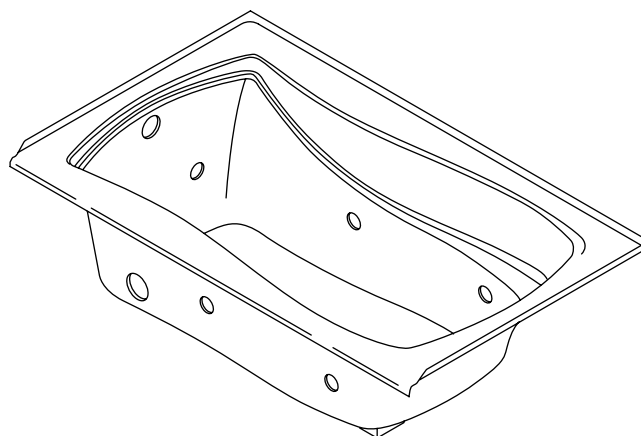

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories

- CP: Polished Chrome
- PB: Vibrant® Polished Brass
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Colors/Finishes		
K-1239-H	Bath whirlpool with heater – drop-in	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____	
K-1239-LH	Bath whirlpool with heater – three-wall alcove, left drain (shown)	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____	
K-1239-RH	Bath whirlpool with heater – three-wall alcove, right drain	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____	
Recommended Accessories				
K-7161-AF	Adjustable pop-up drain with tailpiece	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other_____
Optional Accessories				
K-1278	Removable apron	<input type="checkbox"/> 0		<input type="checkbox"/> Other_____
K-9695	Metal finish 5 jet trim kit		<input type="checkbox"/> CP <input type="checkbox"/> PB	<input type="checkbox"/> Other_____

Product Specification

The acrylic bath whirlpool shall be 60" (152.4 cm) in length, 36" (91.4 cm) in width, and 20" (50.8 cm) in height. Product shall be for drop-in installation [K-1239-H] or three-wall alcove installation [K-1239-LH, K-1239-RH]. Product shall include 5 individually adjustable ProFlex hydro-massage jets, a pump with air switch and grounding-type plug-in cord, and an in-line heater. Product shall be UL listed. Product shall be available with an optional K-1278 removable apron and an optional K-9695 metal finish 5 jet trim kit. Bath whirlpool shall be Kohler Model K-1239-_____-_____.

MARIPOSA®

Technical Information

Fixture*:	
Basin area:	
Bathing area, bottom	46" (116.8 cm) x 24" (61 cm)
Bathing area, top	54" (137.2 cm) x 27" (68.6 cm)
Weight	110 lbs (49.9 kg)
To overflow:	
Water depth	14" (35.6 cm)
Capacity	63 gal (238.5 L)
* Approximate measurements for comparison only.	

Drop-in cutout:	58" (147.3 cm) x 34" (86.4 cm)
-----------------	--------------------------------

Pump		V	Hz	A
1-speed		120	60	7.5
Heater:	Kw	V	Hz	Hz
	1.5	120	60	12.5

Required Electrical Service

Two dedicated circuits required, each protected with Class A Ground-Fault Circuit-Interrupter (GFCI):

Pump/control 120 V, 15 A, 60 Hz

Heater 120 V, 15 A, 60 Hz

Locate the outlets behind the whirlpool and within 24" (61 cm) of the pump.

Installation Notes

Install this product according to the installation guide.


Floor support under whirlpool must provide for a minimum of 44 lbs/square foot (215 kg/square meter) loading.

If installing a rim-mount faucet, make sure there is no interference with the drain overflow before drilling any holes. Consult local and national codes for minimum air gap requirements if installing a spout on the faucet deck.

The apron must be installed before the finished floor and wall materials are installed.

No change in measurements if connected with drain illustrated. (K-7161-AF or K-7161M-AF)

Recommended Faucet Area

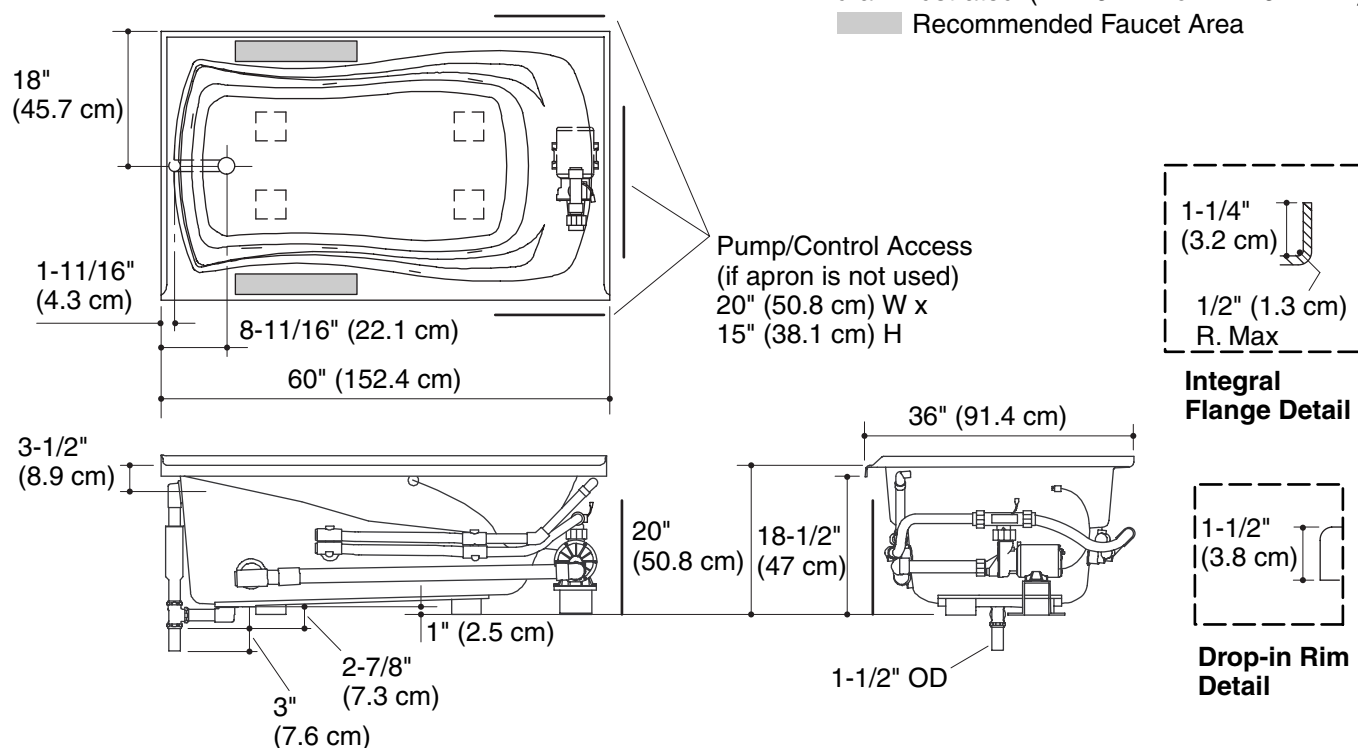

Product Diagram

MARIPOSA® BATH WHIRLPOOL WITH HEATER

Page 2 of 2
1014711-4-C

THE BOLD LOOK
OF **KOHLER**®