

STEWARD_®

Features

- Vitreous china
- Includes removable strainer, sealing liquid sample, cleaner sample, urinal ball sample, 2" outlet spud, universal mounting bracket, and hangers
- 15-5/8" (397 mm) extended rim


Codes/Standards Applicable

Specified model meets or exceeds the following:

- ADA when rim is mounted no higher than 17" (432 mm) from finished floor
- ICC/ANSI A117.1
- ASME A112.19.2/CSA B45.1
- ASME A112.19.19-06



ADA



Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories

• NA: None applicable

Specified Model

Model	Description	Colors/Finishes		
K-4918	Waterless urinal	0	☐ Other	
Optional Accessories				
18773	3" outlet spud		□NA	

Product Specification

The waterless urinal shall be made of vitreous china. The urinal shall have a 15-5/8" (397 mm) extended rim. The urinal shall include removable strainer, sealing liquid sample, cleaner sample, urinal ball sample, 2" outlet spud, universal mounting bracket, and hangers. The urinal shall be Kohler Model K-4918-_____.

STEWARD_®

Technical Information

Included components:			
2" outlet spud	18766		
Hanger (2 required)	64512		
Universal mounting bracket	1044200		
Removable strainer	1046455		
3 oz (89 ml) sealing liquid sample	1048655		
Cleaner sample	1050486		
Urinal ball sample	1156066		

Installation Notes

Install this product according to the installation guide.


Roughing-in remains the same when using the optional 3" outlet spud.

NOTICE: For ADA compliance, measurement must be from the floor to the top of the internal lip.

Will comply with **ADA** when installed per Section 605 Urinals of the Act.



CAUTION: Risk of property damage. When connecting waterless urinals to the building drain waste vent system, do not use copper pipe or copper tube connectors. The use of a copper connector will result in corrosion of the connector and potential building structure damage caused by leakage.

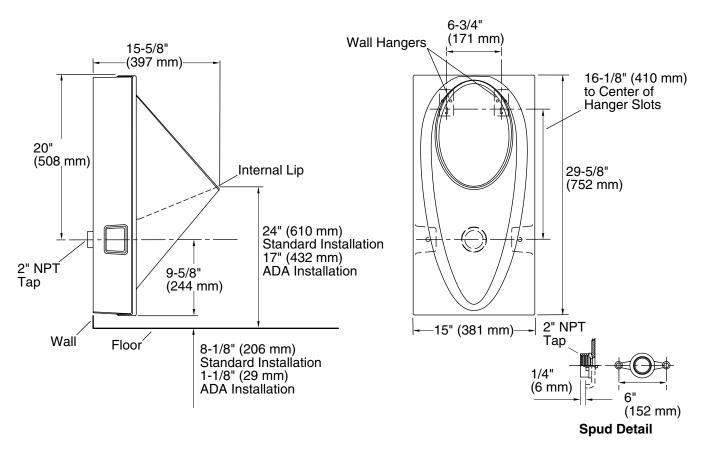

Product Diagram

