

UNDERSCORETM

5.5' (1.7 m) BATH **K-1136**


Features

- Acrylic
- Drop-in installation
- Molded lumbar support
- 102 gallon (386 L) capacity
- 66" (167.6 cm) x 36" (91.4 cm) x 22" (55.9 cm)

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ANSI Z124.1.2
- CSA B45.0
- CSA B45.5
- ASTM E162
- ASTM E662



Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories

- CP: Polished Chrome
- Other: Refer to Price Book for additional colors/finishes
- NA: None applicable

Specified Model

Model	Description	Colors	Colors/Finishes		
K-1136	5.5' (1.7 m) bath – drop-in	□ 0		☐ Other	
Required A	ccessories				
K-7271	Clearflo slotted overflow brass bath drain OR) CP	☐ Other	
K-7272	Clearflo slotted overflow bath drain - PVC pipe) CP	□ Other	
Optional A	ccessories				
K-591	Undermount kit			□NA	

Product Specification

The acrylic bath shall be 66" (167.6 cm) in length, 36" (91.4 cm) in width, and 22" (55.9 cm) in height. Bath shall be for drop-in installation. Bath shall have a 102 gallon (386 L) capacity. Bath shall have a molded lumbar support. Bath shall be Kohler Model K-1136-____.

UNDERSCORETM

Technical Information


Fixture*:				
Bathing well:				
Basin area, bottom	44-1/2" (113 cm) x 26-1/2" (67.3 cm)			
Basin area, top	60-1/4" (153 cm) x 30-1/4" (76.8 cm)			
Weight	80 lbs (36.3 kg)			
To overflow:				
Water depth	17-3/4" (45.1 cm)			
Capacity	102 gal (386 L)			
* Approximate measurements for comparison only.				
Drop-in cut-out	65" (165.1 cm) x 35" (88.9 cm)			

Installation Notes


Install this product according to the installation guide.


Floor support under bath must provide for a minimum of 58 lbs/square foot (283 kg/square meter) loading.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.



No change in measurements if connected with required drain illustrated. (K-7272)

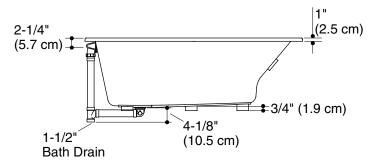



Product Diagram

