

Features

- Acrylic
- Drop-in or under-mount installation
- Molded heated lumbar support
- Three temperature settings
- 60" (1524 mm) x 30" (762 mm) x 19" (483 mm)


5' DROP-IN BATH BASK™ WITH HEATED SURFACE K-1121-W1

ADA

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ADA
- ICC/ANSI A117.1
- ASME A112.19.7
- CSA B45.5/IAPMO Z124
- ASTM E162
- ASTM E662
- UL 1795

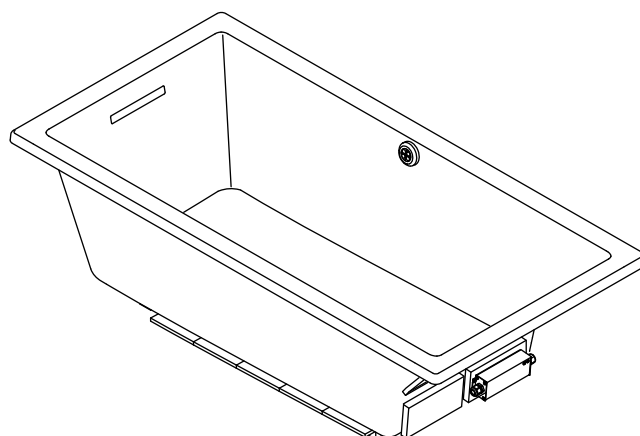

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories

- 0: White
- CP: Polished Chrome
- PB: Vibrant® Polished Brass
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Colors/Finishes	
K-1121-W1	5' drop-in bath Bask with heated surface	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
Required Accessories			
K-7271	Clearflo slotted overflow brass bath drain OR	<input type="checkbox"/> CP	<input type="checkbox"/> Other_____
K-7272	Clearflo slotted overflow bath drain – PVC pipe	<input type="checkbox"/> CP	<input type="checkbox"/> Other_____
Optional Accessories			
K-531	Under-mount kit	<input type="checkbox"/> NA	
K-1491	Pillow	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
K-1601	Footstop	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____

Product Specification

The acrylic bath with heated surface shall be 60" (1524 mm) in length, 30" (762 mm) in width, and 19" (483 mm) in height. Bath shall be for drop-in or under-mount installation. Bath shall have molded heated lumbar support. Bath shall have three temperature settings. Bath shall be Kohler Model K-1121-W1-_____.

UNDERScore®

Technical Information

Fixture*:					
Bathing well:					
Basin area, bottom		42-3/8" (1076 mm) x 20" (508 mm)			
Basin area, top		54-3/8" (1381 mm) x 24-5/16" (618 mm)			
Weight		71 lbs (32.2 kg)			
To overflow:					
Water depth		15-1/16" (383 mm)			
Capacity		59.8 gal (226 L)			
* Approximate measurements for comparison only.					
Drop-in cut-out		59-1/2" (1511 mm) x 28-1/2" (724 mm)			
Heater:		W	V	HZ	A
		65	120	60	1.1

Installation Notes


Install this product according to the installation guide.

Locate the bath within 24" (610 mm) of a GFCI-protected, 120 V, 15 A, grounded electrical outlet.

Will comply with **ADA** when installed per Section 607 Bathtubs of the Act.


Floor support under bath must provide for a minimum of 50 lbs/square foot (242 kg/square meter) loading.

Hot water supply should be 70% of capacity or greater. Installations will vary.

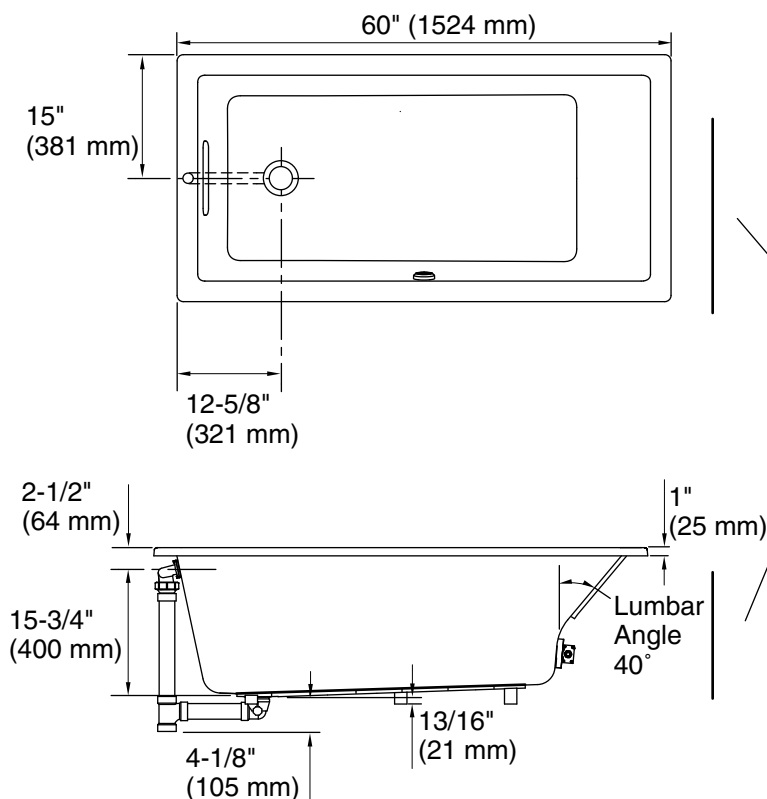

No change in measurement if connected with drain illustrated. (K-7272)

Access Panel
30" (762 mm) L x 15" (381 mm) H Min

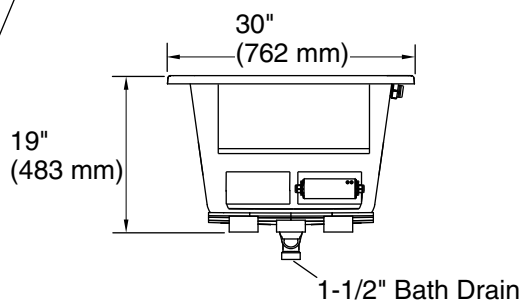

Product Diagram

UNDERScore® 5' DROP-IN BATH BASK™ WITH HEATED SURFACE

Page 2 of 2
1196033-4-A

THE BOLD LOOK
OF **KOHLER**®