

Features

- Brass construction
- Requires an AC power supply
- Single-hole mounting
- Above-counter valve for easy installation and maintenance
- Vandal-resistant aerator
- 24" (61 cm) flexible supply hoses for easy installation
- 5-3/4" (14.6 cm) spout reach
- Stationary spout
- Available with or without mixer
- Less drain
- .5 gallons (1.9 L) per minute flow rate


Codes/Standards Applicable

Specified model meets or exceeds the following at date of manufacture:

- ADA
- ICC/ANSI A117.1
- CSA B651
- OBC
- ASME A112.18.1/CSA B125.1
- Energy Policy Act of 1992

ELECTRONIC FAUCET K-13462 ALSO K-13463

ADA	CSA B651	OBC
-----	----------	-----

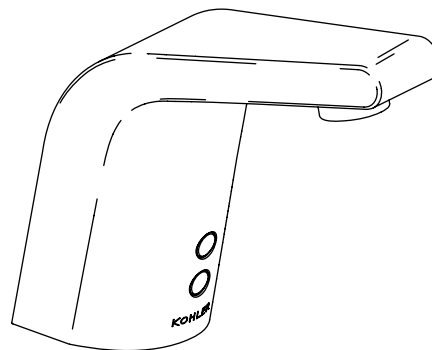

Colors/Finishes

- CP: Polished Chrome
- VS: Stainless Steel

Accessories

- CP: Polished Chrome
- VS: Stainless Steel
- NA: None applicable
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Colors/Finishes	
K-13462	Electronic faucet – with mixer	☐ CP	☐ VS
K-13463	Electronic faucet – without mixer	☐ CP	☐ VS

Required Accessories		
K-13480	AC single supply transformer	☐ NA
K-13481	AC multi-outlet power supply (up to 8 faucets)	☐ NA
K-13487	AC supply 4' (1.2 m) cable assembly OR	☐ NA
K-13602	AC supply 6' (1.8 m) cable assembly OR	☐ NA

Product Specification

The electronic faucet shall be made of brass construction. Product shall require an AC power supply. Product shall have 0.5 gallons (1.9 L) per minute flow rate. Product shall feature a 5-3/4" (14.6 cm) spout reach, stationary spout, and 24" (61 cm) flexible supply hoses for easy installation. Product shall feature an above-counter valve for easy installation and maintenance. Product shall be for single-hole mounting. Product shall be available with or without mixer and less drain. Faucet shall be Kohler Model K-____-____.

Required Accessories					
K-13603	AC supply 8' (2.4 m) cable assembly	OR			☐ NA
K-13604	AC supply 10' (3 m) cable assembly				☐ NA
Optional Accessories					
K-7129-A	Grid drain with overflow	☐ CP			☐ Other _____
K-7129	Grid drain without overflow	☐ CP			☐ Other _____
K-13478-A	4" (10.2 cm) escutcheon plate – round	☐ CP	☐ VS		
K-13479-A	8" (20.3 cm) escutcheon plate – round	☐ CP	☐ VS		
K-13601	Thermostatic mixing valve			☐ NA	

Installation Notes

Install this product according to the installation guide.

A 1-1/4" (3.2 cm) minimum to 1-1/2" (3.8 cm) maximum diameter mounting hole is required.

The minimum distance between the back of the faucet spout and the wall must be 1-3/4" (4.4 cm). This will allow proper clearance for setscrew access.


The maximum distance between the lavatory basin edge to the base of the faucet spout must be 1-3/4" (4.4 cm).

The maximum height of the lip basin should be 3/4" (1.9 cm).

Product includes 0.5 gpm (1.9 lpm) rosebud spray aerator. Other aerator styles are available. Please contact your distributor or see Kohler.com.

This product requires an AC power supply (not included).

ADA, CSA B651, OBC compliant when installed to the specific requirements of these regulations.

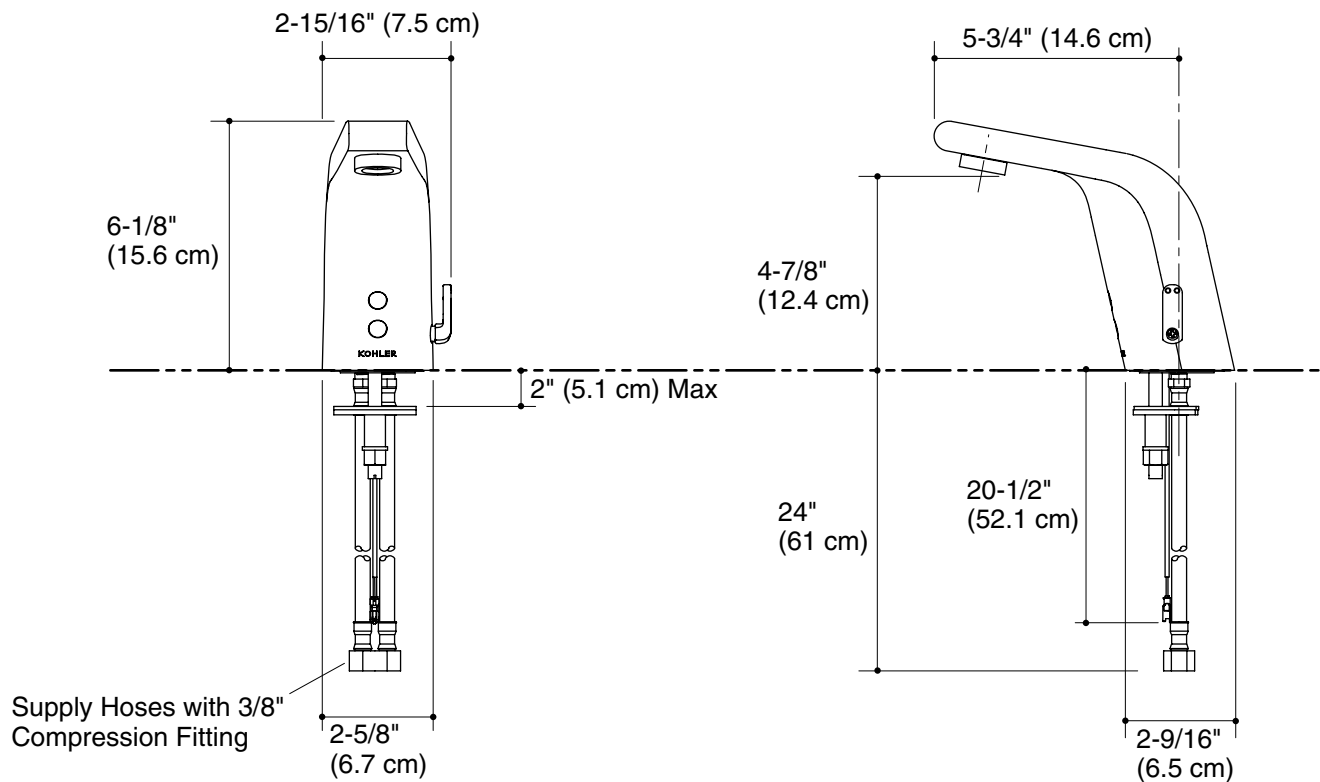

Product Diagram