

UNDERTONE_®/LYRIC™

Features


- 19-gauge stainless steel
- · Self-rimming or undercounter
- Single compartment
- Rounded bowl(s)
- Includes SilentShield_® sound-absorption technology
- Includes installation hardware
- 18-3/8" (46.7 cm) diameter (self-rimming)
- 15" (38.1 cm) diameter (undercounter)

Codes/Standards Applicable

Specified model meets or exceeds the following:

ASME A112.19.3/CSA B45.4





Colors/Finishes

NA: None applicable

• SBV: Satin Bronze

Accessories

- 0: White
- CP: Polished Chrome
- NA: None applicable
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Colors/Finishes
K-3341	Self-rimming/undercounter – kitchen sink	□ NA
K-14302	Self-rimming/undercounter – entertainment sink	□ SVB

Optional Accessories						
K-6004	Bottom basin rack	□ 0			☐ Other	
K-6514	Hardwood cutting board		□NA			
K-6518	Wire rinse basket	□ 0			☐ Other	
K-8801	Duostrainer _® sink strainer			□ CP	☐ Other	
K-8813	Stainless steel sink strainer with tailpiece			□ CP		
K-8814	Stainless steel sink strainer less tailpiece			□СР		

Product Specification

The round sink shall be 18-3/8" (46.7 cm) in diameter when installed as self-rimming or 15" (38.1 cm) in diameter when installed as undercounter. Sink shall be made of 19 gauge stainless steel. Sink shall be single compartment. Sink shall include installation hardware. Sink shall include SilentShield Plus sound-deadening system. Sink shall be Kohler Model K-

UNDERTONE_®/LYRIC™

Technical Information

Fixture*:				
Basin area	15" (38.1 cm) D.			
Water depth	7-1/2" (19.1 cm)			
Drain hole	3-5/8" (9.2 cm) D.			
*Approximate measurements for comparison only.				

Included components:				
Lug pack (self-rimming)	7257			
Clamp accessory pack (undercounter)	52047			
Cut-out template	113392-7			


Installation Notes

Install this product according to the installation guide.

Supplied basin clamp assemblies require 1" (2.5 cm) minimum countertop thickness. Installer must supply hardware for thinner countertops.

For multiple bowl undercounter installations, a minimum distance of 3-1/2" (8.9 cm) is required between bowls. Countertop supplier to determine required support.

Waterproof unprotected overhang area of the underside of wood counter.

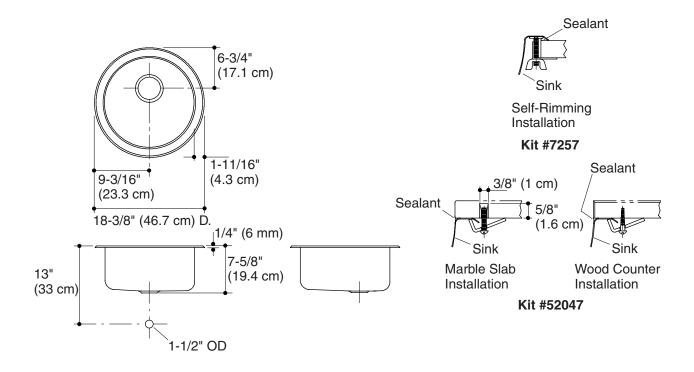

Product Diagram

