

### **TABORET**<sub>®</sub>

K-8215-4

LAVATORY FAUCET

#### **Features**


- Brass construction
- Brass valve bodies
- · Quarter-turn washerless ceramic disc valves
- Pop-up drain with lift rod and tailpiece
- Flexible connections for easy installation
- 2.0 gallons (7.6 L) per minute flow rate
- Lower flow aerator options are available (refer to the Kohler Price Book)
- · Variety of handle style options
- 5" (12.7 cm) high-arch spout

#### **Codes/Standards Applicable**

Specified model meets or exceeds the following:

- ADA
- ASME A112.18.1/CSA B125.1
- Energy Policy Act of 1992
- NSF 61
- CSA International

# K-8215-K ALSO K-8215 ADA



#### Colors/Finishes

- CP: Polished Chrome
- PB: Vibrant® Polished Brass

K-8215-K

• Other: Refer to Price Book for additional colors/finishes

#### **Specified Model**

For complete faucet, both base faucet and handles must be specified.

Model	Description	Co	Colors/Finishes			
K-8215-K	Lavatory faucet without handles		□ CP □ PB		☐ Other	
K-8215-4	Lavatory faucet with lever handles					ner
Required Acc	cessory (Includes Two Handles)		52	ADA	6	
K-16070-4	Lever handles OR		□ CP	□ PB		
K-16070-4A	Swirl handles <b>OR</b>				□ CP	□ PB
K-16070-4C	Vandal-proof lever handles and aerator		□ CP	□ PB		
Optional Acc	essories					
40003	Wrench for long-stemmed ceramic valve bodies					□ NA

<b>Product</b>	<b>Specifi</b>	ication
----------------	----------------	---------

Two-handle widespread lavatory faucet shall be of brass construction. Faucet shall feature brass valve bodies. Faucet shall feature quarter-turn washerless ceramic disc valves. Faucet shall be rated at

2.0 gallons (7.5 L) per minute. Faucet shall have lower flow aerator options. Faucet shall include 5" (12.7 cm) high-arch spout, flexible connections, pop-up drain with lift rod and tailpiece, and handles. Base faucet shall be Kohler Model K-8215-K-\_\_\_\_ with K-16070-\_\_\_\_\_- handles **OR** complete faucet shall be Kohler Model K-8215-4-\_\_\_\_.


USA: 1-800-4-KOHLER Canada: 1-800-964-5590

kohler.com

## **TABORET**<sub>®</sub>

#### **Installation Notes**

Install this product according to the installation guide. Valve inlets accommodate 1/2" OD tubing for slip joint connections.

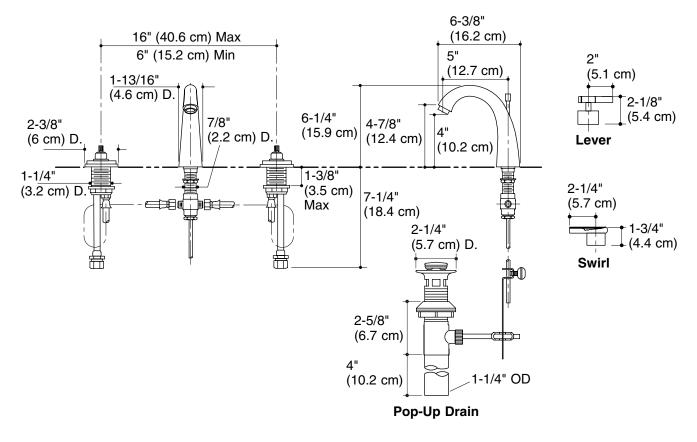

**Product Diagram** 

