

### Features


- Vitreous china
- Angle back and wall outlet
- 1-1/2" top spud
- 2-3/8" (60 mm) passageway
- 11" (279 mm) x 9-1/2" (241 mm) water area
- 4-1/2" (114 mm) rough-in
- 1.6 gpf (6 lpf)
- ADA compliant when a K-4679 open-front toilet seat is installed
- 27-1/2" (699 mm) x 14-1/2" (368 mm) x 15" (381 mm)

### Codes/Standards Applicable

Specified model meets or exceeds the following:

- ADA
- ICC/ANSI A117.1
- CSA B651
- OBC
- ASME A112.19.2/CSA B45.1

### ELONGATED BOWL TOILET K-4386

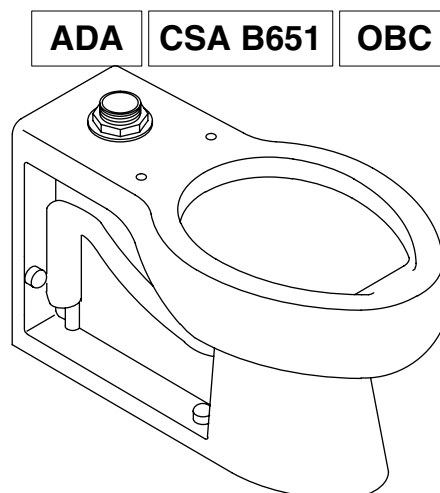

### Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

### Accessories:

- 0: White
- Other: Refer to Price Book for additional colors/finishes

### Specified Model

Model	Description	Colors/Finishes	
K-4386	Elongated bowl toilet	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
K-4386-L	Elongated bowl toilet with bedpan lugs	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
<b>Recommended Accessories</b>			
K-4670-C	Lustra™ open-front seat	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
K-4670-CA	Lustra open-front seat with anti-microbial agent	<input type="checkbox"/> 0	
K-4679	Lustra open-front seat with anti-microbial agent, less cover	<input type="checkbox"/> 0	
21401	Floor bolts (pair)		

### Product Specification

The elongated bowl shall be made of vitreous china. Bowl shall be 27-1/2" (699 mm) in length, 14-1/2" (368 mm) in width, and 15" (381 mm) in height. Bowl shall have 11" (279 mm) by 9-1/2" (241 mm) water area. Bowl shall have a 4-1/2" (114 mm) rough-in with a 1-1/2" top spud. Bowl shall feature 1.6 gpf (6 lpf), a 2-3/8" (60 mm) passageway, and an angle back and wall outlet. Bowl shall be ADA compliant when a K-4679 open-front toilet seat is installed. Bowl shall be Kohler Model K-4386-\_\_\_\_\_.

## Technical Information

Fixture:	
Configuration	Top spud, elongated
Water per flush	1.6 gal (6 L)*
Spud size	1-1/2"
Passageway	2-3/8" (60 mm)
Water area	11" (279 mm) x 9-1/2" (241 mm)
Water depth from rim	5-1/4" (133 mm)
Seat post hole centers	5-1/2" (140 mm)
Minimum static pressure required	35 psi (241.3 kPa)
Maximum static pressure	80 psi (551.6 kPa)
Minimum flowing pressure required	25 psi (172.4 kPa)
Required supply minimum	25 gpm (94.6 lpm)
* Designed to flush with 1.6 gal (6 L) of water when installed with a 1.6 gpf (6 lpf) valve.	

### Included components:

Spud	18357
Bolt caps (pair)	52048
Floor screws (pair)	21402

## Installation Notes


Install this product according to the installation guide.

Refer to manufacturer and local codes for flush valve requirements.

Will comply with the American Disabilities Act (**ADA**) when installed per the requirements of the Accessibility Guidelines, Section 604 Water Closets, of the Act. The Model Plumbing Codes require the installation of elongated open-front toilet seats in public bathrooms.

Will comply with **CSA B651** when installed per Clause 4.3.6 of the standard.

Will comply with **OBC** when installed per Clause 3.8.3.8 and 3.8.3.9.

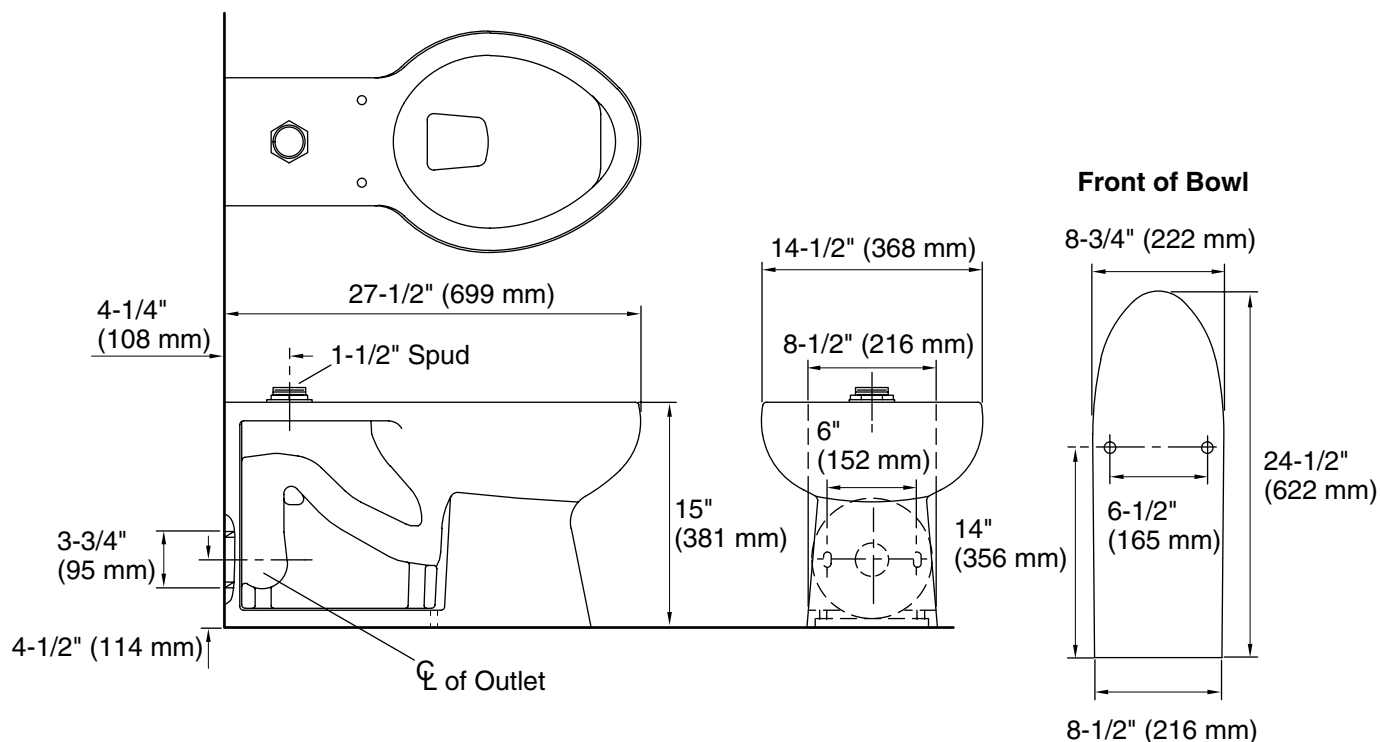

## Product Diagram