



Sunward®
5' Bath with Bask™ Heated Surface
K-1163-S1W

Features


- Bask™ heated surface with three temperature settings.
- Molded lumbar support and armrests for comfort.
- Oval shape.
- Reversible drain.
- Textured bottom surface.
- 60 " (1524 mm) x 42 " (1067 mm) x 20 " (508 mm)

Material

- ExoCrylic™

Installation

- Drop-in installation.

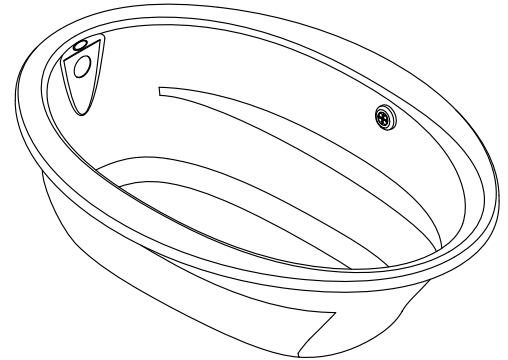

Codes/Standards





CSA B45.5/IAPMO Z124
UL 1795
CSA C22.2 No. 218.2

KOHLER® One-Year Limited Warranty

See website for detailed warranty information.



Available Color/Finishes

Color tiles intended for reference only.



Color	Code	Description
	0	White
	96	Biscuit
	47	Almond
	95	Ice™ Grey

No change in measurements if connected with drain illustrated. (K-11677)

Recommended faucet area

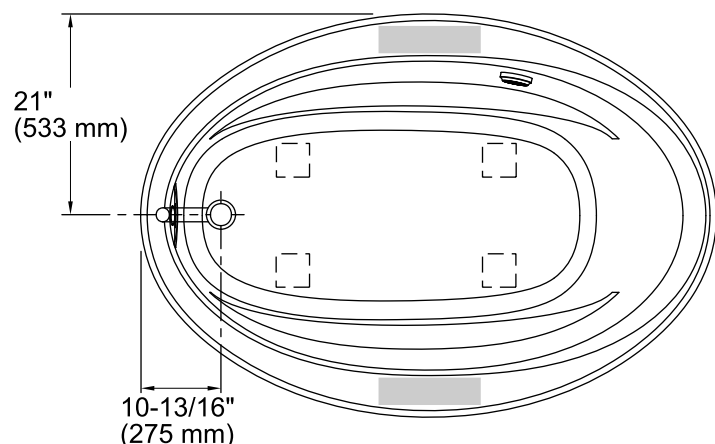

Access Panel
20" (508 mm) W x 15" (381 mm) H

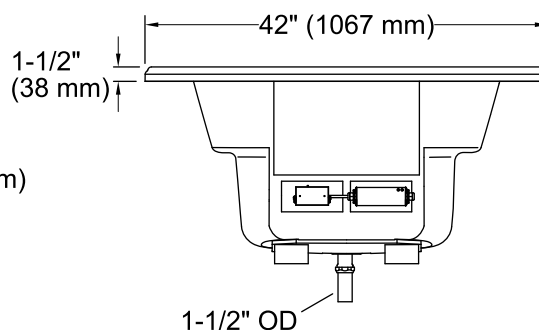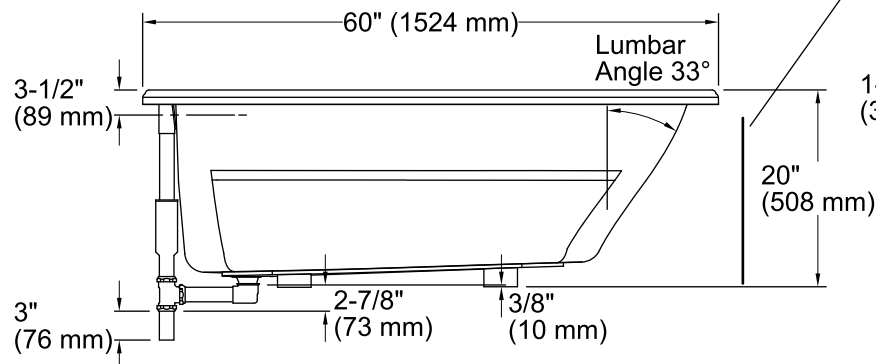

Required Electrical Service

One dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI) or Residual Current Device (RCD).

Heated Surface: 120 V, 15 A, 60 Hz

Technical Information

All product dimensions are nominal.

Installation:	Drop-in
Drain location:	Reversible
Basin area, bottom:	43" x 21-9/16" (1092 mm x 548 mm)
Basin area, top:	53-1/2" x 32-1/8" (1359 mm x 816 mm)
Weight:	81 lbs (36.7 kg)
Minimum floor load:	33 lbs/ft² (161.1 kg/m²)
Water depth:	15" (381 mm)
Water capacity:	57 gal (215.8 L)
Template:	Drop-in, 1042556-7, not required, not included
Under-mount kit:	K-576
Electrical rating:	Heated Surface: 120 V, 0.5 A, 60 Hz

Notes

Install this product according to the installation guide.

Locate the bath within 24" (610 mm) of a GFCI-protected, 120 V, 15 A, grounded electrical outlet.