


**SINGLE-FUNCTION HANDSHOWER
K-99248**



Features

- Single-function handshower with flow control
- Button activated flow rate of 1.5 gal/min (5.7 l/min) to 2.0 gal/min (7.6 l/min)
- Easy to clean MasterClean™ spray nozzles
- Air-induction technology maximizes the air/water mix for a powerful, even flow
- 3-9/16" (90 mm) diameter sprayface
- Includes check valve for backflow prevention
- G1/2"-14 inlet connection
- Earns Water Efficiency points in the LEED Green Building Rating System™ for 1.75 gal/min (6.6 l/min)

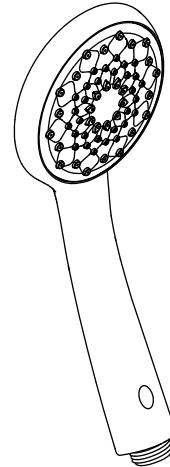

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ASME A112.18.1/CSA B125.1
- EPA WaterSense®

Colors/Finishes

- CP: Polished Chrome
- Other: Refer to Price Book for additional colors/finishes

Accessories

- CP: Polished Chrome
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Colors/Finishes	
K-99248	Single-function handshower, with flow control	<input type="checkbox"/> CP	<input type="checkbox"/> Other _____
Required Accessories			
K-8593	72" (1829 mm) metal shower hose OR	<input type="checkbox"/> CP	<input type="checkbox"/> Other _____
K-9514	60" (1524 mm) metal shower hose OR	<input type="checkbox"/> CP	<input type="checkbox"/> Other _____
K-45981	72" (1829 mm) ribbon shower hose OR	<input type="checkbox"/> CP	<input type="checkbox"/> Other _____
K-45982	60" (1524 mm) ribbon shower hose	<input type="checkbox"/> CP	<input type="checkbox"/> Other _____

Product Specification

The single-function handshower shall feature flow control and button activated flow rate of 1.5 gal/min (5.7 l/min) to 2.0 gal/min (7.6 l/min). Handshower shall feature easy to clean MasterClean spray nozzles. Handshower shall feature air-induction technology to maximize the air/water mix for a powerful, even flow. Handshower shall have 3-9/16" (90 mm) diameter sprayface and G1/2"-14 inlet connection. Handshower shall include check valve for backflow prevention. Handshower shall assist in earning Water Efficiency points in the LEED Green Building Rating System™ for 1.75 gal/min (6.6 l/min) flow rate. Single-function handshower shall be Kohler Model K-99248-_____.


AWAKEN™ B90

Installation Notes

Install this product according to the installation guide.

Plumbing codes require approved backflow prevention devices to be installed in-line to handshowers. Please consult with local plumbing officials.

NOTICE: Choose an automatic compensating valve with the appropriate minimum flow rating to ensure your valve will provide safety at the lowest flow rates. For a handshower rated at 1.5 gal/min (5.7 l/min) maximum, use with an automatic compensating valve rated at 1.2 gal/min (4.5 l/min) or less.

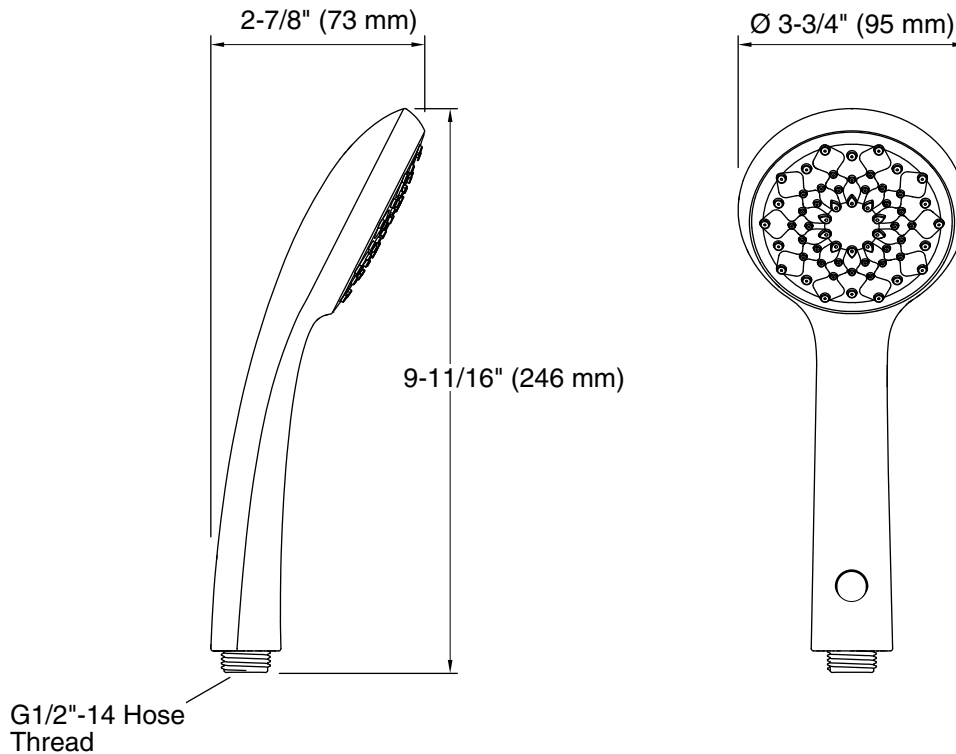

Product Diagram