

BOLERO_®

Features

- 20-gauge stainless steel
- Top-mount or under-mount
- Installation hardware included for each type of installation
- Without overflow
- Chrome plated brass tube and gasket included to cover the overflow hole in the drain assembly
- 16-3/4" (425 mm) x 11-3/4" (298 mm)


Codes/Standards Applicable

Specified model meets or exceeds the following:

- ASME A112.19.3/CSA B45.4
- ADA
- ICC/ANSI A117.1

OVAL BATHROOM SINK K-2611

ADA

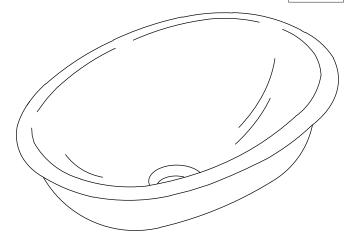

Colors/Finishes

• NA: None applicable

Accessories

- · CP: Polished Chrome
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Col	lors/Finishes		
K-2611-MU	Oval bathroom sink – mirror finish	□ NA			
K-2611-SU	Oval bathroom sink – luster finish	□NA			
Recommended Accessories					
K-8998	P-Trap	□ CP	☐ Other		

Product Specification

Oval bathroom sink shall be made of 20-gauge stainless steel. The bathroom sink shall be 16-3/4" (425 mm) in length and 11-3/4" (298 mm) in width. Bathroom sink shall be either drop-in or under-mount installation. Bathroom sink shall include hardware for both types of installation. Bathroom sink shall be without overflow. Bathroom sink shall have a chrome plated brass tube and drain gasket to cover the overflow hole in the faucet drain assembly. Bathroom sink shall be Kohler Model K-2611-_

BOLERO_®

Technical Information


Fixture*:	Basin area	Water depth		
Bathroom sink	15" (381 mm) x 10" (254 mm)	5-1/2" (140 mm)		
Drain hole	Ø 1-5/8" (41 mm)			
* Assessed as a second as a se				

^{*} Approximate measurements for comparison only.

Included Components:		
Basin clamp assembly (under-mount)	68922	
Basin clamp assembly (drop-in)	7257	
Drain gasket	33507	
Tube	1011037-CP	
Cut-out template	111579-7	


Installation Notes

Install this product according to the installation guide. Will comply with **ADA** when installed per section 606 Lavatories of the Act.

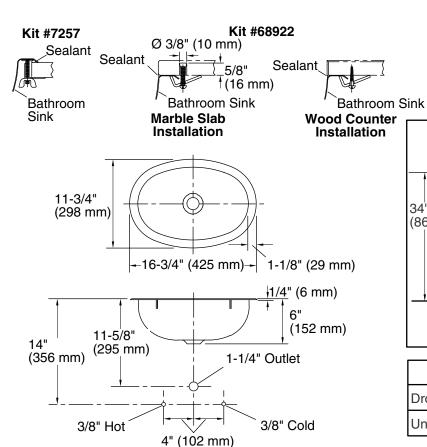

Note: Waterproof unprotected overhang area of the underside of wood counter.

24" (610 mm)



	А	
Drop-in (shown)	7" (178 mm)	
Under-mount	7-3/4" (197 mm)	

Product Diagram

