


Features

- Cast iron with Safeguard® finish
- Left or right drain
- ADA compliant when installed per Section 607 of the Act
- Less all trim
- Variable-speed pump with 1.5 kW heater, back-lit user keypad, and remote control
- 6 Flexjets™
- 60" (152.4 cm) x 33-3/4" (85.7 cm) x 17-7/16" (44.3 cm)

5' BATH WHIRLPOOL K-723-H2 ALSO K-724-H2

ADA

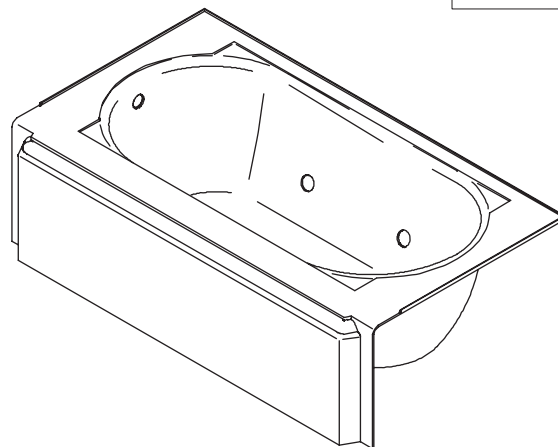

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ADA
- ASME A112.19.1
- ASME A112.19.7M
- ICC/ANSI A117.1

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories

- CP: Polished Chrome
- PB: Vibrant® Polished Brass
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Colors/Finishes	
K-723-H2	5' bath whirlpool – left drain	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
K-724-H2	5' bath whirlpool – right drain	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____

Required Accessories

K-9696	Jet trim kit	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other_____
--------	--------------	-----------------------------	-----------------------------	-------------------------------------

Recommended Accessories

K-7161-AF	Clearflo pop-up bath drain	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other_____
-----------	----------------------------	-----------------------------	-----------------------------	-------------------------------------

Optional Accessories

K-1491	Pillow	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
K-1601	Footstop	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____

Product Specification

The bath whirlpool shall be 60" (152.4 cm) in length, 33-3/4" (85.7 cm) in width, and 17-7/16" (44.3 cm) in height. Bath whirlpool shall be made of cast iron with Safeguard finish. Bath whirlpool shall have 6 Flexjets, a variable speed pump with 1.5 kW heater, and back-lit user control. Bath whirlpool shall be less all trim. Bath whirlpool shall be ADA compliant when installed per Section 607 of the Act. Bath whirlpool shall be Kohler Model K-_____-_____-_____.

MEMOIRS®

Technical Information

Fixture*:	
Bathing well:	
Basin area, bottom	45" (114.3 cm) x 23" (58.4 cm)
Basin area, top	54" (137.2 cm) x 25" (63.5 cm)
Weight	390 lbs (176.9 kg)
To overflow:	
Water depth	11-5/8" (29.5 cm)
Capacity	52 gal (196.8 L)
* Approximate measurements for comparison only.	

Pump	kW	V	A*
	1.5	240	11
* Approximate measurements for comparison only.			

Minimum access panel (required):	
Pump/control	30" (76.2 cm) W x 15" (38.1 cm) H

Required Electrical Service

Dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI) or Residual Current Device (RCD):


Pump/control 208-240 V, 20 A, 50/60 Hz

Installation Notes

NOTE: Pump protrusion beyond rim.

Install this product according to the installation guide.

Floor support under whirlpool must provide for a minimum of 61 lbs/square foot (295 kg/square meter) loading.

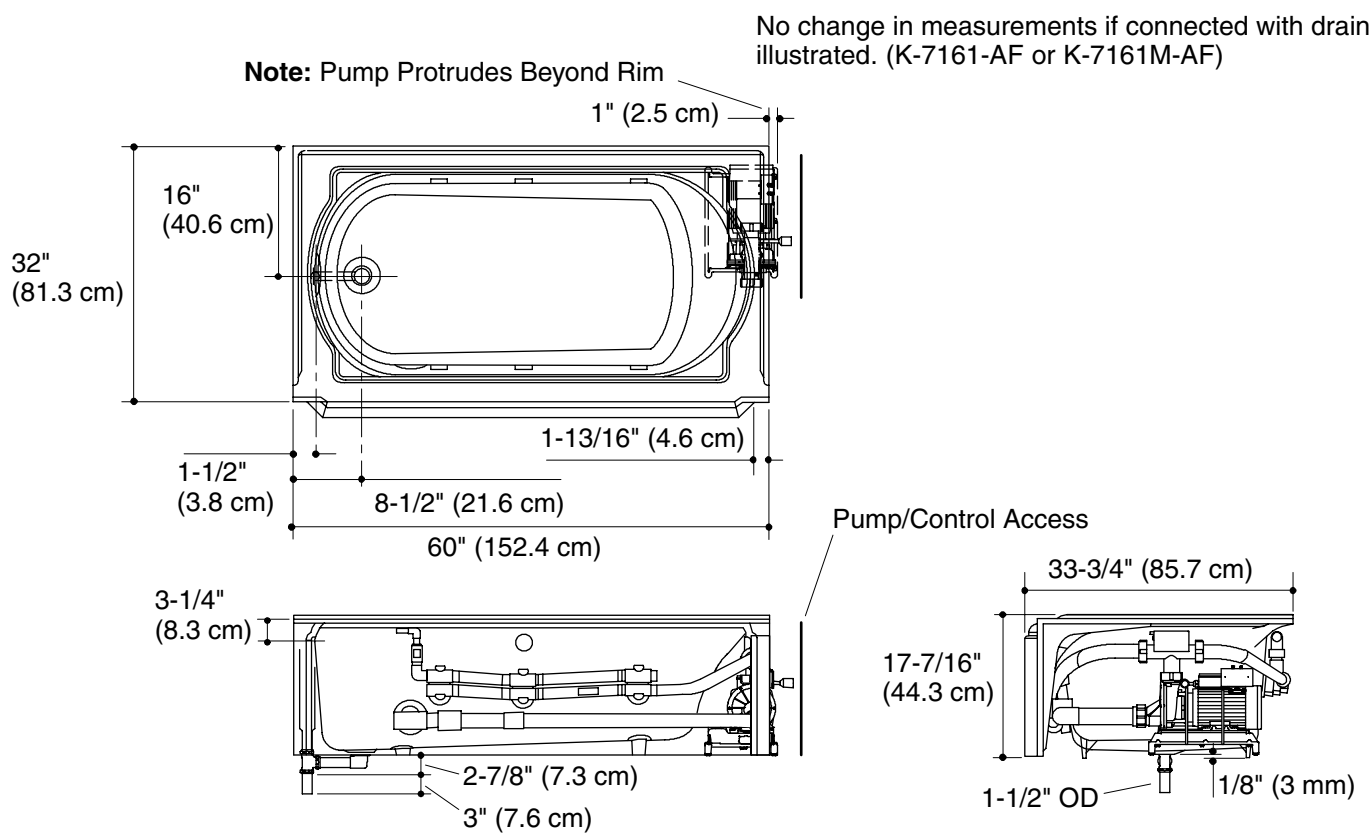

Product Diagram