



Archer®
5' Bath Whirlpool
K-1947-LA

Features

- 8 color-matched Kohler hydro-massage jets.
- Integral apron with removable access panel.
- Pump with air switch and grounding-type plug-in cord.
- Integral tile flange.
- Slotted overflow for maximum bathing depth.
- Low threshold height.
- Integral lumbar support.
- 60" (1524 mm) x 30" (762 mm) x 19" (483 mm)



Material

- ExoCrylic™
- Left-hand drain.

Required Accessories

K-7271 Slotted Overflow Bath Drain

or

K-7272 Slotted Overflow Bath Drain

ADA

Codes/Standards

ASME A112.19.7/CSA B45.10
CSA B45.5/IAPMO Z124
UL 1795
CSA C22.2 No. 218.2
ADA
ICC/ANSI A117.1

KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

Available Color/Finishes





Color tiles intended for reference only.

Color	Code	Description
0	White	
33	Mexican Sand™	
47	Almond	
58	Thunder™ Grey	
7	Black Black™	
95	Ice™ Grey	
96	Biscuit	
G9	Sandbar	
K4	Cashmere	
NY	Dune	



Archer®
5' Bath Whirlpool
K-1947-LA

No change in measurements if connected with drain illustrated. (K-7272)

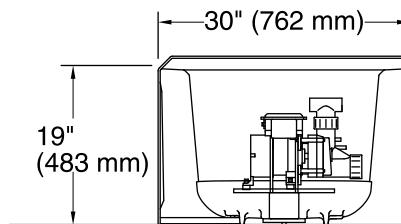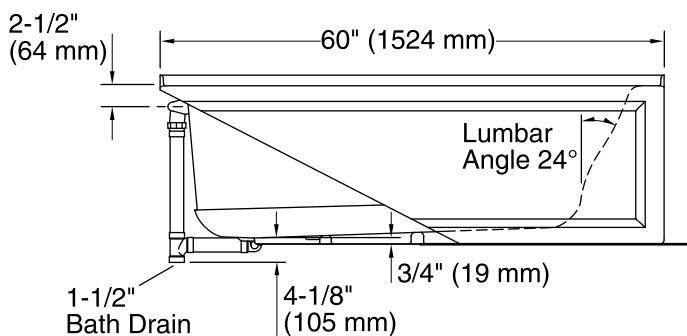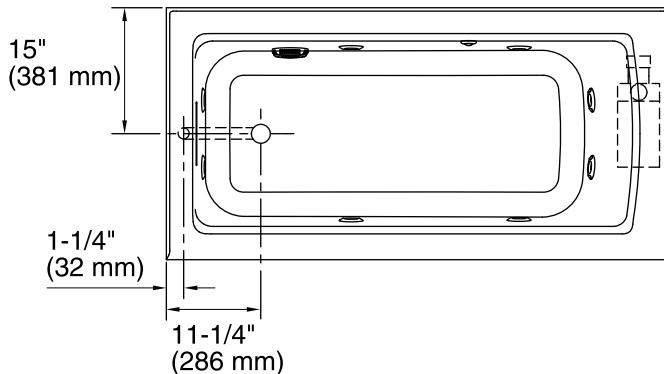

Required Electrical Service

One circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI) or Residual Current Device (RCD).

Pump: 120 V, 15 A, 60 Hz

Max Length to Outlet: 24" (610 mm)

Locate the outlet behind the bathing unit and within the maximum distance specified above.

Technical Information

All product dimensions are nominal.

Installation: 3-Wall Alcove

Drain location: Left

Basin area, bottom: 45-1/8" x 19-11/16" (1146 mm x 500 mm)

Basin area, top: 52-1/8" x 22-1/16" (1324 mm x 560 mm)

Weight: 113 lbs (51.3 kg)

Minimum floor load: 49 lbs/ft² (239.2 kg/m²)

Water depth: 15-1/4" (387 mm)

Water capacity: 57 gal (215.8 L)

Electrical rating: Pump: 120 V, 7 A, 60 Hz

Notes

Install this product according to the installation guide.

Measure your actual product for roughing-in details.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

Pump is supplied with 24" (610 mm) grounding-type plug-in cord.

Floor support under this product must provide for a minimum of 49 lbs/square foot (240 kg/square meter) loading.

ADA compliant when installed to the specific requirements of these regulations.