

### Features


- *ExoCrylic™*
- 8 color-matched Kohler hydro-massage jets
- Pump with air switch and grounding-type plug-in cord
- Slotted overflow for maximum bathing depth
- Low threshold height
- Bask™ heated surface with three temperature settings
- Drop-in installation [K-1947-W1] or integral flange alcove installation [K-1947-LW and K-1947-RW]
- Reversible drain [K-1947-W1] or left/right drain [K-1947-LW and K-1947-RW]
- 60" (1524 mm) x 30" (762 mm) x 19" (483 mm) [K-1947-W1]
- 60" (1524 mm) x 30" (762 mm) x 20-1/4" (514 mm) [K-1947-LW, K-1947-RW]

### 5' BATH WHIRLPOOL WITH BASK™

## K-1947-W1

ALSO K-1947-LW, K-1947-RW

ADA

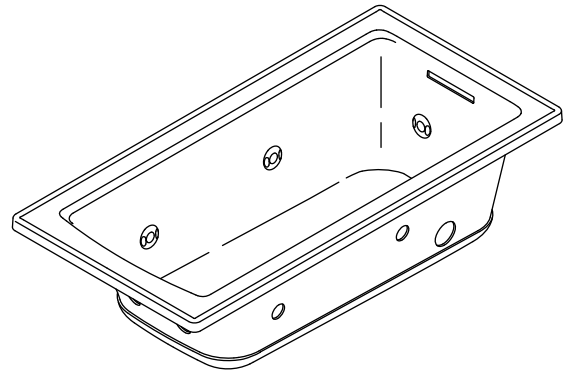

### Codes/Standards Applicable

Specified model meets or exceeds the following:

- ADA
- ICC/ANSI A117.1
- CSA B45.5/IAPMO Z124
- CSA C22.2 No 218.2
- ASME A112.19.7/CSA B45.10
- UL 1795
- NMX-J-521

### Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

### Accessories

- CP: Polished Chrome
- Other: Refer to Price Book for additional colors/finishes

### Specified Model

Model	Description	Colors/Finishes	
K-1947-W1	5' bath whirlpool with Bask – drop-in (shown)	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
K-1947-LW	5' bath whirlpool with Bask – 3-side integral flange, left drain	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
K-1947-RW	5' bath whirlpool with Bask – 3-side integral flange, right drain	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
Required Accessories			
K-7271	Clearflo slotted overflow brass bath drain <b>OR</b>	<input type="checkbox"/> CP	<input type="checkbox"/> Other_____
K-7272	Clearflo slotted overflow bath drain – PVC pipe	<input type="checkbox"/> CP	<input type="checkbox"/> Other_____

### Product Specification

The ExoCrylic bath whirlpool shall be 60" (1524 mm) in length, 30" (762 mm) in width, and 19" (483 mm) in height [K-1947-W1], or 60" (1524 mm) in length, 30" (762 mm) in width, and 20-1/4" (514 mm) in height [K-1947-LW, K-1947-RW]. Bath whirlpool shall feature Bask heated lumbar support with three temperature settings. Bath whirlpool shall feature 8 color-matched jets, and a pump with air switch and grounding-type plug-in cord. Bath whirlpool shall have slotted overflow for maximum bathing depth and low threshold height. Bath whirlpool shall be for drop-in [K-1947-W1] or integral flange alcove [K-1947-LW and K-1947-RW]. Bath whirlpool shall have reversible drain [K-1947-W1] or left/right drain [K-1947-LW and K-1947-RW]. Bath whirlpool shall be Kohler Model K-1947-\_\_\_\_\_-\_\_\_\_\_.

