

Features

- *ExoCrylic™*
- *Bask™* heated surface with three temperature settings
- Drop-in installation
- Slotted overflow for maximum bathing depth
- Low threshold height
- Armrests
- 66" (1676 mm) x 32" (813 mm) x 19" (483 mm)


5.5' DROP-IN BATH WITH BASK® HEATED SURFACE K-1948-W1

ADA

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ADA
- ICC/ANSI A117.1
- CSA B45.5/IAPMO Z124
- UL 1795

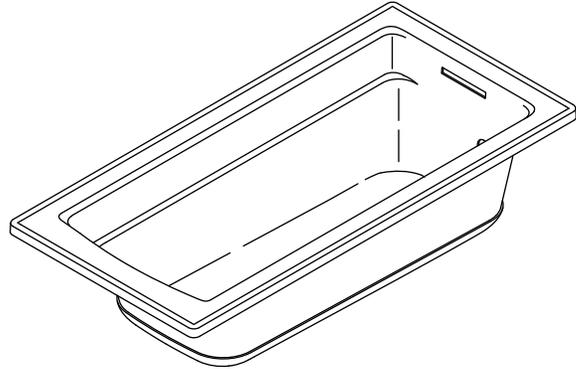

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories:

- CP: Polished Chrome
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Colors/Finishes	
K-1948-W1	5.5' drop-in bath with Bask	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
Required Accessories			
K-7271	Clearflo slotted overflow brass bath drain OR	<input type="checkbox"/> CP	<input type="checkbox"/> Other_____
K-7272	Clearflo slotted overflow bath drain – PVC pipe	<input type="checkbox"/> CP	<input type="checkbox"/> Other_____

Product Specification:

The ExoCrylic drop-in bath shall be 66" (1676 mm) in length, 32" (813 mm) in width, and 19" (483 mm) in height. Bath shall feature Bask heated lumbar support with three temperature settings. Bath shall have slotted overflow for maximum bathing depth, and low threshold height. Bath shall have armrests. Bath shall be Kohler Model K-1948-W1-_____.

ARCHER®

Technical Information

Fixture*:				
Bathing well				
Basin area, bottom	50-3/8" (1280 mm) x 19-5/8" (498 mm)			
Basin area, top	57-5/16" (1456 mm) x 24-1/16" (611 mm)			
Weight	76 lbs (34.4 kg)			
To overflow				
Water depth	15-5/16" (389 mm)			
Capacity	66 gal (248.3 L)			
* Approximate measurements for comparison only.				
Drop-in cutout	64-1/2" (1638 mm) x 30-1/2" (775 mm)			
Heater:	W	V	HZ	A
	65	120	60	0.5

Required Electrical Service

Circuit protected with a Class A Ground-Fault Circuit-Interrupter (GFCI) required:	
Heated surface	120 V, 15 A, 60 Hz

Installation Notes

Install this product according to the installation guide.


Floor support under this product must provide for a minimum of 44.4 lbs/square foot (217 kg/square meter) loading.

Locate a GFCI-protected 120 V, 15 A, grounded electrical outlet within 24" (610 mm) of the bath junction box. A 40" (1016 mm) cable is included.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

This bath is designed for drop-in installation only. It is not suited for use in a three-wall alcove with an overhead shower.

Will comply with **ADA** when installed per Section 607 Bathtubs of the ADA 2010 Standards for Accessible Design.

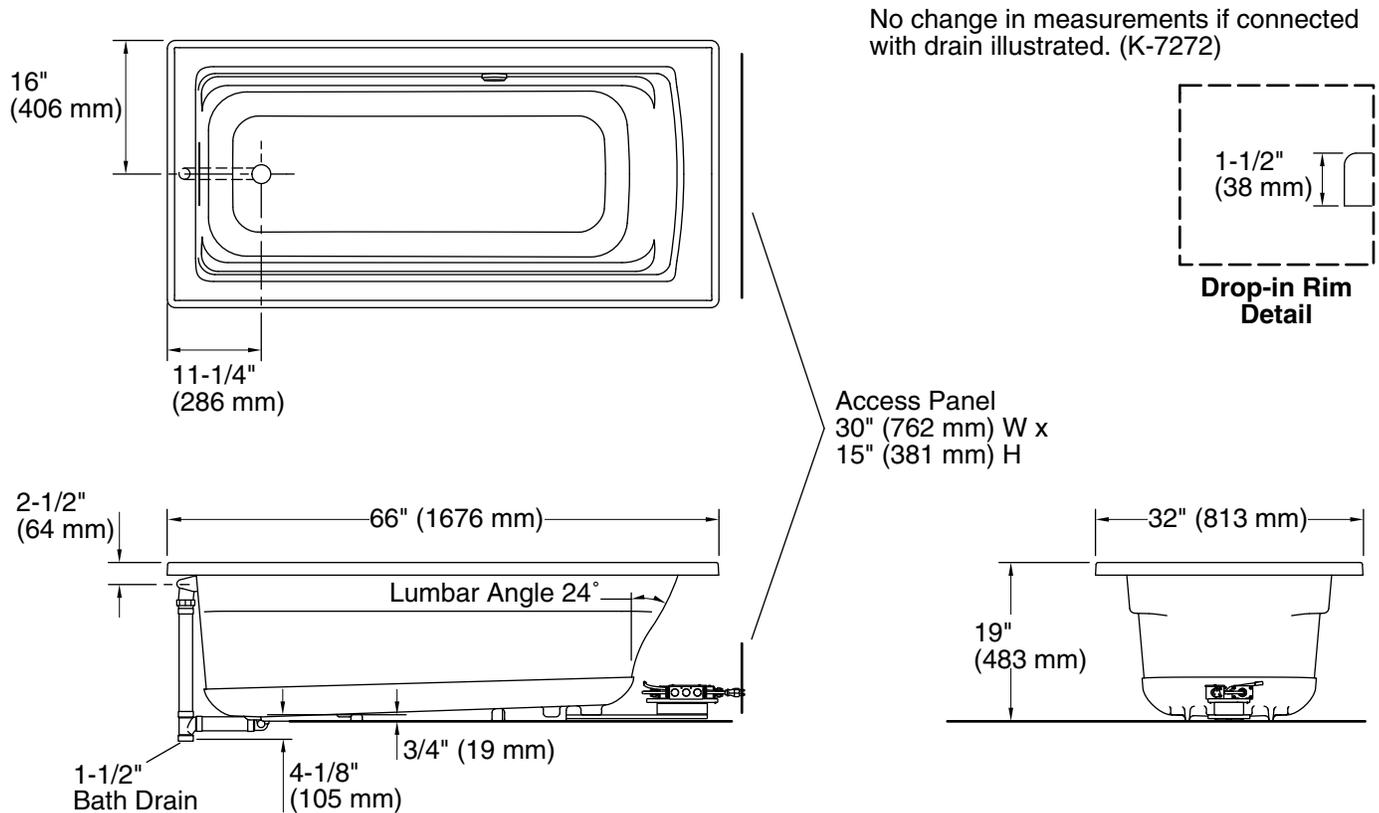

Product Diagram