


### Features

- Acrylic
- Drop-in installation
- Armrests
- Bask heated lumbar support with three temperature settings
- Textured bottom surface
- Slotted overflow for maximum bathing depth
- Low threshold height
- 72" (1829 mm) x 36" (914 mm) x 20-1/2" (521 mm)

### DROP-IN BATH WITH BASK™ HEATED SURFACE K-1125-W1

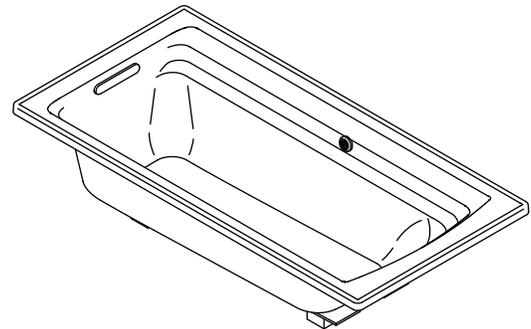

### Codes/Standards Applicable

Specified model meets or exceeds the following:

- CSA B45.5/IAPMO Z124
- ASTM E162
- ASTM E662
- UL 1795

### Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

### Accessories:

- 0: White
- CP: Polished Chrome
- PB: Vibrant® Polished Brass
- Other: Refer to Price Book for additional colors/finishes

### Specified Model

Model	Description	Colors/Finishes		
K-1125-W1	Drop-in bath with Bask heated surface	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____	
<b>Recommended Accessories</b>				
K-7271	Clearflo slotted overflow brass bath drain <b>OR</b>	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other_____
K-7272	Clearflo slotted overflow bath drain – PVC pipe	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other_____
<b>Optional Accessories</b>				
K-9529	Removable bath seat	<input type="checkbox"/> 0		
K-1491	Bath pillow	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____	
K-1601	Bath footstop	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____	

### Product Specification

The acrylic drop-in bath shall be 72" (1829 mm) in length, 36" (914 mm) in width, and 20-1/2" (521 mm) in height. Bath shall feature slotted overflow for maximum bathing depth and low threshold height. Bath shall feature Bask heated lumbar support with three temperature settings. Bath shall have armrests and features a textured bottom surface. Bath shall be Kohler Model K-1125-W1-\_\_\_\_\_.

# ARCHER™

## Technical Information

Fixture*:				
Bathing well:				
Basin area, bottom	51-3/8" (1304 mm) x 21" (533 mm)			
Basin area, top	64-1/2" (1638 mm) x 30-1/2" (775 mm)			
Weight	70 lbs (31.7 kg)			
To overflow:				
Water depth	15" (381 mm)			
Capacity	72 gal (273 L)			
* Approximate measurements for comparison only.				
Drop-in cutout				
70-1/2" (1791 mm) x 34-1/2" (877 mm)				
Heater:				
	W	V	HZ	A
	65	120	60	.5

## Installation Notes

Install this product according to the installation guide.


Locate a GFCI-protected 120 V, 15 A, grounded electrical outlet within 24" (610 mm) of the bath junction box.

40" (1016 mm) cable is included.

Floor support under this product must provide for a minimum of 39 lbs/square foot (189 kg/square meter) loading.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

This bath is designed for drop-in installation only. It is not suited for use in a three wall alcove with an overhead shower.

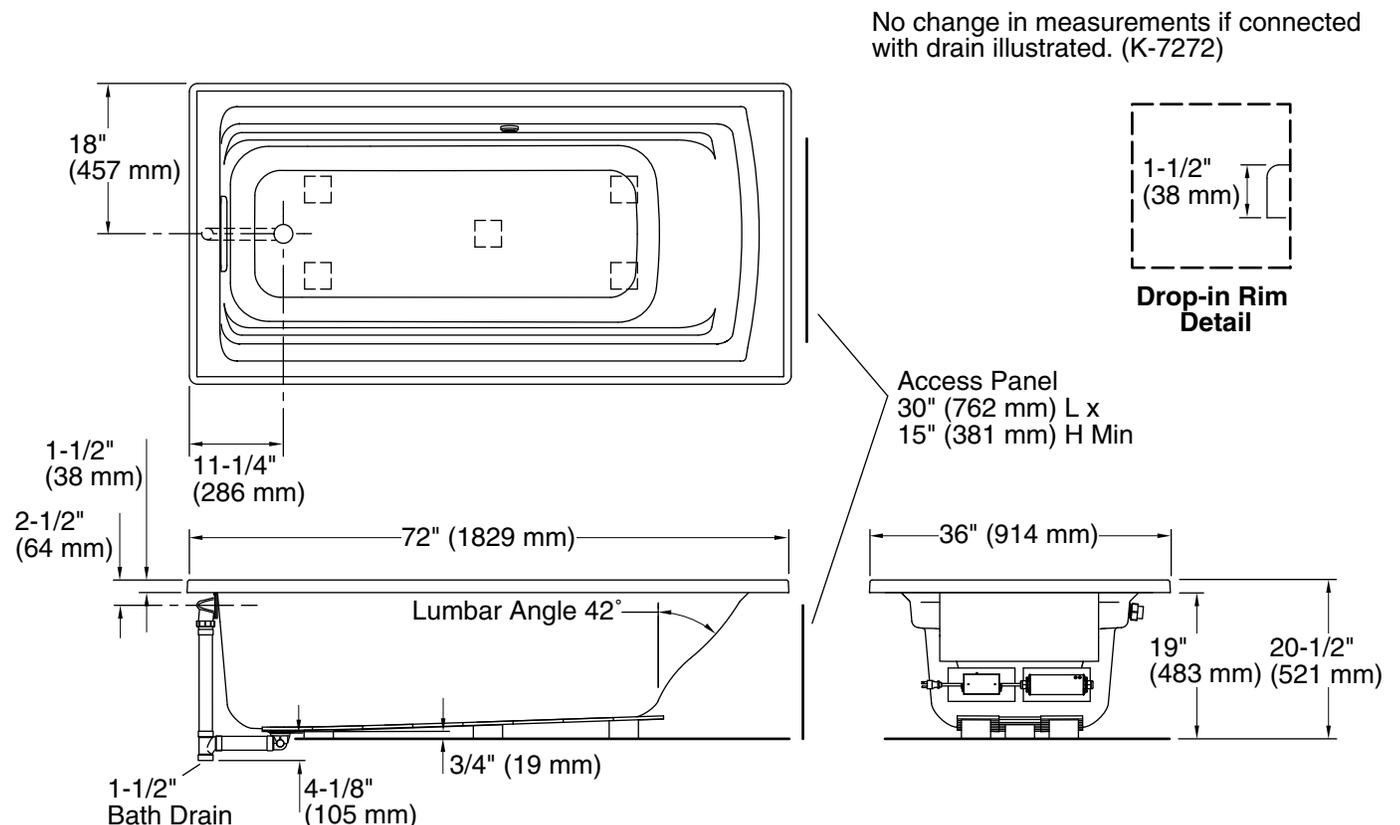

## Product Diagram

ARCHER™ DROP-IN BATH WITH BASK™ HEATED SURFACE

Page 2 of 2  
1201637-4-B

THE BOLD LOOK  
OF **KOHLER**®