

## Features

- 8" (203 mm) centers.
- Swivel/rigid gooseneck spout.
- 9-11/16" (246 mm) spout reach.
- 1/4-turn full brass ceramic valve.
- 2.0 gpm (7.6 lpm) maximum flow rate at 60 psi (4.14 bar).
- Vandal-resistant aerator.
- 4-1/16" vandal-proof metal wristblade lever handles.
- Integral Supply Stops with lock key for easy and convenient access.
- Drain sold separately.

## Material

- Solid brass construction with thick chrome plating for rough commercial applications.

## Installation

- Eccentric inlet shanks for easy installation.

## Recommended Products/Accessories

K-23723 Faucet cleaner



**ADA**

**CSA B651**

**OBC**

## Codes/Standards

ASME A112.18.1/CSA B125.1

DOE - Energy Policy Act 1992

ADA

ICC/ANSI A117.1

CSA B651

OBC

## KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

## Available Colors/Finishes

*Color tiles intended for reference only.*


### Color   Code   Description



CP   Polished Chrome

# KOHLER® Faucets

**Triton® Bowe®**  
Sink faucet  
**K-830T70-5AEA**

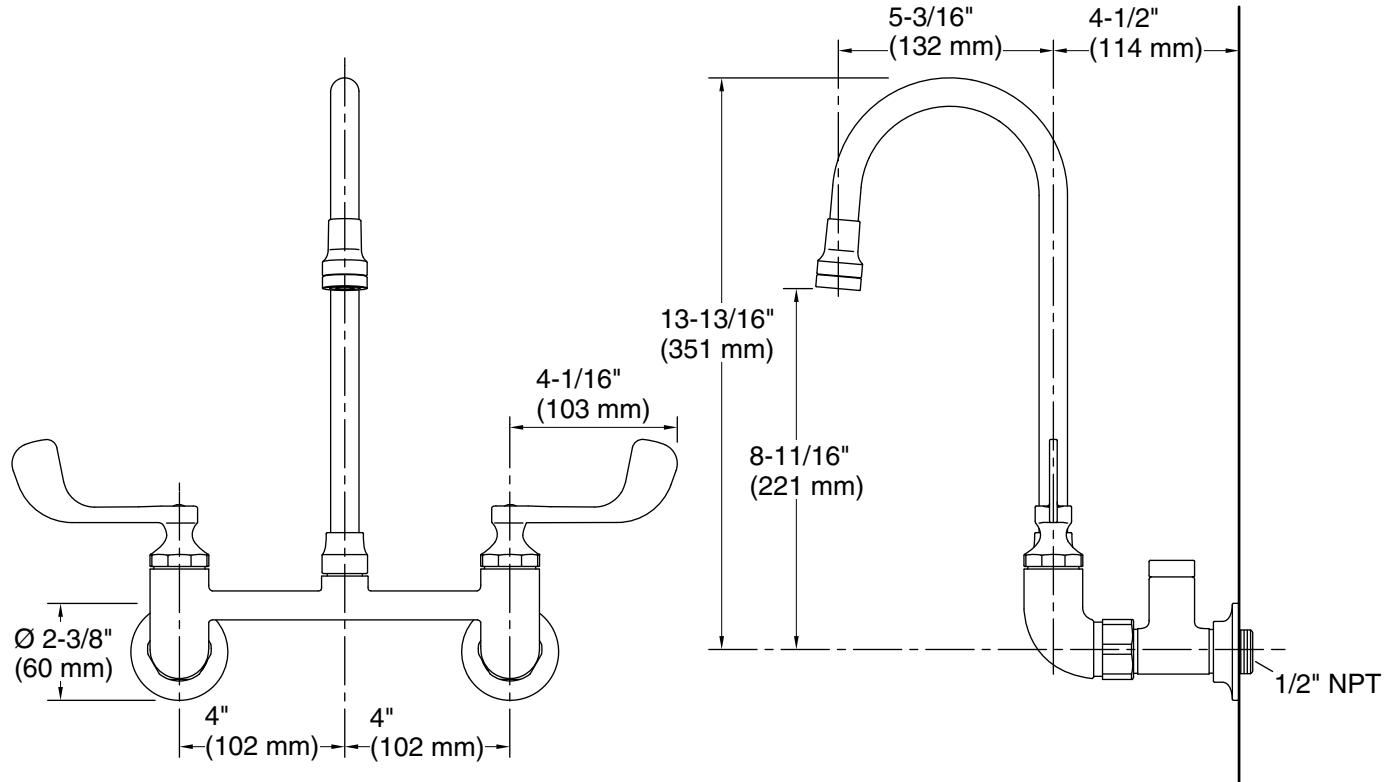

## Technical Information

All product dimensions are nominal.

### Faucet:

Flow rate: 2 gal/min (7.6 l/min)  
Pressure: 60 psi (4.1 bar)  
Valve body: Cast brass  
Drain included: No

### Spout:

Spout reach: 9-11/16" (246 mm)  
Handle clearance: 3" (76 mm)

## Notes

Install this product according to the installation instructions.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.