



# Underscore® Rectangle

66" x 36" Heated BubbleMassage™ air bath with Bask™  
K-1173-GHW

## Features

- 122 airjets release thousands of heated bubbles that surround, support, and massage the body.
- Variable-speed blower lets you adjust massage intensity to 18 levels.
- Bask® heated surface creates spa-like relaxation with soothing warmth on your back, shoulders, and neck.
- Built-in heater.
- Automatic and manual purge cycles remove residual water from air channels after use.
- 60-minute automatic shutoff timer.
- Slotted overflow allows for deep soaking.
- Generous 66" length provides spacious bathing for up to two people.
- Integral lumbar support.
- Keypad control.
- Textured bottom surface.
- Bask® heated surface creates spa-like relaxation with soothing warmth on your back, shoulders, and neck.

## Material

- Acrylic.

## Technology

- Heated BubbleMassage™ technology warms and humidifies air before it enters the bath.

## Installation

- Drop-in or undermount.
- Reversible drain.

## Required Products/Accessories

K-7271 Brass Slotted Overflow Bath Drain  
or

K-7272 PVC Slotted Overflow Bath Drain

## Recommended Products/Accessories

K-1491 Bath/Whirlpool Pillow  
K-1601 Bath/Whirlpool Footstop  
K-1703 Whirlpool Remote Control  
K-531 Under-Mount Installation Kit  
K-24916 Wireless Music Kit  
K-706000-D3 Frameless Sliding Bath Door  
K-706000-L Frameless Sliding Bath Door  
K-706003-L Frameless Sliding Bath Door  
K-706004-D3 Frameless Sliding Bath Door  
K-706004-L Frameless Sliding Bath Door  
K-706007-L Frameless Sliding Bath Door  
K-1177 Vinyl Tiling-in Bead



## Codes/Standards

ASME A112.19.7/CSA B45.10  
CSA B45.5/IAPMO Z124  
ASTM E162  
ASTM E662  
UL 1795  
CSA C22.2 No. 218.2

**KOHLER® Hydrotherapy Components**  
**Five-Year Limited Warranty**  
**KOHLER® Plastic Baths and Receptors**  
**Lifetime Limited Warranty**

See website for detailed warranty information.

## Available Colors/Finishes

*Color tiles intended for reference only.*


| Color | Code | Description   |
|-------|------|---------------|
|       | 0    | White         |
|       | 96   | Biscuit       |
|       | NY   | Dune          |
|       | 95   | Ice™ Grey     |
|       | 58   | Thunder™ Grey |
|       | 7    | Black Black™  |




# Underscore® Rectangle

66" x 36" Heated BubbleMassage™ air bath with Bask™

K-1173-GHW

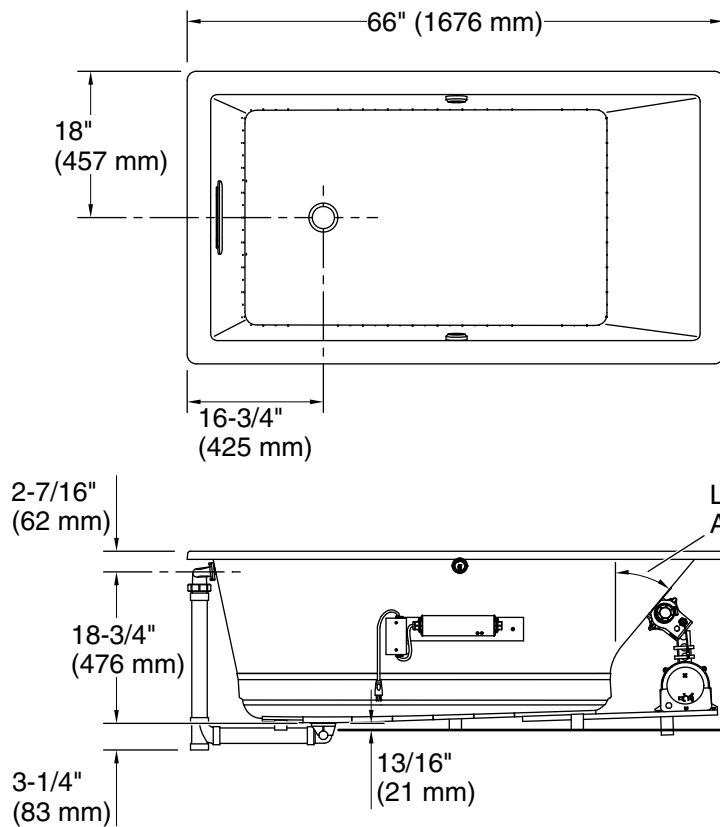


No change in measurements if connected with drain illustrated. (K-7272)

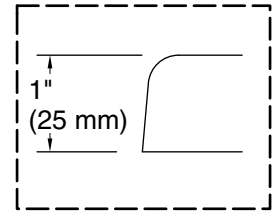

Drop-in Rim Detail

Blower Motor Access  
30" (762 mm) W x 15" (381 mm) H Min

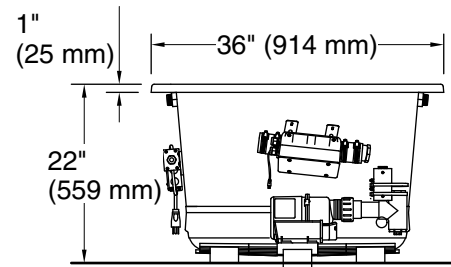

1-1/2" Bath Drain

## Required Electrical Service

Two dedicated circuits required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI). Outside North America, this device may be known as a Residual Current Device (RCD).

|                |                    |
|----------------|--------------------|
| Blower, Heated | 120 V, 15 A, 60 Hz |
| Surface:       |                    |
| Air bath:      | 120 V, 15 A, 60 Hz |

## Notes

Measure your actual product for rough-in details. Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

## Technical Information

All product dimensions are nominal.

|                              |   |
|------------------------------|---|
| Installation:                | Drop-in, Undermount   |
| Drain location:              | End   |
| Basin area, bottom:          | 44-1/2" x 26-1/2" (1130 mm x 673 mm)                                  |
| Basin area, top:             | 60-1/4" x 30-1/4" (1530 mm x 768 mm)                                  |
| Weight:                      | 111 lbs (50.3 kg)   |
| Minimum floor load:          | 60 lbs/ft <sup>2</sup> (292.9 kg/m <sup>2</sup> )                     |
| Water depth:                 | 17-3/4" (451 mm)  |
| Water capacity:              | 102 gal (386.1 L)   |
| Cutout:                      | Drop-in, 65" x 35" (1651 mm x 889 mm)                                 |
| Electrical component rating: | Blower: 120 V, 10 A, 60 Hz<br>Heated Surface: 120 V, 0.5 A, 60 Hz, 65 |

1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current Specification Sheet, go to [www.kohler.com](http://www.kohler.com).

8-9-2020 08:55 - US/CA

