

Features

- Modern, simplistic exposed thermostatic valve serves as a hub for shower controls.
- Mechanically controlled thermostatic mixing valve maintains outlet temperature throughout shower experience.
- Control panel includes adjustable temperature dial with integrated adjustable high-temperature limit feature and shower outlet on/off buttons.
- When pressed once, shower outlet turns on and button pops out, becoming a knob for water flow adjustment.
- When pressed back in, water turns off and outlet button aligns with control plate surface; flow setting remains intact.
- 1/2" Universal NPT and direct sweat inlets and outlets.
- Requires a single-function rainhead, handshower, and hose (sold separately).

Material

- Premium material construction for durability and reliability.
- KOHLER finishes resist corrosion and tarnishing.

Technology


- Thermostatic technology automatically maintains outlet temperature within +/- 3.6°F (+/- 2°C) during water pressure fluctuations.

Installation

- Valve is fully serviceable from control panel.

Recommended Products/Accessories

K-26282 Round multifunction 2.5 gpm handshower
K-26282-G Round multifunction 1.75 gpm handshower
K-26284 Oval multifunction 2.5 gpm handshower
K-26284-G Oval multifunction 1.75 gpm handshower
K-26294 Oval 12" rainhead with Katalyst® technology
K-9514 60" Shower Hose




Codes/Standards

None Applicable

KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

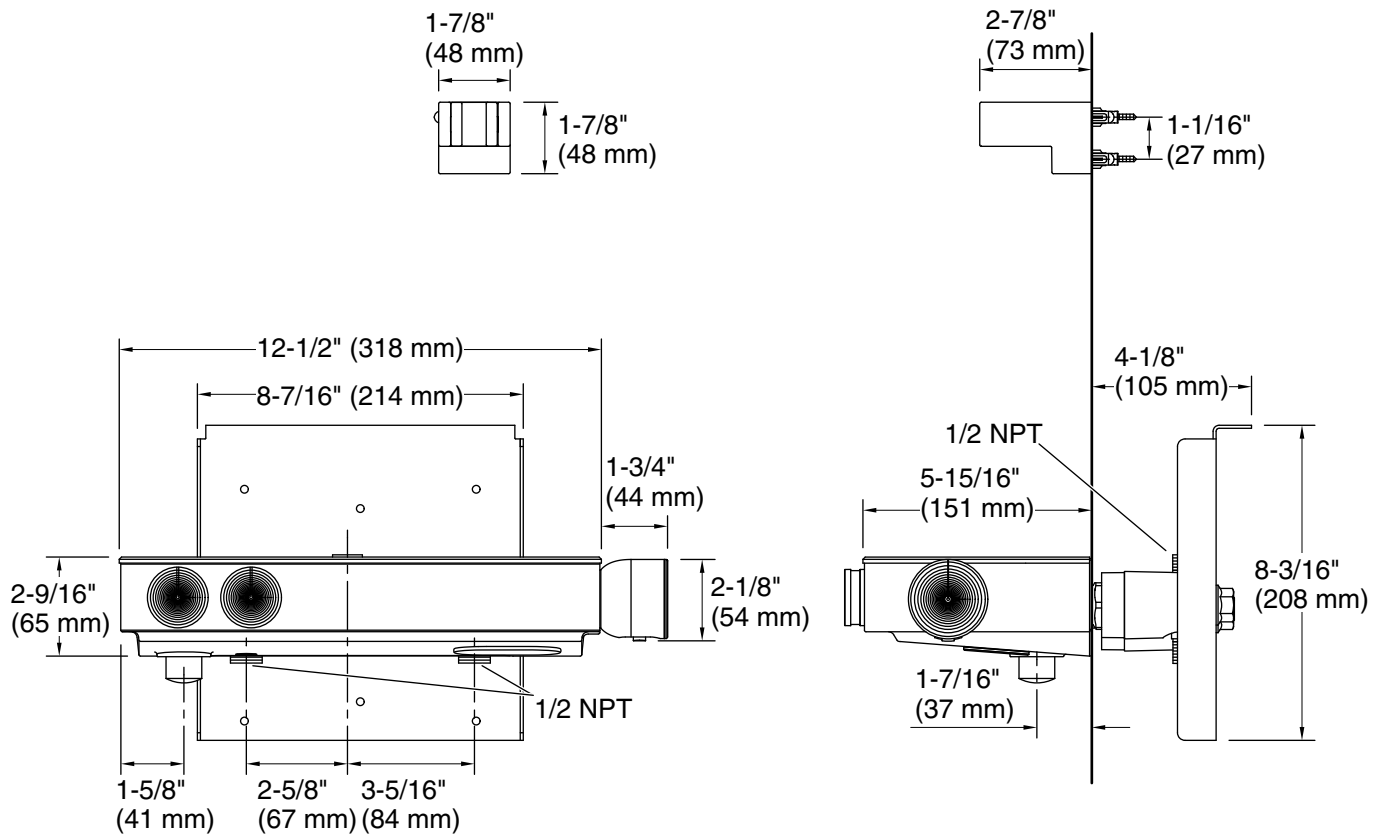

Technical Information

All product dimensions are nominal.

Shower Valve:

Flow Rate (Max) @ 45 psi	5 gal/min (18.9 l/min)
Manufacturer's minimum rated flow:	1.3 gal/min (4.9 l/min)
Pressure:	45 psi (3.1 bar)
Maximum (Static) Pressure:	125 psi (8.6 bar)
Minimum (Operating) Pressure:	20 psi (1.4 bar)
Drain included:	No