



Volute™

63" x 28-3/8" freestanding bath with shroud
K-29327-0

Features

- Freestanding design creates a striking focal point in your bathing area
- Rectangular basin creates a spacious bathing experience
- Integral lumbar support on both ends
- Slotted overflow allows for deep soaking
- 12-1/16" (306 mm) deep-soaking depth provides a luxurious bathing experience
- Safeguard® slip-resistant surface provides excellent traction underfoot
- Center drain
- Drain and integral overflow preinstalled to reduce installation time
- Sleek straight shroud design is easy to clean and lends itself to both transitional and contemporary bathrooms
- Requires K-36361 Volute bath drain trim (sold separately)

Material

- KOHLER® enameled cast iron bath
- White acrylic shroud
- Brass drain

Installation

- Freestanding

Required Products/Accessories

For freestanding installation
K-36361 Bath drain trim



Codes/Standards

ASME A112.19.1/CSA B45.2


KOHLER® Enameled Cast Iron Bath and Shower Base Lifetime Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes




Color tiles intended for reference only.

| Color | Code | Description |
|-------|------|-------------|
|-------|------|-------------|

| | | |
|---|---|-------|
|  | 0 | White |
|---|---|-------|



Volute™
63" x 28-3/8" freestanding bath with shroud
K-29327-0

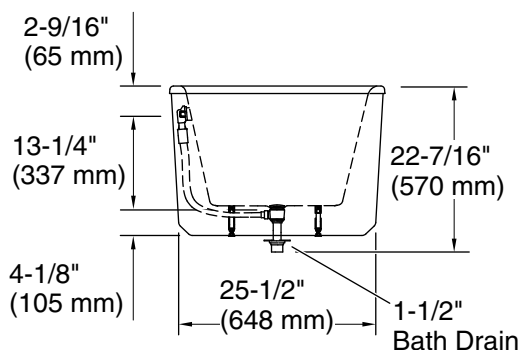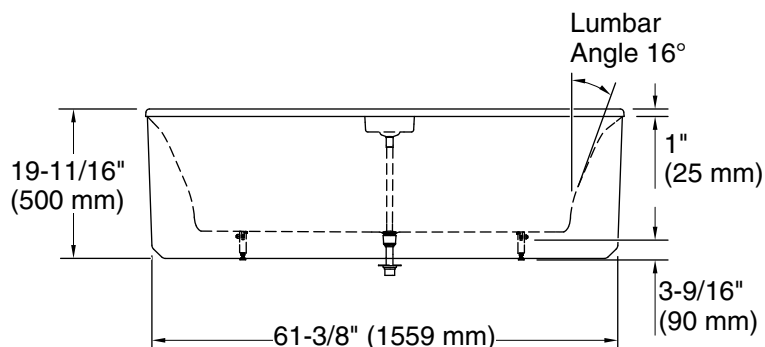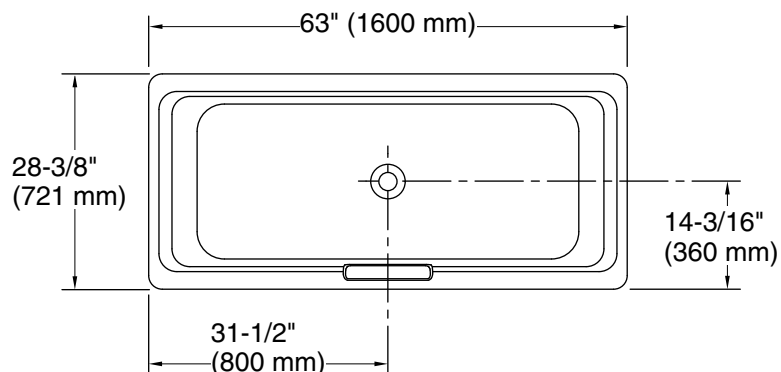

Technical Information

All product dimensions are nominal.

| | |
|---------------------|--|
| Drain location: | Center |
| Basin area, bottom: | 50-5/16" x 20-3/8" (1278 mm x 518 mm) |
| Basin area, top: | 60-1/4" x 23-11/16" (1531 mm x 602 mm) |
| Weight: | 370 lbs (167.8 kg) |
| Minimum floor load: | 62.8 lbs/ft² (306.6 kg/m²) |
| Water depth: | 12-1/8" (308 mm) |
| Water capacity: | 45.97 gal (174 L) |

Notes

Measure your actual product for rough-in details.

Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

Install this product according to the installation instructions.