

Stillness[™] Smart Soak

46" x 46" freestanding bath **K-31404-PF**

Features

- Freestanding design creates a striking focal point in your bathing area
- 23-5/8" (600 mm) depth offers a deep soaking experience
- Integral lumbar support
- PerfectFill[™] technology conveniently fills the bathtub from the bottom; no bath faucet or filler necessary
- Integrated drain and overflow
- AutoFill feature closes drain and fills bath to desired level and temperature; no monitoring necessary
- Remote control
- Freestanding bath stool handcrafted from Japanese Hinoki wood assures easy access to your bath (sold separately)

Material

Acrylic

Installation

Freestanding



Codes/Standards

CSA B45.5/IAPMO Z124 ASTM E162 ASTM E662 UL 1795 CSA C22.2 No. 218.2 IAPMO Certification cUL Listed UL Listed

KOHLER[®] Plastic Baths and Shower Bases Lifetime Limited WarrantyKOHLER[®] Hydrotherapy Components Five-Year Limited Warranty


See website for detailed warranty information.





Stillness[™] Smart Soak

46" x 46" freestanding bath **K-31404-PF**

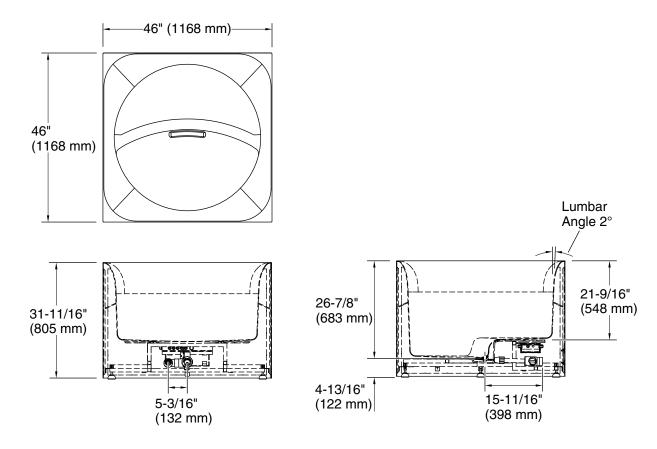

Required Electrical Service

Two circuits required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI). Outside North America, this device may be known as a Residual Current Device (RCD).

Controller module: 120 V, 15 A, 60 Hz Thermostatic valve: 120 V, 15 A, 60 Hz

Technical Information

All product dimensions are nominal.

Drain location:	Center
Basin area, bottom:	38-15/16" x 38-15/16" (988 mm x
	988 mm)
Basin area, top:	39-7/8" x 39-7/8" (1012 mm x 1012 mm)
Weight:	254 lbs (115.2 kg)
Water depth:	23-5/8" (600 mm)
Water capacity:	111.5 gal (422.1 L)
Template:	1522874-7, not required, included
Electrical component rating:	Controller module: 120 V, .033 A, 60 Hz Thermostatic valve: 120 V, .16 A, 60 Hz

Notes

Measure your actual product for rough-in details.

Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

