

Prologue® Top-mount/undermount double-equal kitchen sink kit K-31465-1PC

#### Features

- 36" (914 mm) minimum base cabinet width.
- Double-equal bowls.
- 9" (229 mm) depth provides generous workspace.
- Rounded 0.98" (25 mm) corners are easy to clean.
- Single faucet hole.
- Two-function pull-down sprayhead allows you to switch from aerated stream to Sweep® spray.
- Sweep® spray features specially angled nozzles that form a wide, powerful blade of water to sweep your dishes and sink clean.
- MasterClean<sup>™</sup> sprayface features an easy-to-clean surface that withstands mineral buildup.
- Box includes: Sink, assembled Vibrant Stainless pull-down faucet, sink rack, two drains and strainers, installation hardware.

### Material

- Premium 18-gauge stainless steel.
- Durable material construction.
- KOHLER stainless steel sinks resist corrosion and tarnishing.

### Installation

• Top-mount or undermount.

#### **Recommended Products/Accessories**

K-23726 Drain treatment K-23729 Stainless steel cleaner

#### **Optional Products/Accessories**

K-11352 Disposal Flange with Stopper K-8801 Sink drain and strainer with tailpiece K-8799 Sink drain and strainer basket K-31472 Sink rack

#### **Included Components**

Additional Components:

31472 7400 (Qty 2) Installation Hardware Pull-down faucet



# **Codes/Standards**

ASME A112.18.1/CSA B125.1 ASME A112.19.3/CSA B45.4 NSF/ANSI 61 NSF/ANSI 372 All applicable US Federal and State material regulations DOE - Energy Policy Act 1992 California Energy Commission (CEC)


KOHLER® Stainless Steel Sinks Lifetime Limited WarrantyKOHLER® Faucet Lifetime Limited Warranty See website for detailed warranty information.

1-800-4KOHLER (1-800-456-4537) Kohler Co. reserves the right to make revisions without notice to product specifications. For the most current Specification Sheet, go to <u>www.kohler.com</u>. 11-10-2021 04:53 - US/CA





# Prologue® Top-mount/undermount double-equal kitchen sink kit K-31465-1PC

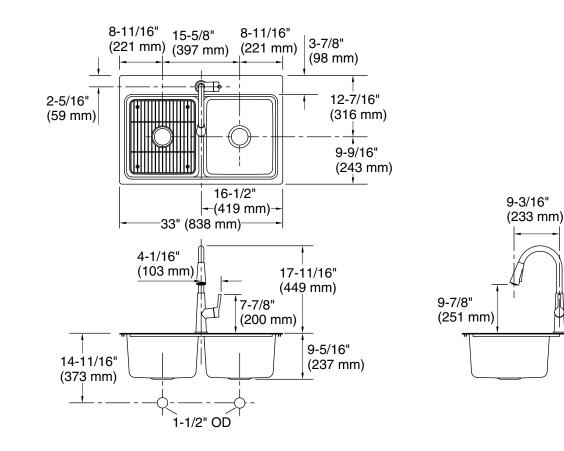

# **Technical Information**

All product dimensions are nominal.	
Bowl configuration:	Double equal
Installation:	Top-mount, Undermount
Min. base cabinet width:	36" (914 mm)
Bowl area (Left):	Length: 14-3/8" (365 mm) Width: 16-1/8" (410 mm) Bowl depth: 9" (229 mm) Water depth: 9" (229 mm)
Bowl area (Right):	Length: 14-3/8" (365 mm) Width: 16-1/8" (410 mm) Bowl depth: 9" (229 mm) Water depth: 9" (229 mm)
With overflow:	No
Number of deck holes:	1
Faucet hole(s):	1-7/16" (37 mm)
Drain hole:	3-5/8" (92 mm)
Template:	Top-mount/Undermount, 1442591-7, required, included

#### Notes

Install this product according to the installation instructions.

